



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Gold 6252, 2.10GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.


SPECrate2017_int_base = 514

SPECrate2017_int_peak = 535

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

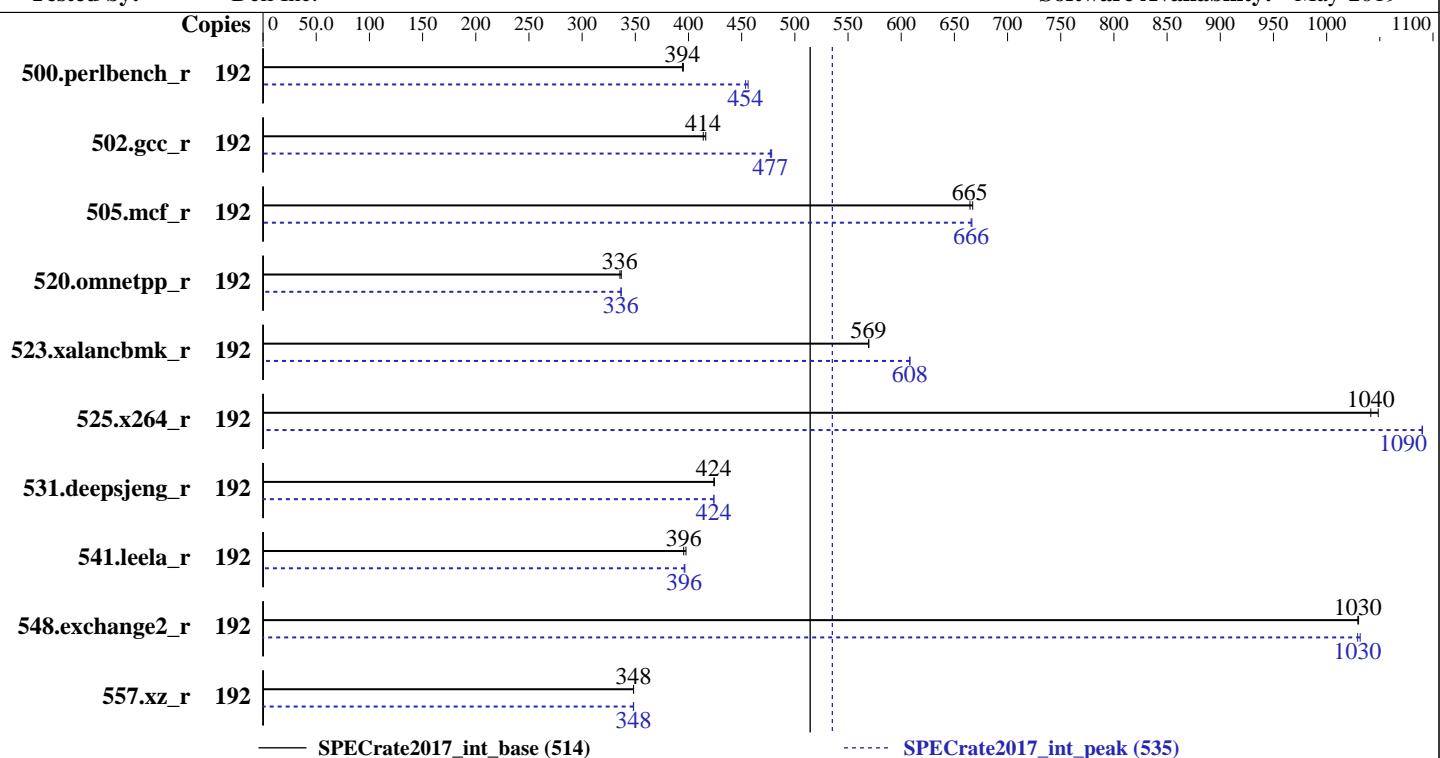

— SPECrate2017_int_base (514)

---- SPECrate2017_int_peak (535)

Hardware

CPU Name: Intel Xeon Gold 6252
Max MHz.: 3700
Nominal: 2100
Enabled: 96 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 35.75 MB I+D on chip per chip
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Ubuntu 18.04.2 LTS
Compiler: kernel 4.15.0-45-generic
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
Compiler Build 20190416 for Linux;
Compiler: Fortran: Version 19.0.4.227 of Intel Fortran
Compiler Build 20190416 for Linux
Parallel: No
Firmware: Version 2.2.9 released May-2019
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 514

SPECrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	773	395	775	394			192	674	454	670	456				
502.gcc_r	192	653	416	657	414			192	569	478	570	477				
505.mcf_r	192	465	667	467	665			192	466	666	466	666				
520.omnetpp_r	192	751	336	748	337			192	749	336	748	337				
523.xalancbmk_r	192	356	569	356	570			192	333	608	333	608				
525.x264_r	192	323	1040	321	1050			192	308	1090	309	1090				
531.deepsjeng_r	192	519	424	519	424			192	519	424	519	424				
541.leela_r	192	804	396	800	398			192	803	396	802	397				
548.exchange2_r	192	488	1030	489	1030			192	489	1030	488	1030				
557.xz_r	192	595	348	595	348			192	595	348	596	348				

SPECrate2017_int_base = 514

SPECrate2017_int_peak = 535

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 514

SPECrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Platform Notes

BIOS settings:

ADDDC setting disabled

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on intel-sut Thu Jul 25 03:11:06 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

physical 2: cores 0 1 2 3 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

On-line CPU(s) list: 0-191

Thread(s) per core: 2

Core(s) per socket: 24

Socket(s): 4

NUMA node(s): 8

Vendor ID: GenuineIntel

CPU family: 6

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_int_base = 514

SPECCrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Platform Notes (Continued)

Model: 85
Model name: Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz
Stepping: 6
CPU MHz: 3269.872
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s):
0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,176,184
NUMA node1 CPU(s):
1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185
NUMA node2 CPU(s):
2,10,18,22,26,34,42,50,58,66,82,90,98,106,114,118,122,130,138,146,154,162,178,186
NUMA node3 CPU(s):
3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187
NUMA node4 CPU(s):
4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188
NUMA node5 CPU(s):
5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189
NUMA node6 CPU(s):
6,14,30,38,46,54,62,70,74,78,86,94,102,110,126,134,142,150,158,166,170,174,182,190
NUMA node7 CPU(s):
7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152 160 168 176 184
node 0 size: 95145 MB

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_int_base = 514

SPECCrate2017_int_peak = 535

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

```
node 0 free: 94851 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153 161 169
177 185
node 1 size: 96763 MB
node 1 free: 96507 MB
node 2 cpus: 2 10 18 22 26 34 42 50 58 66 82 90 98 106 114 118 122 130 138 146 154 162
178 186
node 2 size: 96742 MB
node 2 free: 96526 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155 163 171
179 187
node 3 size: 96763 MB
node 3 free: 96546 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156 164 172
180 188
node 4 size: 96763 MB
node 4 free: 96532 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157 165 173
181 189
node 5 size: 96763 MB
node 5 free: 96540 MB
node 6 cpus: 6 14 30 38 46 54 62 70 74 78 86 94 102 110 126 134 142 150 158 166 170 174
182 190
node 6 size: 96763 MB
node 6 free: 96562 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159 167 175
183 191
node 7 size: 96761 MB
node 7 free: 96537 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  21  21  21  11  21  21  21
  1: 21  10  21  21  21  11  21  21
  2: 21  21  10  21  21  21  11  21
  3: 21  21  21  10  21  21  21  11
  4: 11  21  21  21  10  21  21  21
  5: 21  11  21  21  21  10  21  21
  6: 21  21  11  21  21  21  10  21
  7: 21  21  21  11  21  21  21  10
```

From /proc/meminfo
MemTotal: 791006940 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 514

PowerEdge R840 (Intel Xeon Gold 6252, 2.10GHz)

SPECrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="18.04.2 LTS (Bionic Beaver)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 18.04.2 LTS"
  VERSION_ID="18.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
Linux intel-sut 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB
```

run-level 5 Jul 25 03:01

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  439G  37G  380G   9%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.9 05/08/2019

Memory:

```
24x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
24x Not Specified Not Specified
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 502.gcc_r(peak)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 514

PowerEdge R840 (Intel Xeon Gold 6252, 2.10GHz)

SPECrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Compiler Version Notes (Continued)

19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CC 500.perlbench_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CXXC 523.xalancbmk_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

FC 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R840 (Intel Xeon Gold 6252, 2.10GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017_int_base = 514

SPECrate2017_int_peak = 535

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 514

PowerEdge R840 (Intel Xeon Gold 6252, 2.10GHz)

SPECrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 514

PowerEdge R840 (Intel Xeon Gold 6252, 2.10GHz)

SPECrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

Peak Optimization Flags (Continued)

505.mcf_r (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE2.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_int_base = 514

SPECCrate2017_int_peak = 535

CPU2017 License: 55

Test Date: Jul-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: May-2019

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-24 23:11:05-0400.

Report generated on 2019-08-21 12:02:45 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-20.