



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

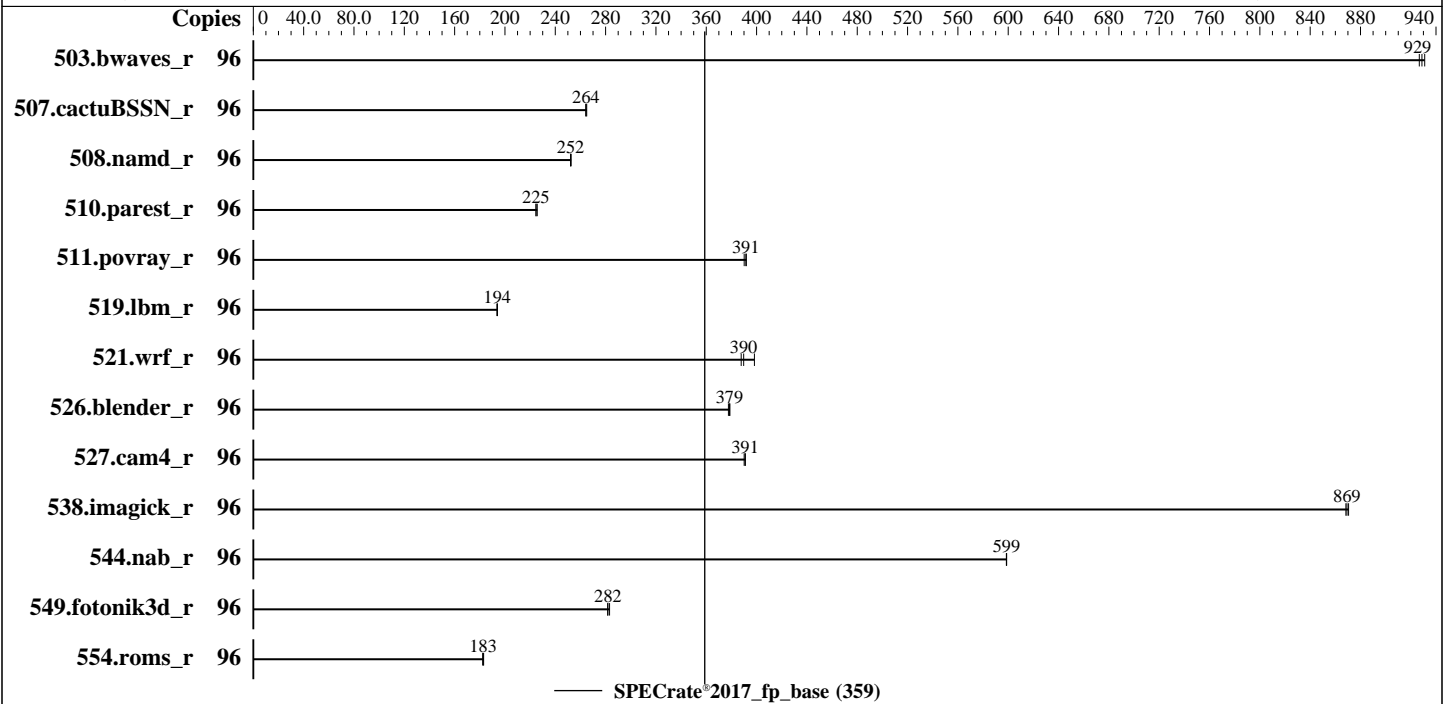

Hardware

CPU Name: Intel Xeon Gold 6246
 Max MHz: 4200
 Nominal: 3300
 Enabled: 48 cores, 4 chips, 2 threads/core
 Orderable: 1, 2, 3, 4 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 400 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64)
 Kernel 4.12.14-23-default
 Compiler: C/C++: Version 19.0.2.187 of Intel C/C++
 Compiler Build 20190117 for Linux;
 Fortran: Version 19.0.2.187 of Intel Fortran
 Compiler Build 20190117 for Linux
 Parallel: No
 Firmware: HPE BIOS Version U34 05/21/2019 released Jun-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2019
Hardware Availability: Jun-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1036	929	1034	931	1039	927							
507.cactuBSSN_r	96	460	264	459	265	460	264							
508.namd_r	96	361	253	362	252	362	252							
510.parest_r	96	1118	225	1113	226	1118	225							
511.povray_r	96	572	392	573	391	575	390							
519.lbm_r	96	522	194	522	194	522	194							
521.wrf_r	96	552	390	555	388	540	398							
526.blender_r	96	386	379	387	378	386	379							
527.cam4_r	96	430	390	429	391	429	391							
538.imagick_r	96	275	868	274	871	275	869							
544.nab_r	96	270	599	270	599	270	599							
549.fotonik3d_r	96	1327	282	1321	283	1328	282							
554.roms_r	96	833	183	837	182	835	183							

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_u2/lib/ia32:/home/cpu2017_u2/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Enhanced Processor Performance set to Enabled

Workload Profile set to General Throughput Compute

Workload Profile set to Custom

Energy/Performance Bias set to Balanced Performance

Advanced Memory Protection set to Advanced ECC

sysinfo program /home/cpu2017_u2/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on dl580-sles15 Tue Jul 23 19:30:09 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6246 CPU @ 3.30GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 4 9 10 11 16 17 18 19 27

physical 1: cores 0 1 2 4 9 10 11 16 17 18 19 26

physical 2: cores 0 2 4 8 9 10 17 18 19 20 25 27

physical 3: cores 0 1 2 4 8 10 11 17 18 19 25 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2019
Hardware Availability: Jun-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

Core(s) per socket: 12
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6246 CPU @ 3.30GHz
Stepping: 7
CPU MHz: 3300.000
BogoMIPS: 6600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-5,48-53
NUMA node1 CPU(s): 6-11,54-59
NUMA node2 CPU(s): 12-17,60-65
NUMA node3 CPU(s): 18-23,66-71
NUMA node4 CPU(s): 24-29,72-77
NUMA node5 CPU(s): 30-35,78-83
NUMA node6 CPU(s): 36-41,84-89
NUMA node7 CPU(s): 42-47,90-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 96351 MB
node 0 free: 96135 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 96765 MB
node 1 free: 96535 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

Platform Notes (Continued)

```

node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 96765 MB
node 2 free: 96622 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 96736 MB
node 3 free: 96614 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 96765 MB
node 4 free: 96648 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 96765 MB
node 5 free: 96653 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 96765 MB
node 6 free: 96530 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 96764 MB
node 7 free: 96656 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  21  31  31  31  31  31  31
1:  21  10  31  31  31  31  31  31
2:  31  31  10  21  31  31  31  31
3:  31  31  21  10  31  31  31  31
4:  31  31  31  31  10  21  31  31
5:  31  31  31  31  21  10  31  31
6:  31  31  31  31  31  31  10  21
7:  31  31  31  31  31  31  21  10

```

From /proc/meminfo

MemTotal: 792248204 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15"

VERSION_ID="15"

PRETTY_NAME="SUSE Linux Enterprise Server 15"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15"

uname -a:

Linux dl580-sles15 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2019
Hardware Availability: Jun-2019
Software Availability: Feb-2019

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Jul 23 19:28

SPEC is set to: /home/cpu2017_u2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 371G 95G 276G 26% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 05/21/2019
Memory:
24x UNKNOWN NOT AVAILABLE
24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2019
Hardware Availability: Jun-2019
Software Availability: Feb-2019

Compiler Version Notes (Continued)

```
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

Base Compiler Invocation (Continued)

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10

(3.30 GHz, Intel Xeon Gold 6246)

SPECrate®2017_fp_base = 359

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Jun-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-07-23 10:00:08-0400.

Report generated on 2019-11-05 10:44:13 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-04.