



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Apr-2019

Software Availability: Feb-2019

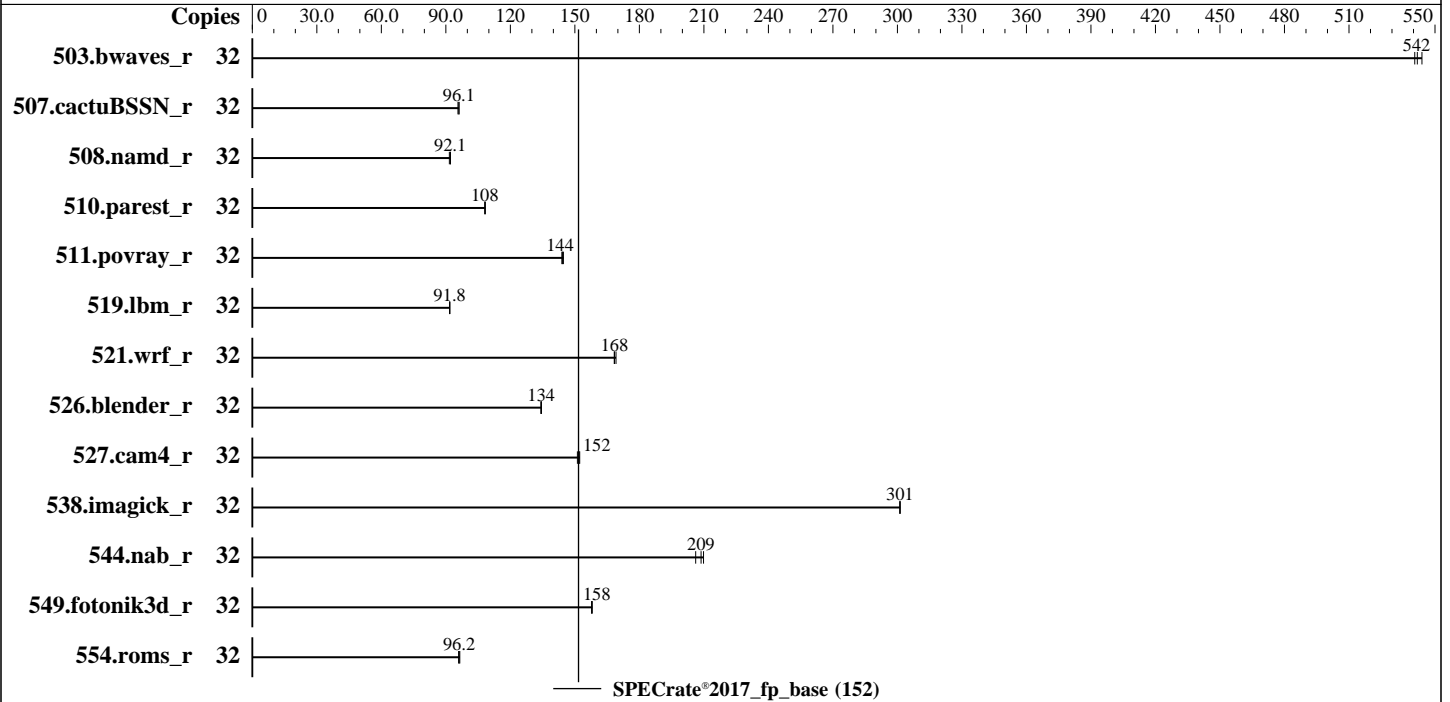

Hardware

CPU Name: Intel Xeon Platinum 8256
 Max MHz: 3900
 Nominal: 3800
 Enabled: 16 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x SATA M.2 SSD, 480 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS for D3753-C1x Version V5.0.0.14 R1.8.0 released Jun-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	590	544	594	541	<u>592</u>	<u>542</u>							
507.cactuBSSN_r	32	422	96.1	<u>422</u>	<u>96.1</u>	424	95.6							
508.namd_r	32	<u>330</u>	<u>92.1</u>	332	91.6	330	92.2							
510.parest_r	32	773	108	<u>774</u>	<u>108</u>	774	108							
511.povray_r	32	519	144	<u>518</u>	<u>144</u>	516	145							
519.lbm_r	32	367	91.9	<u>367</u>	<u>91.8</u>	368	91.7							
521.wrf_r	32	<u>426</u>	<u>168</u>	426	168	424	169							
526.blender_r	32	363	134	362	134	<u>363</u>	<u>134</u>							
527.cam4_r	32	368	152	370	151	<u>368</u>	<u>152</u>							
538.imagick_r	32	264	301	<u>264</u>	<u>301</u>	264	301							
544.nab_r	32	261	206	<u>258</u>	<u>209</u>	257	210							
549.fotonik3d_r	32	789	158	<u>790</u>	<u>158</u>	790	158							
554.roms_r	32	<u>529</u>	<u>96.2</u>	527	96.5	530	95.9							

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-31
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-fp/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Fan Control = Full

HWPM = Native Mode with no legacy

LLC Dead Line Alloc = Disabled

LLC Prefetcher = Disabled

Local/Remote Threshold = Disable

Patrol Scrub = Disabled

WR CRC feature Control = Disabled

XPT Prefetch = Disabled

Sysinfo program /home/Benchmark/speccpu2017-fp/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-z2gf Tue Jun 19 03:28:18 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz

4 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 1 2 4 13

physical 1: cores 4 8 9 13

physical 2: cores 1 2 5 13

physical 3: cores 1 2 5 13

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 4
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8256 CPU @ 3.80GHz
Stepping: 6
CPU MHz: 3800.000
CPU max MHz: 3900.0000
CPU min MHz: 1200.0000
BogoMIPS: 7600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0,1,16,17
NUMA node1 CPU(s): 2,3,18,19
NUMA node2 CPU(s): 4,7,20,23
NUMA node3 CPU(s): 5,6,21,22
NUMA node4 CPU(s): 8,9,24,25
NUMA node5 CPU(s): 10,11,26,27
NUMA node6 CPU(s): 12,13,28,29
NUMA node7 CPU(s): 14,15,30,31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 16 17
node 0 size: 191887 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

node 0 free: 188692 MB
node 1 cpus: 2 3 18 19
node 1 size: 193534 MB
node 1 free: 193419 MB
node 2 cpus: 4 7 20 23
node 2 size: 193534 MB
node 2 free: 193420 MB
node 3 cpus: 5 6 21 22
node 3 size: 193534 MB
node 3 free: 193417 MB
node 4 cpus: 8 9 24 25
node 4 size: 193505 MB
node 4 free: 193372 MB
node 5 cpus: 10 11 26 27
node 5 size: 193534 MB
node 5 free: 193288 MB
node 6 cpus: 12 13 28 29
node 6 size: 193534 MB
node 6 free: 193416 MB
node 7 cpus: 14 15 30 31
node 7 size: 193316 MB
node 7 free: 193204 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

```

From /proc/meminfo
MemTotal:      1583497852 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

CPE_NAME="cpe:/o:suse:sles:15"

uname -a:

```
Linux linux-z2gf 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

run-level 3 Jun 18 22:16

```
SPEC is set to: /home/Benchmark/speccpu2017-fp
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs 445G   35G 409G   8% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.8.0 for D3753-C1x
06/06/2019
```

Memory:

```
33x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934
15x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

```
=====  
C++ | 508.namd_r(base) 510.parest_r(base)  
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256,
3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jun-2018
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8256, 3.80GHz

SPECrate®2017_fp_base = 152

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2018

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2018-06-18 14:28:17-0400.

Report generated on 2019-10-01 14:31:20 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.