



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation


SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

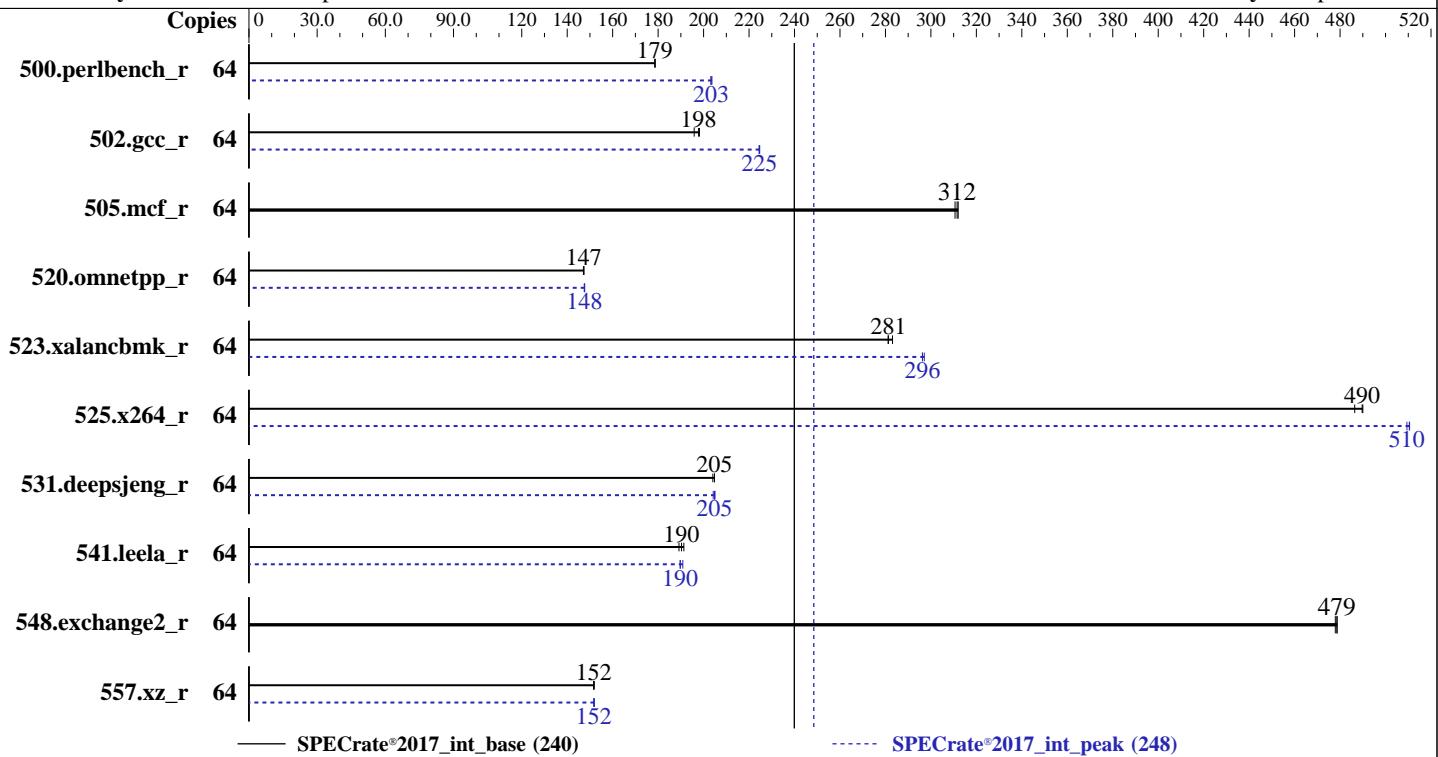

Hardware

CPU Name: Intel Xeon Gold 6246R
 Max MHz: 4100
 Nominal: 3400
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0
 Other: None

OS:

Red Hat Enterprise Linux Server release 7.7 (Maipo)

Kernel 3.10.0-1062.1.1.el7.x86_64

Compiler:

C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux

Parallel:

No

Firmware:

NEC BIOS Version U32 v2.32 03/09/2020 released Jun-2020

File System:

ext4

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

32/64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

CPU2017 License: 9006

Test Date: Nov-2020

Test Sponsor: NEC Corporation

Hardware Availability: May-2020

Tested by: NEC Corporation

Software Availability: Sep-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	570	179	571	179	570	179	64	501	203	500	204	501	203
502.gcc_r	64	457	198	463	196	458	198	64	403	225	404	224	403	225
505.mcf_r	64	332	312	331	312	333	311	64	332	312	331	312	333	311
520.omnetpp_r	64	570	147	570	147	571	147	64	569	148	568	148	569	148
523.xalancbmk_r	64	240	281	239	283	240	281	64	227	297	228	296	228	296
525.x264_r	64	229	490	230	486	229	490	64	220	510	220	509	219	511
531.deepsjeng_r	64	358	205	358	205	359	204	64	358	205	358	205	359	204
541.leela_r	64	557	190	554	191	560	189	64	559	190	559	190	555	191
548.exchange2_r	64	351	478	350	479	350	479	64	351	478	350	479	350	479
557.xz_r	64	456	152	456	152	455	152	64	456	152	455	152	455	152

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
    32"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

CPU2017 License: 9006

Test Date: Nov-2020

Test Sponsor: NEC Corporation

Hardware Availability: May-2020

Tested by: NEC Corporation

Software Availability: Sep-2019

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling

Workload Profile: General Throughput Compute

Memory Patrol Scrubbing: Disabled

LLC Dead Line Allocation: Disabled

LLC Prefetch: Enabled

Enhanced Processor Performance: Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on r120h1m Wed Nov 4 09:19:23 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
```

```
 2 "physical id"s (chips)
```

```
 64 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
  cpu cores : 16
```

```
  siblings : 32
```

```
  physical 0: cores 0 1 3 9 12 13 16 17 18 19 20 21 26 27 29
```

```
  physical 1: cores 0 2 3 10 12 13 16 17 18 19 20 21 26 27 29
```

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

Platform Notes (Continued)

CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
Stepping: 7
CPU MHz: 3400.000
BogoMIPS: 6800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-7,32-39
NUMA node1 CPU(s): 8-15,40-47
NUMA node2 CPU(s): 16-23,48-55
NUMA node3 CPU(s): 24-31,56-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_13 cdp_13 invpcid_single intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 97960 MB
node 0 free: 95513 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 98304 MB
node 1 free: 96035 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

CPU2017 License: 9006

Test Date: Nov-2020

Test Sponsor: NEC Corporation

Hardware Availability: May-2020

Tested by: NEC Corporation

Software Availability: Sep-2019

Platform Notes (Continued)

```
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
node 2 size: 98304 MB
node 2 free: 95981 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 98303 MB
node 3 free: 96018 MB
node distances:
node    0    1    2    3
  0: 10 21 21 21
  1: 21 10 21 21
  2: 21 21 10 21
  3: 21 21 21 10
```

From /proc/meminfo

```
MemTotal:      395918728 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.7 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.7"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

uname -a:

```
Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full retpoline, IBPB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

Platform Notes (Continued)

run-level 3 Nov 4 09:13

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	908G	234G	628G	28%	/

From /sys/devices/virtual/dmi/id

 BIOS: NEC U32 03/09/2020

 Vendor: NEC

 Product: Express5800/R120h-1M

 Serial: JPN0084094

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

 24x HPE P03050-091 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

SPECCrate®2017_int_base = 240

SPECCrate®2017_int_peak = 248

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 523.xalancbmk_r(peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
      | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 523.xalancbmk_r(peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
      | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=4 -fno-standard-realloc-lhs -falign array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

Test Date: Nov-2020

Hardware Availability: May-2020

Software Availability: Sep-2019

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

```
531.deepsjeng_r: Same as 520.omnetpp_r
```

```
541.leela_r: Same as 520.omnetpp_r
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6246R)

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 248

CPU2017 License: 9006

Test Date: Nov-2020

Test Sponsor: NEC Corporation

Hardware Availability: May-2020

Tested by: NEC Corporation

Software Availability: Sep-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-11-03 19:19:22-0500.

Report generated on 2020-11-25 10:30:09 by CPU2017 PDF formatter v6255.

Originally published on 2020-11-24.