



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

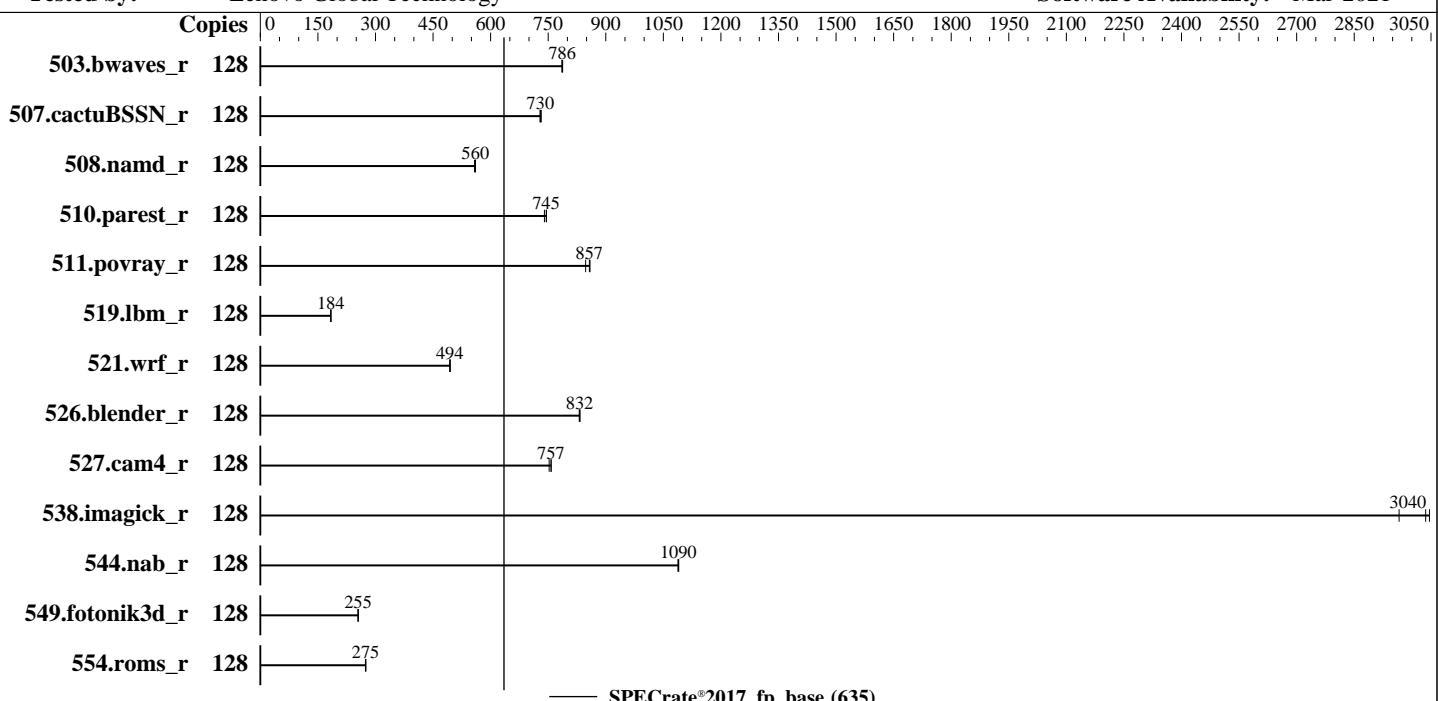

Hardware

CPU Name: AMD EPYC 7763
Max MHz: 3500
Nominal: 2450
Enabled: 128 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 8 cores
Other: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
Kernel 5.3.18-22-default
Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
Parallel: No
Firmware: Lenovo BIOS Version D8E115B 2.00 released Feb-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc: jemalloc memory allocator library v5.1.0
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1630	788	1633	786	1632	786							
507.cactusBSSN_r	128	222	730	222	729	221	732							
508.namd_r	128	217	561	218	558	217	560							
510.parest_r	128	450	745	449	746	452	740							
511.povray_r	128	353	848	349	857	348	859							
519.lbm_r	128	734	184	734	184	734	184							
521.wrf_r	128	580	495	581	494	580	494							
526.blender_r	128	234	833	234	832	235	831							
527.cam4_r	128	296	757	295	758	298	752							
538.imagick_r	128	105	3040	105	3050	107	2970							
544.nab_r	128	198	1090	198	1090	198	1090							
549.fotonik3d_r	128	1957	255	1957	255	1957	255							
554.roms_r	128	741	275	740	275	743	274							
SPECrate®2017_fp_base = 635														
SPECrate®2017_fp_peak = Not Run														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Operating System Notes (Continued)

and avoid remote memory usage.

```
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.  
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout  
randomization (ASLR) to reduce run-to-run variability.
```

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak  
integer runs and all FP runs to enable Transparent Hugepages (THP).  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base  
integer runs to enable THP only on request.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/6  
    4;/home/cpu2017-1.1.5-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/  
    32;"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

4-Link xGMI Max Speed set to 16Gbps

NUMA nodes per socket set to NPS4

ACPI SRAT L3 Cache as NUMA Domain set to Enable

L1 Stream HW Prefetcher set to Disable

L2 Stream HW Prefetcher set to Disable

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

Memory interleaving set to Disabled

SMT Mode set to Disable

```
Sysinfo program /home/cpu2017-1.1.5-amd-aocc300-milan-A1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost Sat Feb 27 17:07:26 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7763 64-Core Processor
  2 "physical id"s (chips)
  128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 64
  siblings   : 64
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:   1
Core(s) per socket:   64
Socket(s):             2
NUMA node(s):          16
Vendor ID:             AuthenticAMD
CPU family:            25
Model:                 1
Model name:            AMD EPYC 7763 64-Core Processor
Stepping:               1
CPU MHz:                1795.785
CPU max MHz:            2450.0000
CPU min MHz:            1500.0000
BogoMIPS:                4890.67
Virtualization:         AMD-V
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
NUMA node4 CPU(s): 32-39
NUMA node5 CPU(s): 40-47
NUMA node6 CPU(s): 48-55
NUMA node7 CPU(s): 56-63
NUMA node8 CPU(s): 64-71
NUMA node9 CPU(s): 72-79
NUMA node10 CPU(s): 80-87
NUMA node11 CPU(s): 88-95
NUMA node12 CPU(s): 96-103
NUMA node13 CPU(s): 104-111
NUMA node14 CPU(s): 112-119
NUMA node15 CPU(s): 120-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrandlahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmlload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 32066 MB
node 0 free: 31893 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 32251 MB
node 1 free: 31969 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 32253 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

```
node 2 free: 32145 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 32251 MB
node 3 free: 32145 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 32253 MB
node 4 free: 32148 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 32251 MB
node 5 free: 32139 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 32253 MB
node 6 free: 32152 MB
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 32239 MB
node 7 free: 32139 MB
node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 32253 MB
node 8 free: 32168 MB
node 9 cpus: 72 73 74 75 76 77 78 79
node 9 size: 32251 MB
node 9 free: 32164 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 32253 MB
node 10 free: 32162 MB
node 11 cpus: 88 89 90 91 92 93 94 95
node 11 size: 32251 MB
node 11 free: 32132 MB
node 12 cpus: 96 97 98 99 100 101 102 103
node 12 size: 32220 MB
node 12 free: 32097 MB
node 13 cpus: 104 105 106 107 108 109 110 111
node 13 size: 32251 MB
node 13 free: 32142 MB
node 14 cpus: 112 113 114 115 116 117 118 119
node 14 size: 32253 MB
node 14 free: 32168 MB
node 15 cpus: 120 121 122 123 124 125 126 127
node 15 size: 32251 MB
node 15 free: 32166 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 0: 10 11 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 1: 11 10 12 12 12 12 12 32 32 32 32 32 32 32 32 32
 2: 12 12 10 11 12 12 12 32 32 32 32 32 32 32 32 32
 3: 12 12 11 10 12 12 12 32 32 32 32 32 32 32 32 32
 4: 12 12 12 12 10 11 12 32 32 32 32 32 32 32 32 32
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

```

5: 12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32 32 32 32 32 32 32
8: 32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12 12 12 12 12 12 12
9: 32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12 12 12 12 12 12 12
11: 32 32 32 32 32 32 32 32 12 12 11 10 12 12 12 12 12 12 12 12 12 12
12: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 10 11 12 12 12 12 12 12
13: 32 32 32 32 32 32 32 32 12 12 12 12 12 11 10 12 12 12 12 12 12 12
14: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 10 11 12 10 11 11 11
15: 32 32 32 32 32 32 32 32 12 12 12 12 12 12 12 12 12 11 10 11 10 10

```

```

From /proc/meminfo
MemTotal:      528191784 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP2"
  VERSION_ID="15.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp2"

```

```

uname -a:
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeба) x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2):

Mitigation: Full AMD retrpoline,
IBPB: conditional, IBRS_FW, STIBP:
disabled, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Feb 27 17:04

SPEC is set to: /home/cpu2017-1.1.5-amd-aocc300-milan-A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	889G	97G	792G	11%	/

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR645 MB
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE	32 GB	2 rank	3200
16x Unknown	Unknown		

BIOS:

BIOS Vendor:	Lenovo
BIOS Version:	D8E115B-2.00
BIOS Date:	02/02/2021
BIOS Revision:	2.0
Firmware Revision:	3.0

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Compiler Version Notes (Continued)

=====

C++ | 508.namd_r(base) 510.parest_r(base)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

=====

C++, C, Fortran | 507.cactusBSSN_r(base)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on

LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-lcim-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fno
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-x86-prefetching
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-femap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -fno-rtti
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fvec/lib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-lcmm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-v1.2-Milan-C.html>
<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645
2.45 GHz, AMD EPYC 7763

SPECrate®2017_fp_base = 635

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2021

Tested by: Lenovo Global Technology

Software Availability: Mar-2021

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Milan-C.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-27 04:07:26-0500.

Report generated on 2021-03-16 15:30:50 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.