



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3


Test Date: Apr-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Mar-2021

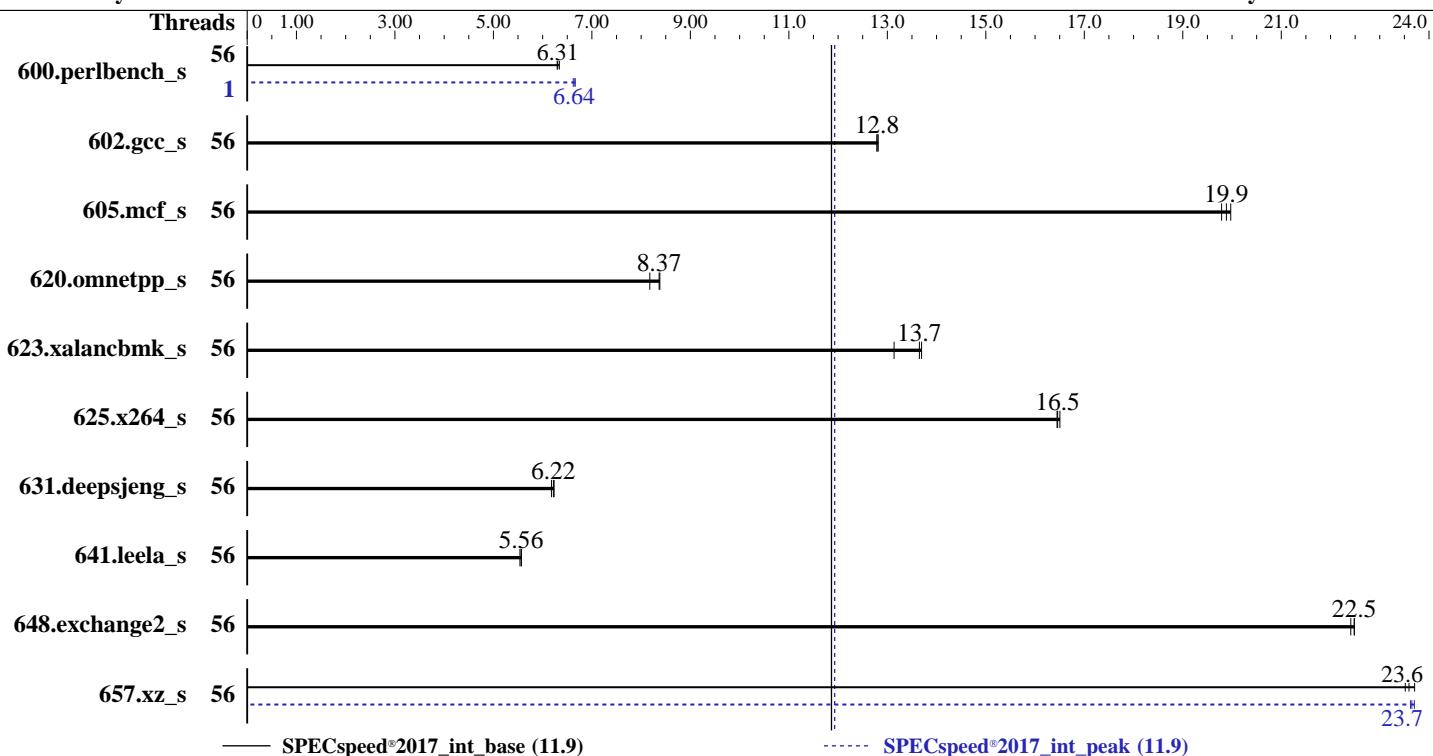

Hardware

CPU Name: AMD EPYC 7663
Max MHz: 3500
Nominal: 2000
Enabled: 56 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 7 cores
Other: None
Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
Storage: 1 x 800 GB SAS SSD, RAID 0
Other: None

Software

OS: Ubuntu 20.04.1 LTS (x86_64)
Compiler: Kernel 5.4.0-54-generic
Parallel: C/C++/Fortran: Version 3.0.0 of AOCC
Firmware: Yes
File System: HPE BIOS Version A43 v2.40 02/15/2021 released Mar-2021
System State: ext4
Base Pointers: Run level 5 (multi-user, GUI disabled)
Peak Pointers: 64-bit
Other: 64-bit
Power Management: jemalloc: jemalloc memory allocator library v5.1.0
BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Date: Apr-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Mar-2021

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	56	280	6.34	282	6.30	281	6.31	1	266	6.66	267	6.64	268	6.62		
602.gcc_s	56	311	12.8	311	12.8	311	12.8	56	311	12.8	311	12.8	311	12.8		
605.mcf_s	56	237	19.9	239	19.8	236	20.0	56	237	19.9	239	19.8	236	20.0		
620.omnetpp_s	56	195	8.37	195	8.38	199	8.18	56	195	8.37	195	8.38	199	8.18		
623.xalancbmk_s	56	104	13.7	108	13.1	103	13.7	56	104	13.7	108	13.1	103	13.7		
625.x264_s	56	107	16.5	107	16.4	107	16.5	56	107	16.5	107	16.4	107	16.5		
631.deepsjeng_s	56	232	6.18	230	6.23	230	6.22	56	232	6.18	230	6.23	230	6.22		
641.leela_s	56	306	5.57	307	5.56	308	5.54	56	306	5.57	307	5.56	308	5.54		
648.exchange2_s	56	131	22.5	131	22.5	131	22.4	56	131	22.5	131	22.5	131	22.4		
657.xz_s	56	263	23.5	262	23.6	261	23.7	56	261	23.7	261	23.7	262	23.6		

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'unlimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
```

The real test date is Apr-2021. The clock was mistakenly set to 2020 before the benchmark was run.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-55"
LD_LIBRARY_PATH =
 "/cpu2017/amd_speed_aocc300_milan_B_lib/64;/cpu2017/amd_speed_aocc300_mi
 lan_B_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "56"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-55"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute
AMD SMT Option set to Disabled
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled
Memory PStates set to Disabled
Data Fabric C-State Enable set to Force Enabled
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
Infinity Fabric Power Management set to Disabled
Infinity Fabric Performance State set to P0
L1 HW Prefetcher set to Disabled

```
Sysinfo program /cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on dl325gen10plus Wed Apr 1 17:28:25 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7663 56-Core Processor
  1 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 56
  siblings : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
  28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
  60 61 62
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
Address sizes:        48 bits physical, 48 bits virtual
CPU(s):               56
On-line CPU(s) list:  0-55
Thread(s) per core:   1
Core(s) per socket:   56
Socket(s):            1
NUMA node(s):         8
Vendor ID:            AuthenticAMD
CPU family:           25
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Date: Apr-2021

Test Sponsor: HPE

Hardware Availability: Jun-2021

Tested by: HPE

Software Availability: Mar-2021

Platform Notes (Continued)

Model:	1
Model name:	AMD EPYC 7663 56-Core Processor
Stepping:	1
Frequency boost:	enabled
CPU MHz:	3282.026
CPU max MHz:	2000.0000
CPU min MHz:	1500.0000
BogoMIPS:	3992.34
Virtualization:	AMD-V
L1d cache:	1.8 MiB
L1i cache:	1.8 MiB
L2 cache:	28 MiB
L3 cache:	256 MiB
NUMA node0 CPU(s):	0-6
NUMA node1 CPU(s):	7-13
NUMA node2 CPU(s):	14-20
NUMA node3 CPU(s):	21-27
NUMA node4 CPU(s):	28-34
NUMA node5 CPU(s):	35-41
NUMA node6 CPU(s):	42-48
NUMA node7 CPU(s):	49-55
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retrpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsqsbbase bmi1 avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6
node 0 size: 128775 MB
node 0 free: 128577 MB
node 1 cpus: 7 8 9 10 11 12 13
node 1 size: 129022 MB
node 1 free: 128880 MB
node 2 cpus: 14 15 16 17 18 19 20
node 2 size: 129022 MB
node 2 free: 128890 MB
node 3 cpus: 21 22 23 24 25 26 27
node 3 size: 129022 MB
node 3 free: 128898 MB
node 4 cpus: 28 29 30 31 32 33 34
node 4 size: 129022 MB
node 4 free: 128817 MB
node 5 cpus: 35 36 37 38 39 40 41
node 5 size: 129022 MB
node 5 free: 128865 MB
node 6 cpus: 42 43 44 45 46 47 48
node 6 size: 129022 MB
node 6 free: 128885 MB
node 7 cpus: 49 50 51 52 53 54 55
node 7 size: 116884 MB
node 7 free: 116424 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 11 11 11 11 11 11
  1: 11 10 11 11 11 11 11 11
  2: 11 11 10 11 11 11 11 11
  3: 11 11 11 10 11 11 11 11
  4: 11 11 11 11 10 11 11 11
  5: 11 11 11 11 11 10 11 11
  6: 11 11 11 11 11 11 10 11
  7: 11 11 11 11 11 11 11 10
```

From /proc/meminfo

```
MemTotal:      1044269028 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```
/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.1 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.1 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

```
uname -a:
Linux dl325gen10plus 5.4.0-54-generic #60-Ubuntu SMP Fri Nov 6 10:37:59 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Apr 1 17:23

```
SPEC is set to: /cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2        ext4  733G  23G  672G   4%  /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL325 Gen10 Plus
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

Product Family: ProLiant
Serial: CN79290FKQ

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200
8x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor: HPE
BIOS Version: A43
BIOS Date: 02/15/2021
BIOS Revision: 2.40
Firmware Revision: 2.40

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
| 625.x264_s(base, peak) 657.xz_s(base, peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====

=====

Fortran | 648.exchange2_s(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIB -ffast-math -fsto -fstruct-layout=5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIB -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIB -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Other Flags (Continued)

Fortran benchmarks:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fsto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc_s: basepeak = yes

605.mcf_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen10 Plus v2
(2.00 GHz, AMD EPYC 7663)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

625.x264_s: basepeak = yes

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aoxx300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aoxx300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 13:28:25-0400.

Report generated on 2021-05-12 13:42:05 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.