



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 290

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Sep-2021

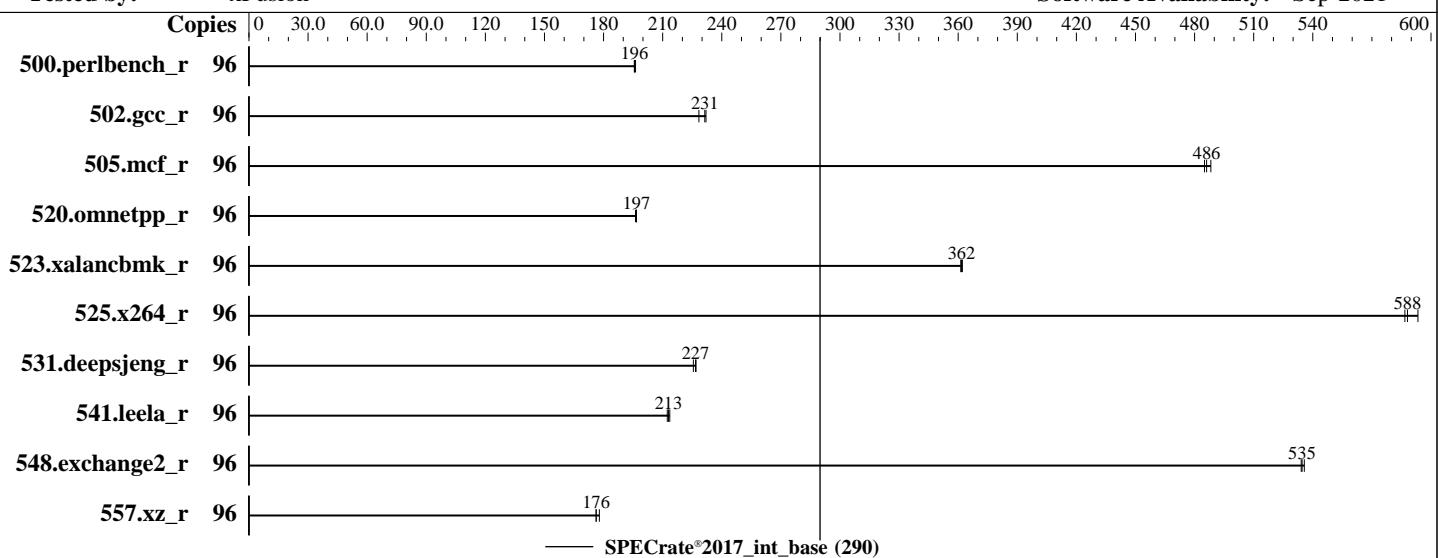

Hardware

CPU Name: Intel Xeon Platinum 8260
 Max MHz: 3900
 Nominal: 2400
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86_64
 Compiler: C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++ Compiler Build 20210924 for Linux;
 Fortran: Version 2021.4.0 of Intel Fortran Compiler Classic Build 20210910 for Linux
 Parallel: No
 Firmware: Version 8.23 Released Dec-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 290

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Sep-2021

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	781	196	779	196	781	196									
502.gcc_r	96	586	232	595	228	587	231									
505.mcf_r	96	320	485	318	488	319	486									
520.omnetpp_r	96	642	196	640	197	640	197									
523.xalancbmk_r	96	280	362	280	362	281	361									
525.x264_r	96	286	587	283	593	286	588									
531.deepsjeng_r	96	488	226	485	227	485	227									
541.leela_r	96	749	212	747	213	744	214									
548.exchange2_r	96	471	534	471	535	470	536									
557.xz_r	96	588	176	588	176	583	178									

SPECrate®2017_int_base = 290

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/spec2017/lib/intel64:/spec2017/lib/ia32:/spec2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 290

xFusion 2288H V5 (Intel Xeon Platinum 8260)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Sep-2021

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving set to 1-way interleave

XPT Prefetch set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on localhost.localdomain Fri Apr 22 19:32:28 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
  2 "physical id"s (chips)
  96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings : 48
  physical 0: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Platinum 8260)

SPECrate®2017_int_base = 290

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Sep-2021

Platform Notes (Continued)

BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
BIOS Model name: Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
Stepping: 7
CPU MHz: 3099.998
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7,8,12-14,18-20,48-51,55,56,60-62,66-68
NUMA node1 CPU(s): 4-6,9-11,15-17,21-23,52-54,57-59,63-65,69-71
NUMA node2 CPU(s): 24-27,31-33,37-39,43,44,72-75,79-81,85-87,91,92
NUMA node3 CPU(s): 28-30,34-36,40-42,45-47,76-78,82-84,88-90,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xttopology nonstop_tsc cpuid aperfmpf perf_pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbmm_total cqmq_mbmm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 12 13 14 18 19 20 48 49 50 51 55 56 60 61 62 66 67 68
node 0 size: 191708 MB
node 0 free: 185504 MB
node 1 cpus: 4 5 6 9 10 11 15 16 17 21 22 23 52 53 54 57 58 59 63 64 65 69 70 71
node 1 size: 193530 MB
node 1 free: 193183 MB
node 2 cpus: 24 25 26 27 31 32 33 37 38 39 43 44 72 73 74 75 79 80 81 85 86 87 91 92
node 2 size: 193493 MB
node 2 free: 193031 MB
node 3 cpus: 28 29 30 34 35 36 40 41 42 45 46 47 76 77 78 82 83 84 88 89 90 93 94 95

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Platinum 8260)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 290

SPECrate®2017_int_peak = Not Run

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Sep-2021

Platform Notes (Continued)

```
node 3 size: 193530 MB
node 3 free: 192104 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10

From /proc/meminfo
MemTotal: 790796736 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):
CVE-2018-3620 (L1 Terminal Fault):
Microarchitectural Data Sampling:
CVE-2017-5754 (Meltdown):
CVE-2018-3639 (Speculative Store Bypass):

KVM: Mitigation: Split huge pages
Not affected
Not affected
Not affected
Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Platinum 8260)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 290

SPECrate®2017_int_peak = Not Run

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Sep-2021

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Mitigation: TSX disabled

run-level 3 Apr 22 19:31

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	859G	30G	830G	4%	/

From /sys/devices/virtual/dmi/id

Vendor:	XFUSION
Product:	5288 V5
Product Family:	Purley
Serial:	Serial

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

22x Hynix HMA84GR7CJR4N-WM	32 GB	2 rank	2933
2x Hynix HMA84GR7JJR4N-WM	32 GB	2 rank	2933

BIOS:

BIOS Vendor:	INSYDE Corp.
BIOS Version:	8.23
BIOS Date:	12/30/2021
BIOS Revision:	8.23

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2288H V5 (Intel Xeon Platinum 8260)

SPECrate®2017_int_base = 290

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Sep-2021

Compiler Version Notes (Continued)

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 290

xFusion 2288H V5 (Intel Xeon Platinum 8260)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Sep-2021

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-22 19:32:27-0400.

Report generated on 2022-05-25 13:10:40 by CPU2017 PDF formatter v6442.

Originally published on 2022-05-24.