



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_base = 608

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

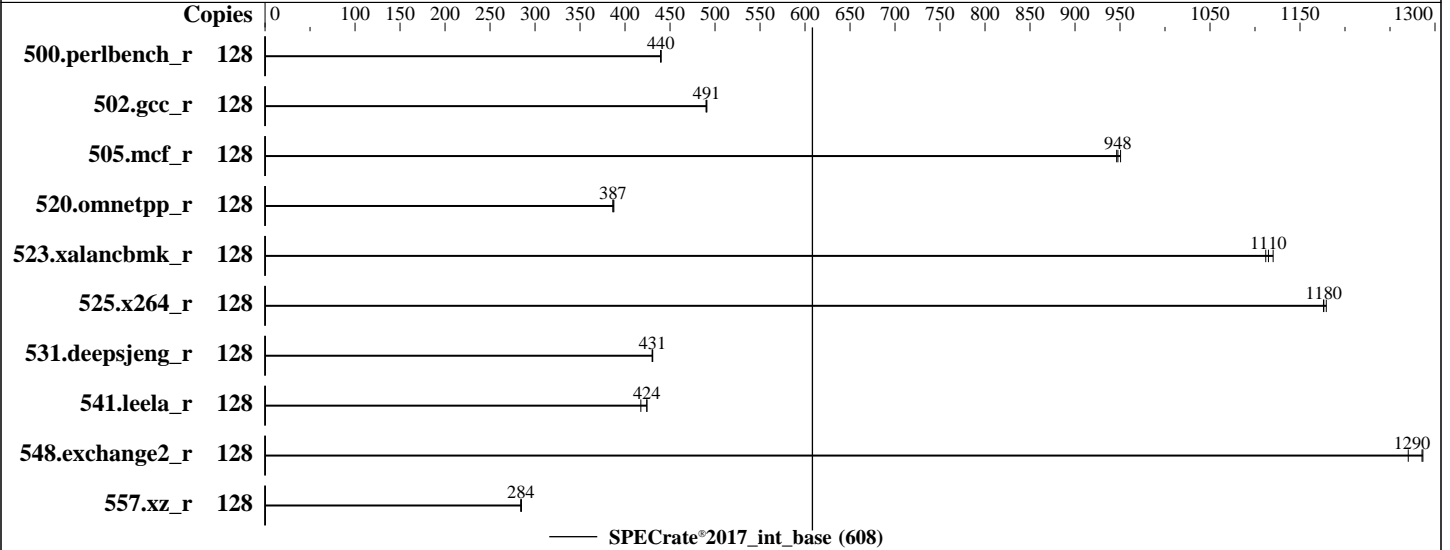

### Hardware

CPU Name: Intel Xeon Gold 6448H  
 Max MHz: 4100  
 Nominal: 2400  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 960GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version USE113Y 2.10 released Mar-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_base = 608

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Apr-2023  
Hardware Availability: May-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	464	440	463	440	<b>463</b>	<b>440</b>							
502.gcc_r	128	<b>369</b>	<b>491</b>	370	490	369	491							
505.mcf_r	128	219	946	218	951	<b>218</b>	<b>948</b>							
520.omnetpp_r	128	433	388	434	387	<b>434</b>	<b>387</b>							
523.xalancbmk_r	128	<b>121</b>	<b>1110</b>	121	1120	122	1110							
525.x264_r	128	190	1180	<b>191</b>	<b>1180</b>	191	1180							
531.deepsjeng_r	128	341	430	341	431	<b>341</b>	<b>431</b>							
541.leela_r	128	500	424	<b>500</b>	<b>424</b>	508	418							
548.exchange2_r	128	261	1290	<b>261</b>	<b>1290</b>	264	1270							
557.xz_r	128	486	284	485	285	<b>486</b>	<b>284</b>							

SPECrate®2017\_int\_base = 608

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/lib/ia32:/home/cpu2017-1.1.9-ic2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 608

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC2

LLC Prefetch set to Disabled

UPI Link Disable set to Disabled 1 Link

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Apr 5 09:09:15 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 608

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

```

2. w
  09:09:15 up 3 min,  2 users,  load average: 0.69, 2.26, 1.17
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -                09:06   11.00s 0.82s  0.00s  -bash
root  pts/0   172.28.1.99      09:07    1:47  0.01s  0.01s  -bash

```

```

3. Username
  From environment variable $USER:  root

```

```

4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size          (kbytes, -d) unlimited
  scheduling priority     (-e) 0
  file size               (blocks, -f) unlimited
  pending signals        (-i) 2062497
  max locked memory      (kbytes, -l) 64
  max memory size        (kbytes, -m) unlimited
  open files             (-n) 1024
  pipe size              (512 bytes, -p) 8
  POSIX message queues   (bytes, -q) 819200
  real-time priority     (-r) 0
  stack size             (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes     (-u) 2062497
  virtual memory         (kbytes, -v) unlimited
  file locks            (-x) unlimited

```

```

5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 30
  login -- root
  -bash
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.356/templogs/preenv.intrate.356.0.log --lognum 356.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
  $SPEC = /home/cpu2017-1.1.9-ic2023.0

```

```

6. /proc/cpuinfo
  model name      : Intel(R) Xeon(R) Gold 6448H
  vendor_id      : GenuineIntel
  cpu family     : 6
  model          : 143
  stepping       : 8
  microcode      : 0x2b000190
  bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 608

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
cpu cores      : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Gold 6448H
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
Stepping:              8
BogoMIPS:              4800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):     0-15,64-79
NUMA node1 CPU(s):     16-31,80-95
NUMA node2 CPU(s):     32-47,96-111
NUMA node3 CPU(s):     48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_base = 608

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Vulnerability Meltdown: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 128681 MB
node 0 free: 128011 MB
node 1 cpus: 16-31,80-95
node 1 size: 129015 MB
node 1 free: 128567 MB
node 2 cpus: 32-47,96-111
node 2 size: 128981 MB
node 2 free: 128584 MB
node 3 cpus: 48-63,112-127
node 3 size: 128969 MB
node 3 free: 128263 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 528023764 kB

10. who -r

run-level 3 Apr 5 09:06

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_base = 608

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023

**Hardware Availability:** May-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

indirect
lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=17904382-c2c1-4de4-88b3-dda5a45ba9e5
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_base = 608

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP4

-----  
19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 894G 65G 829G 8% /

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem ST650 V3 MAIN BOARD  
Product Family: ThinkSystem  
Serial: MDSN00110D

-----  
21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: USE113Y-2.10  
BIOS Date: 03/26/2023  
BIOS Revision: 2.10  
Firmware Revision: 2.10

### Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_int\_base = 608

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin

-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin

-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_int\_base = 608

ThinkSystem ST650 V3  
(2.40 GHz, Intel Xeon Gold 6448H)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2023

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** May-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-P.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-P.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-04 21:09:15-0400.

Report generated on 2024-01-29 17:40:36 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.