



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 118

### PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573


Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

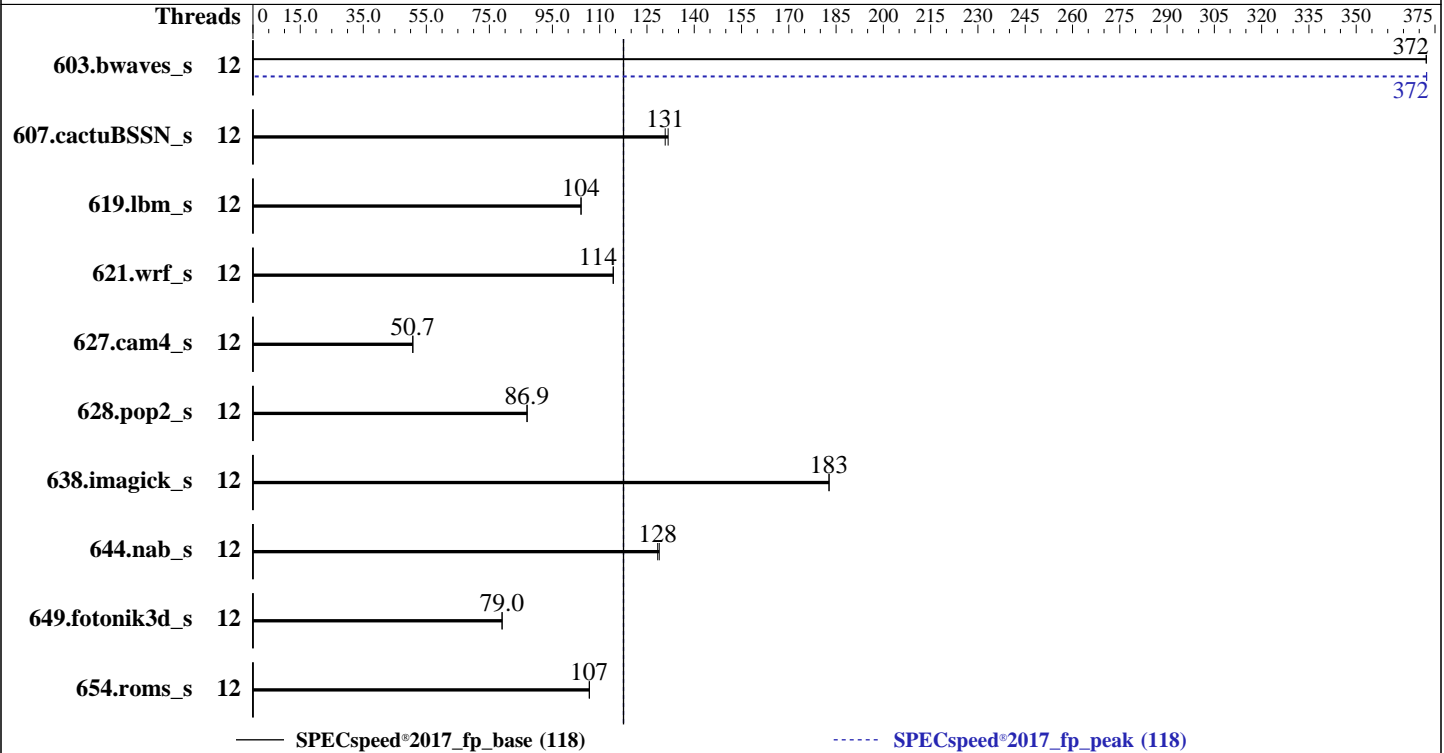

### Hardware

CPU Name: Intel Xeon Silver 4410Y  
 Max MHz: 3900  
 Nominal: 2000  
 Enabled: 12 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R, running at 4000)  
 Storage: 40 GB on tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 1.1.0 released Apr-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECSpeed®2017\_fp\_peak = 118

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Apr-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	12	158	372	<u>159</u>	<u>372</u>			12	158	372	<u>158</u>	<u>372</u>		
607.cactuBSSN_s	12	127	132	<u>127</u>	<u>131</u>			12	127	132	<u>127</u>	<u>131</u>		
619.lbm_s	12	<u>50.3</u>	<u>104</u>	50.3	104			12	<u>50.3</u>	<u>104</u>	50.3	104		
621.wrf_s	12	116	114	<u>116</u>	<u>114</u>			12	116	114	<u>116</u>	<u>114</u>		
627.cam4_s	12	<u>175</u>	<u>50.7</u>	175	50.8			12	<u>175</u>	<u>50.7</u>	175	50.8		
628.pop2_s	12	136	87.0	<u>137</u>	<u>86.9</u>			12	136	87.0	<u>137</u>	<u>86.9</u>		
638.imagick_s	12	<u>78.9</u>	<u>183</u>	78.9	183			12	<u>78.9</u>	<u>183</u>	78.9	183		
644.nab_s	12	<u>136</u>	<u>128</u>	136	129			12	<u>136</u>	<u>128</u>	136	129		
649.fotonik3d_s	12	115	79.1	<u>115</u>	<u>79.0</u>			12	115	79.1	<u>115</u>	<u>79.0</u>		
654.roms_s	12	<u>148</u>	<u>107</u>	147	107			12	<u>148</u>	<u>107</u>	147	107		

SPECSpeed®2017\_fp\_base = 118

SPECSpeed®2017\_fp\_peak = 118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes

### BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
Uncorrectable Memory Error : Disabled
      Logical Processor : Disabled
      Virtualization Technology : Disabled
      Optimizer Mode : Enabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
          C1E : Disabled
          C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled

```

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun May 7 10:00:12 2023

```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- ```

-----
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

-----

2. w
 10:00:12 up  2:28,  1 user,  load average: 2.47, 4.50, 3.15
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Apr-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

```
root      tty1      -                07:32      2:27m  1.34s  0.00s /bin/bash ./dell-run-speccpu.sh speed
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
```

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2059732
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2059732
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd linux --switched-root --system --deserialize 34
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=12 --tune base,peak -o all --define
drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define
DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=12 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --output_format csv,html,pdf,txt --nopower --runmode
speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Silver 4410Y
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 8
microcode      : 0x2b000461
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573

Test Date: May-2023

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

## Platform Notes (Continued)

```

bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores      : 12
siblings       : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-11
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 12
On-line CPU(s) list:   0-11
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Silver 4410Y
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    12
Socket(s):              1
Stepping:               8
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities

L1d cache:             576 KiB (12 instances)
L1i cache:             384 KiB (12 instances)
L2 cache:              24 MiB (12 instances)
L3 cache:              30 MiB (1 instance)
NUMA node(s):          1
NUMA node0 CPU(s):    0-11
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swappg barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Apr-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 576K     | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 384K     | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 2M       | 24M      | 16   | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 30M      | 30M      | 15   | Unified     | 3     | 32768 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-11
node 0 size: 514956 MB
node 0 free: 505559 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 527315860 kB
```

10. who -r

```
run-level 3 May 7 07:32
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@<br>haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd<br>nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wickd<br>wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny                                                                                                                                                                                                                        |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| disabled        | autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait<br>chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm<br>grub2-once haveged-switch-root ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask<br>man-db-create multipathd nfs nfs-blkmap nvme-autoconnect rdisc rpcbind rpmconfigcheck<br>rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures<br>systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd<br>wickedd |
| indirect        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9a0bf598-0ccb-4e38-80ef-d4b5b6b0dc3f
linux
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=274M,high
crashkernel=72M,low
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

### 14. cpupower frequency-info

```

analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

### 15. sysctl

```

kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

### 16. /sys/kernel/mm/transparent\_hugepage

```

defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

### 18. OS release

```

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

### 19. Disk information

```

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 40G  4.2G  36G  11% /mnt/ramdisk

```

### 20. /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2023  
Hardware Availability: Apr-2023  
Software Availability: Dec-2022

## Platform Notes (Continued)

Vendor: Dell Inc.  
Product: PowerEdge XR5610  
Product Family: PowerEdge  
Serial: PT06013

### 21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

8x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800, configured at 4000

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.1.0  
BIOS Date: 04/21/2023  
BIOS Revision: 1.1

## Compiler Version Notes

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 118

PowerEdge XR5610 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 118

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Peak Optimization Flags (Continued)

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-07 10:00:12-0400.

Report generated on 2023-05-23 19:13:45 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.