



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

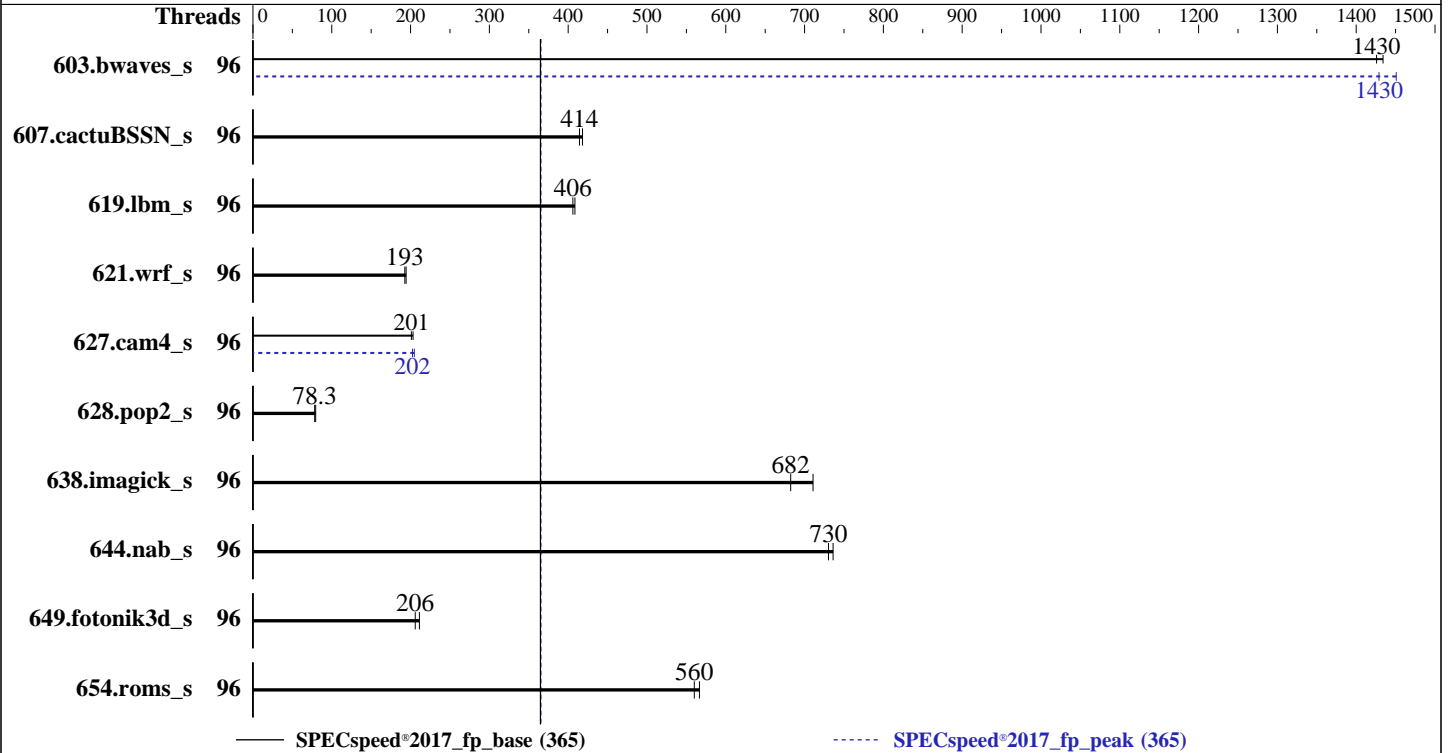

Hardware

CPU Name: Intel Xeon Gold 6418H
 Max MHz: 4000
 Nominal: 2100
 Enabled: 96 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 70 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: Yes
 Firmware: Version 1.4.0 released Mar-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECSpeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	41.4	1430	41.1	1430			96	40.7	1450	41.3	1430		
607.cactuBSSN_s	96	40.2	414	39.9	418			96	40.2	414	39.9	418		
619.lbm_s	96	12.8	409	12.9	406			96	12.8	409	12.9	406		
621.wrf_s	96	68.6	193	68.1	194			96	68.6	193	68.1	194		
627.cam4_s	96	44.1	201	43.6	203			96	43.3	205	43.8	202		
628.pop2_s	96	149	79.6	152	78.3			96	149	79.6	152	78.3		
638.imagick_s	96	21.1	682	20.3	711			96	21.1	682	20.3	711		
644.nab_s	96	23.9	730	23.7	736			96	23.9	730	23.7	736		
649.fotonik3d_s	96	44.3	206	43.2	211			96	44.3	206	43.2	211		
654.roms_s	96	27.8	567	28.1	560			96	27.8	567	28.1	560		

SPECSpeed®2017_fp_base = **365**

SPECSpeed®2017_fp_peak = **365**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes

BIOS settings:

ADDC Setting : Disabled
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
Logical Processor : Disabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
CIE : Disabled
C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
PCI ASPM L1 Link
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Mar 31 00:55:47 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
00:55:47 up 2:10, 1 user, load average: 5.55, 5.06, 3.10
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root :1 22:45 ?xdm? 2:43 0.00s /usr/libexec/gdm-x-session --register-session --run-script

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

gnome-session

3. Username

From environment variable \$USER: root

4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8254823
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8254823
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=96 --tune base,peak -o all --define
drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define
DL-BIOS-adddcD=1 --output_format csv,html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=96 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --output_format csv,html,pdf,txt --nopower --runmode speed --tune base:peak
--size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 6418H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b0001b0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

bugs          : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores     : 24
siblings      : 24
4 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 2: core ids 0-23
physical id 3: core ids 0-23
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel
Model name:            Intel(R) Xeon(R) Gold 6418H
BIOS Model name:      Intel(R) Xeon(R) Gold 6418H
CPU family:            6
Model:                 143
Thread(s) per core:   1
Core(s) per socket:   24
Socket(s):             4
Stepping:              7
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:            4.5 MiB (96 instances)
L1i cache:            3 MiB (96 instances)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

L2 cache: 192 MiB (96 instances)
L3 cache: 240 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	60M	240M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
node 0 size: 515543 MB
node 0 free: 514375 MB
node 1 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
node 1 size: 516090 MB
node 1 free: 503029 MB
node 2 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
node 2 size: 516090 MB
node 2 free: 515316 MB
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
node 3 size: 516043 MB
node 3 free: 515592 MB
node distances:
node 0 1 2 3
0: 10 21 21 21
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10

```

9. /proc/meminfo

MemTotal: 2113297928 kB

10. who -r

run-level 5 Mar 30 22:45

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```

Default Target Status
graphical running

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon gemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd virtqemud vmtoolsd
enabled-runtime	systemd-remount-fs
disabled	arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower cups-browsed dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy httpd httpd@ ibacm iprdump iprprint iprupdate ipsec iscsid iscsiui0 kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap nfs-server nftables nmb numad nvme-autoconnect pmfind pmie_farm pmlogger_farm pmproxy podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached sasauthd serial-getty@ smb snmpd snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysexct target targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtwfilterd virtproxyd virtsecret d virtstoraged vsftpd wpa_supplicant
indirect	pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd virtlogd vsftpd@

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

14. cpupower frequency-info

```

analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

```

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 70G  4.2G  66G   6% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R960
Product Family: PowerEdge

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 2x 00AD00B300AD HMC94MEBRA121N 64 GB 2 rank 4800
30x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Version: 1.4.0
BIOS Date: 03/15/2023
BIOS Revision: 1.4

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 365

PowerEdge R960 (Intel Xeon Gold 6418H)

SPECspeed®2017_fp_peak = 365

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-30 12:55:47-0400.

Report generated on 2023-09-13 20:34:38 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.