



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176


Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

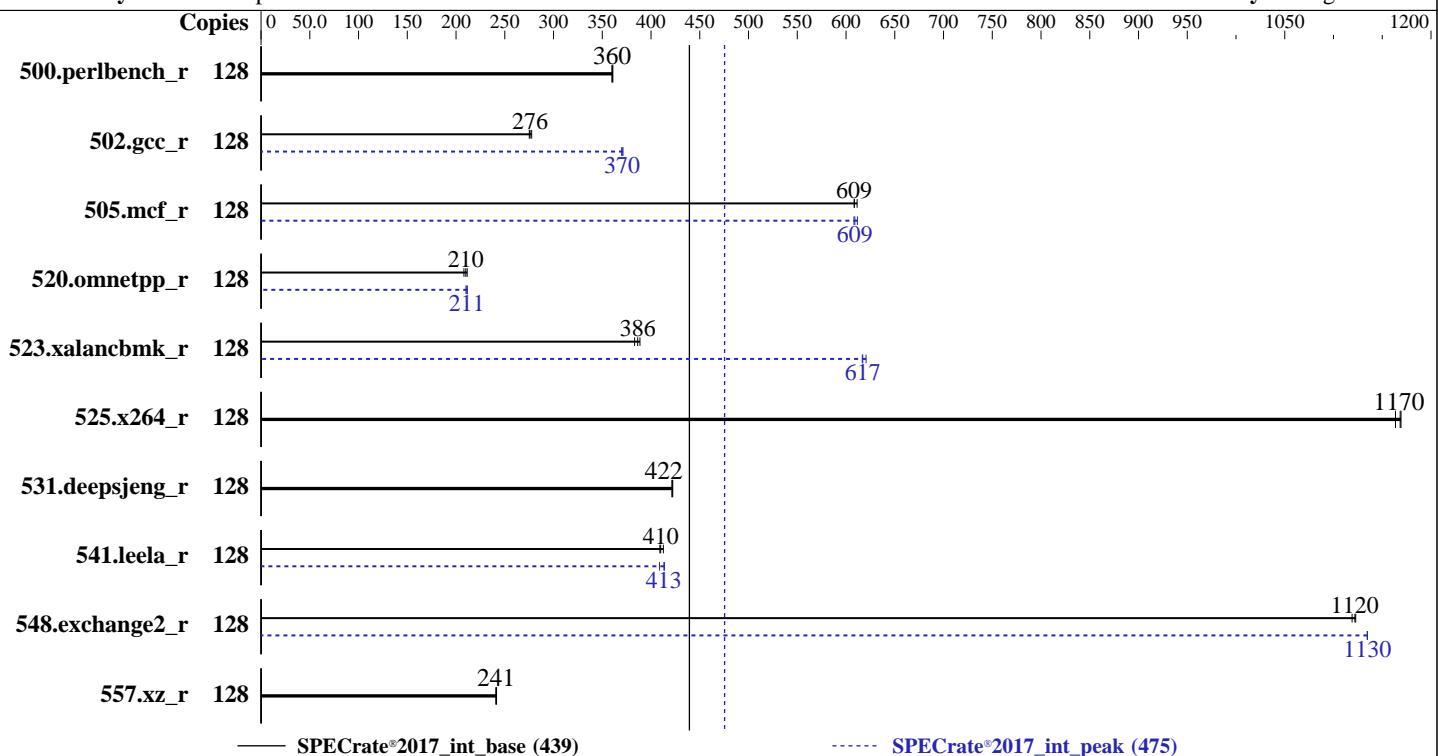

Hardware

CPU Name: AMD EPYC 8534PN
 Max MHz: 3100
 Nominal: 2000
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB shared / 8 cores
 Other: None
 Memory: 384 GB (6 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 4 TB NVMe SSD
 Other: None

Software

OS: Ubuntu 22.04.3 LTS
 Compiler: Kernel 5.15.0-79-generic
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
 Firmware: No
 File System: Version 1.0 released Aug-2023
 System State: ext4
 Base Pointers: Run level 5 (multi-user)
 Peak Pointers: 64-bit
 Other: 32/64-bit
 Power Management: None
 BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	565	361	566	360	566	360	128	565	361	566	360	566	360		
502.gcc_r	128	653	278	657	276	659	275	128	488	371	490	370	489	370		
505.mcf_r	128	338	611	340	608	340	609	128	338	612	340	609	340	608		
520.omnetpp_r	128	807	208	794	211	800	210	128	799	210	794	212	795	211		
523.xalancbmk_r	128	353	383	348	389	350	386	128	219	617	218	621	219	617		
525.x264_r	128	192	1170	193	1160	192	1170	128	192	1170	193	1160	192	1170		
531.deepsjeng_r	128	348	422	348	422	347	422	128	348	422	348	422	347	422		
541.leela_r	128	518	409	514	413	517	410	128	519	409	512	414	513	413		
548.exchange2_r	128	300	1120	299	1120	299	1120	128	296	1130	296	1130	296	1130		
557.xz_r	128	572	242	574	241	573	241	128	572	242	574	241	573	241		

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECCrate®2017_int_base = 439

SPECCrate®2017_int_peak = 475

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Aug-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/root/cpu2017znver4A1.1/amd_rate_aocc400_znver4_A_lib/lib:/root/cpu2017znver4A1.1/amd_rate_aocc400_zn
     ver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Determinism Control = Manual

Determinism Enable = Disable Performance Determinism

TSME = Disabled

SEV Control = Disabled

```
Sysinfo program /root/cpu2017znver4A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on smcsienacpu2017 Thu Aug 24 23:42:51 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

Platform Notes (Continued)

```
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
-----  
1. uname -a  
Linux smcsienacpu2017 5.15.0-79-generic #86-Ubuntu SMP Mon Jul 10 16:07:21 UTC 2023 x86_64 x86_64 x86_64  
GNU/Linux
```

```
-----  
2. w  
23:42:51 up 15 min, 2 users, load average: 0.08, 0.07, 0.15  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 23:38 4:09 0.07s 0.01s -bash  
root pts/1 10.217.3.54:S.0 23:40 9.00s 1.17s 0.05s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 1545516  
nofiles 1024  
vmmemory(kbytes) unlimited  
locks unlimited  
rtprio 0
```

```
-----  
5. sysinfo process ancestry  
/sbin/init  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root@pts/0  
-bash  
screen -S cpu  
SCREEN -S cpu  
/bin/bash  
python3 ./run_amd_rate_aocc400_znver4_A1.py  
/bin/bash ./amd_rate_aocc400_znver4_A1.sh  
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate  
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.006/templogs/preenv.intrate.006.0.log --lognum 006.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /root/cpu2017znver4A1.1
```

```
-----  
6. /proc/cpuinfo  
model name : AMD EPYC 8534PN 64-Core Processor  
vendor_id : AuthenticAMD  
cpu family : 25
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Aug-2023

Platform Notes (Continued)

```
model          : 160
stepping       : 2
microcode      : 0xaa0020f
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 64
siblings        : 128
1 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 0: apicids 0-127
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 8534PN 64-Core Processor
CPU family:            25
Model:                 160
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):             1
Stepping:              2
Frequency boost:      enabled
CPU max MHz:          3109.3750
CPU min MHz:          1500.0000
BogoMIPS:              3994.11
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
                      pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                      abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                      perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
                      invpcid_single hw_pstate ssbd mba ibrs ibpb stib vmmcall fsgsbase bmi1
                      avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                      xsavenc xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
                      avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
                      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                      pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vmbi
                      umip pkru ospke avx512_vbm12 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V
Virtualization:
L1d cache:        2 MiB (64 instances)
L1i cache:        2 MiB (64 instances)
L2 cache:        64 MiB (64 instances)
L3 cache:        128 MiB (8 instances)
NUMA node(s):     1
NUMA node0 CPU(s): 0-127
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

Platform Notes (Continued)

Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available:	1 nodes (0)
node 0 cpus:	0-127
node 0 size:	386493 MB
node 0 free:	384872 MB
node distances:	
node 0	
0:	10

9. /proc/meminfo

MemTotal:	395769348 kB
-----------	--------------

10. who -r
run-level 5 Aug 24 23:29

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)

Default Target	Status
graphical	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* systemd-networkd-wait-online.service	loaded	failed	failed	Wait for Network to be Configured

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent multipathd networkd-dispatcher nvmefc-boot-connections nvmf-autoconnect open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgaauth
enabled-runtime	netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

Platform Notes (Continued)

```
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport openipmi
indirect uidd
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-79-generic
root=UUID=b1f703cd-b1aa-4ada-a083-50dc8f47c86c
ro

-----
15. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2000MHz

-----
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

Platform Notes (Continued)

```
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000
```

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

20. Disk information
SPEC is set to: /root/cpu2017znver4A1.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 3.5T 17G 3.3T 1% /

21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: SMC H13
Serial: 123456789

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
6x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.0
BIOS Date: 08/11/2023
BIOS Revision: 5.30

Compiler Version Notes

```
=====| 502.gcc_r(peak)=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

```
=====| 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Aug-2023

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
| peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
| peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Aug-2023

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -fllto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lfllang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

Base Optimization Flags (Continued)

C benchmarks (continued):

-lamdalloc

C++ benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

CPU2017 License: 001176

Test Date: Aug-2023

Test Sponsor: Supermicro

Hardware Availability: Sep-2023

Tested by: Supermicro

Software Availability: Aug-2023

Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lmalloc

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lmalloc
-lflang -lmalloc

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Aug-2023

Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT , AMD EPYC 8534PN)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate®2017_int_base = 439

SPECrate®2017_int_peak = 475

Test Date: Aug-2023

Hardware Availability: Sep-2023

Software Availability: Aug-2023

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Siena-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Siena-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-24 19:42:50-0400.

Report generated on 2023-09-18 11:39:31 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-18.