



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120a-2  
(Intel Xeon E5540)

SPECint®\_rate2006 = 217

SPECint\_rate\_base2006 = 201

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

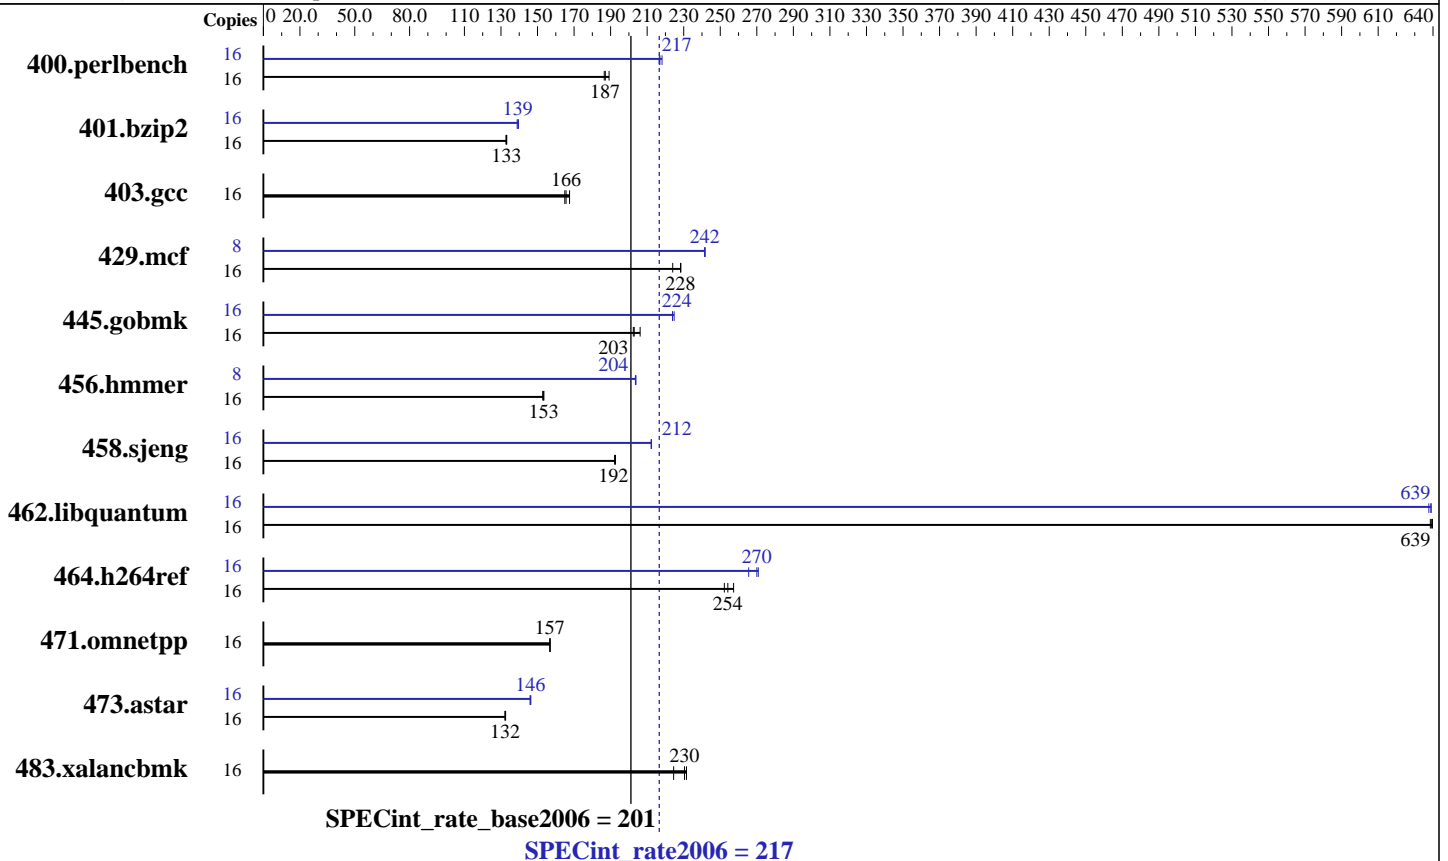

### Hardware

CPU Name: Intel Xeon E5540  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 X 4 GB PC3-8500R, 2 rank, CL7, ECC)  
 Disk Subsystem: 1x146.5 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.081  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120a-2  
(Intel Xeon E5540)

SPECint\_rate2006 = 217

SPECint\_rate\_base2006 = 201

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	838	187	<b>835</b>	<b>187</b>	826	189	16	<b>720</b>	<b>217</b>	722	217	717	218
401.bzip2	16	<b>1161</b>	<b>133</b>	1159	133	1163	133	16	1112	139	<b>1108</b>	<b>139</b>	1106	140
403.gcc	16	769	168	<b>778</b>	<b>166</b>	781	165	16	769	168	<b>778</b>	<b>166</b>	781	165
429.mcf	16	651	224	<b>639</b>	<b>228</b>	639	228	8	302	242	302	241	<b>302</b>	<b>242</b>
445.gobmk	16	<b>827</b>	<b>203</b>	829	202	814	206	16	<b>750</b>	<b>224</b>	750	224	747	225
456.hammer	16	973	153	977	153	<b>973</b>	<b>153</b>	8	367	204	<b>366</b>	<b>204</b>	366	204
458.sjeng	16	<b>1006</b>	<b>192</b>	1007	192	1005	193	16	<b>912</b>	<b>212</b>	912	212	911	212
462.libquantum	16	519	639	<b>519</b>	<b>639</b>	518	640	16	519	639	<b>519</b>	<b>639</b>	520	638
464.h264ref	16	<b>1393</b>	<b>254</b>	1404	252	1376	257	16	<b>1311</b>	<b>270</b>	1307	271	1333	266
471.omnetpp	16	<b>638</b>	<b>157</b>	637	157	638	157	16	<b>638</b>	<b>157</b>	637	157	638	157
473.astar	16	847	133	849	132	<b>849</b>	<b>132</b>	16	770	146	768	146	<b>768</b>	<b>146</b>
483.xalancbmk	16	<b>479</b>	<b>230</b>	492	224	477	232	16	<b>479</b>	<b>230</b>	492	224	477	232

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
NUMA configuration: Enabled

## General Notes

The NEC Express5800/R120a-1(Intel Xeon E5540),  
the NEC Express5800/R120a-2(Intel Xeon E5540),  
the Bull NovaScale R440 E2 (Intel Xeon E5540, 2.53 GHz) and  
the Bull NovaScale R460 E2 (Intel Xeon E5540, 2.53 GHz) models are electronically equivalent.  
The results have been measured on a NEC Express5800/R120a-1(Intel Xeon E5540) model.

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120a-2  
(Intel Xeon E5540)

**SPECint\_rate2006 = 217**

**SPECint\_rate\_base2006 = 201**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc  
456.hmmer: /opt/intel/Compiler/11.0/081/bin/intel64/icc  
458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc

C++ benchmarks (except as noted below):  
icpc

473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint\_rate2006 = 217**

Express5800/R120a-2  
(Intel Xeon E5540)

**SPECint\_rate\_base2006 = 201**

**CPU2006 license:** 9006

**Test date:** Apr-2009

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2009

**Tested by:** NEC Corporation

**Software Availability:** Feb-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
          -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
                -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias

```

C++ benchmarks:

471.omnetpp: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120a-2  
(Intel Xeon E5540)

**SPECint\_rate2006 = 217**

**SPECint\_rate\_base2006 = 201**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
           -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:44:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 May 2009.