



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®_rate2006 = 141

PRIMERGY TX200 S5, Intel Xeon L5506, 2.13 GHz

SPECint_rate_base2006 = 132

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2009

Hardware Availability: Jun-2009

Software Availability: Feb-2009

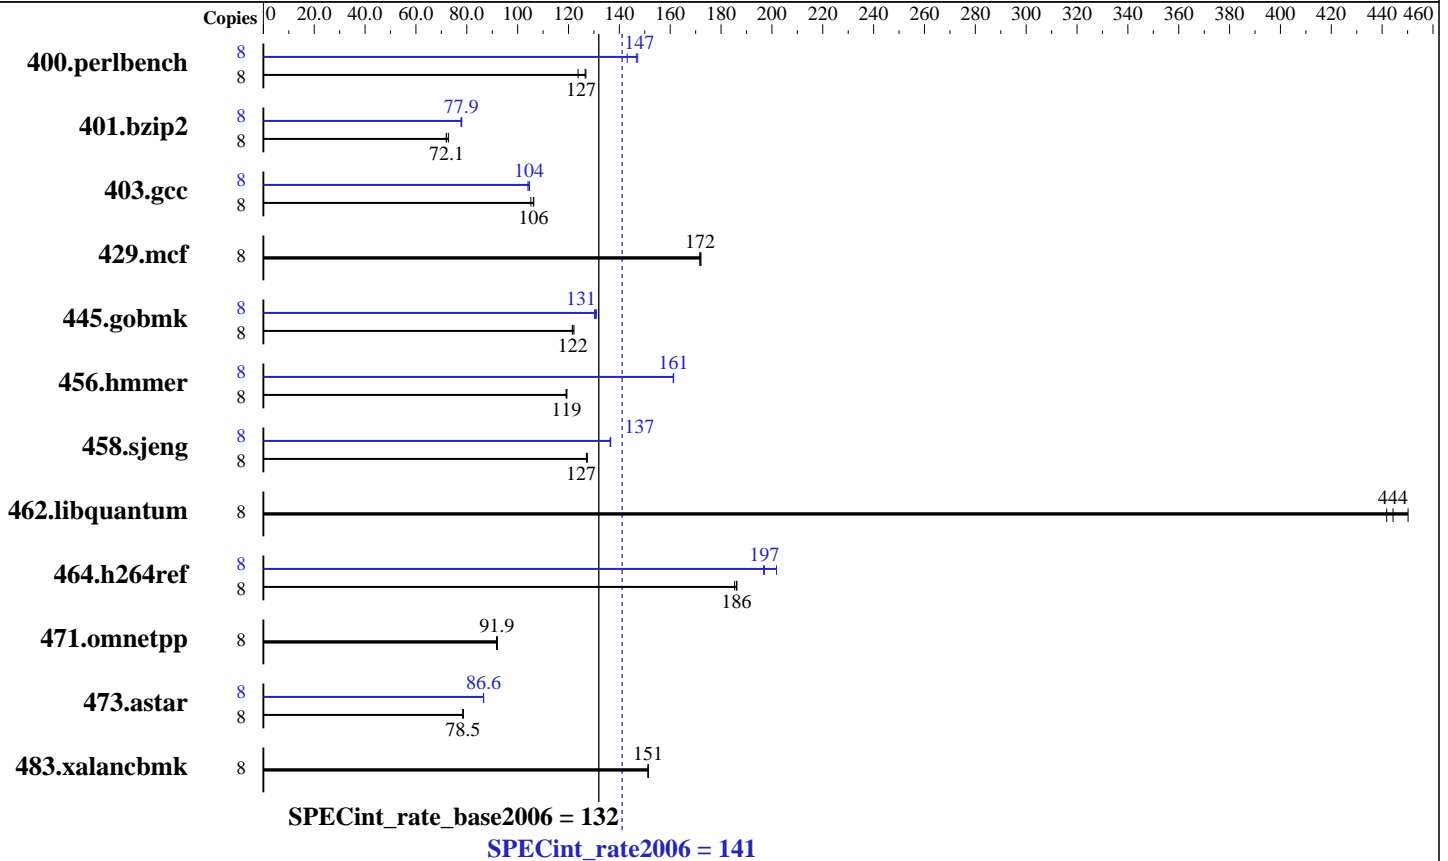

Hardware

CPU Name: Intel Xeon L5506
 CPU Characteristics:
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 141

PRIMERGY TX200 S5, Intel Xeon L5506, 2.13 GHz

SPECint_rate_base2006 = 132

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2009
Hardware Availability: Jun-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	632	124	618	127	616	127	8	531	147	533	147	546	143
401.bzip2	8	1060	72.9	1074	71.9	1071	72.1	8	991	77.9	989	78.0	993	77.7
403.gcc	8	612	105	606	106	606	106	8	619	104	616	104	615	105
429.mcf	8	424	172	425	172	425	172	8	424	172	425	172	425	172
445.gobmk	8	687	122	691	121	689	122	8	642	131	644	130	640	131
456.hammer	8	627	119	626	119	625	119	8	463	161	463	161	463	161
458.sjeng	8	761	127	760	127	762	127	8	710	136	709	137	709	137
462.libquantum	8	373	444	368	450	375	442	8	373	444	368	450	375	442
464.h264ref	8	955	185	952	186	951	186	8	900	197	898	197	877	202
471.omnetpp	8	545	91.7	544	92.0	544	91.9	8	545	91.7	544	92.0	544	91.9
473.astar	8	714	78.7	715	78.5	716	78.4	8	648	86.6	648	86.6	649	86.5
483.xalancbmk	8	365	151	365	151	365	151	8	365	151	365	151	365	151

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 141

PRIMERGY TX200 S5, Intel Xeon L5506, 2.13 GHz

SPECint_rate_base2006 = 132

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2009
Hardware Availability: Jun-2009
Software Availability: Feb-2009

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 141

PRIMERGY TX200 S5, Intel Xeon L5506, 2.13 GHz

SPECint_rate_base2006 = 132

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2009

Hardware Availability: Jun-2009

Software Availability: Feb-2009

Peak Portability Flags (Continued)

473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 141

PRIMERGY TX200 S5, Intel Xeon L5506, 2.13 GHz

SPECint_rate_base2006 = 132

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2009

Hardware Availability: Jun-2009

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:48:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.