



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

## SPECint®\_rate2006 = 123

## Gateway GR320 F1 (Intel Xeon X3470)

## SPECint\_rate\_base2006 = 116

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

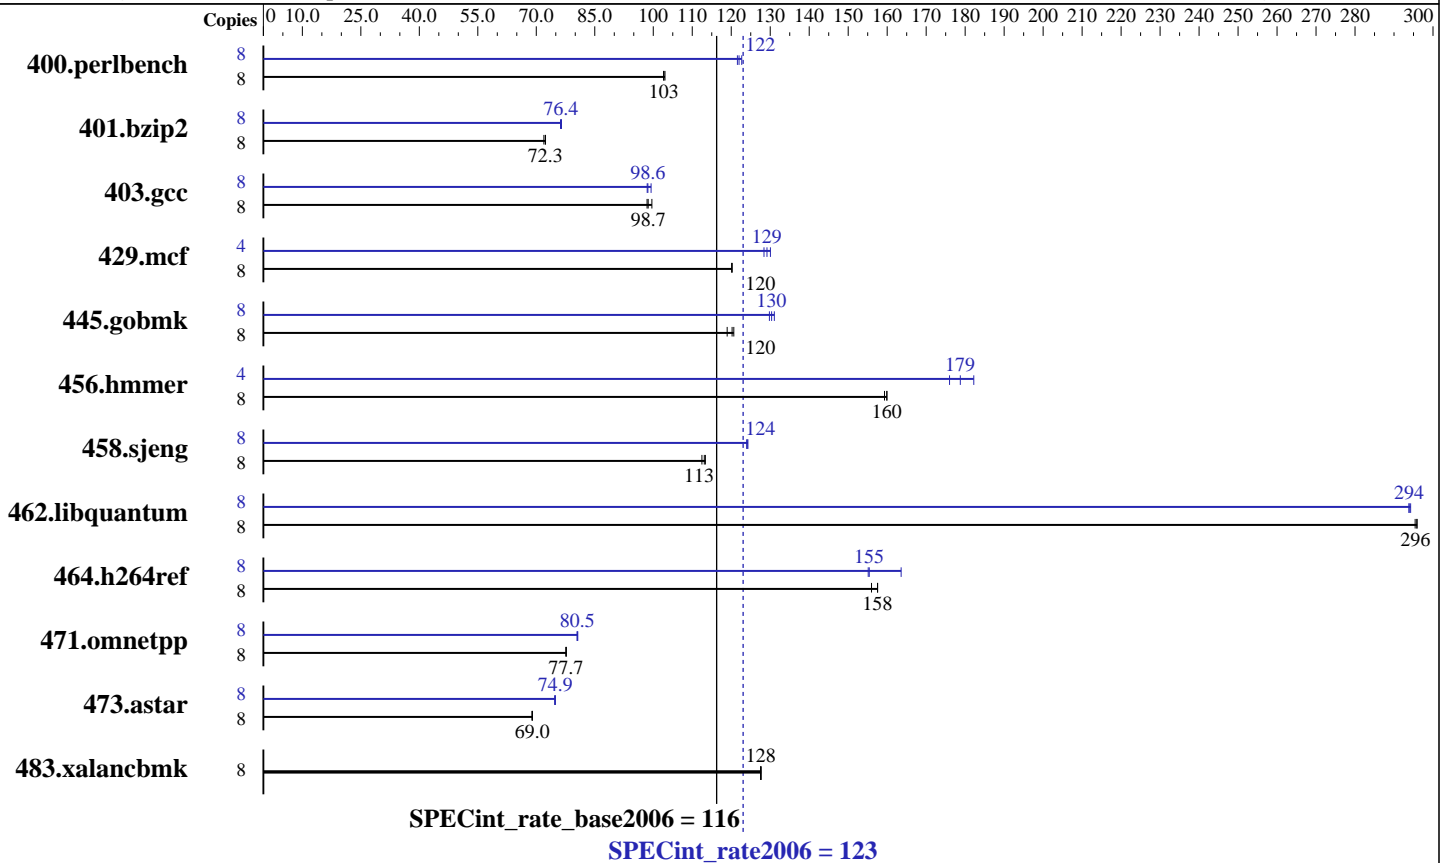

### Hardware

CPU Name: Intel Xeon X3470  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.6 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4096 MB ECC Unbuffered DDR3-1333)  
 Disk Subsystem: 1 x 1000 GB 7200RPM SATA HDD  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Sserver 11 (x86\_64)  
 Kernel 2.6.27.19-5  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 123

Gateway GR320 F1 (Intel Xeon X3470)

SPECint\_rate\_base2006 = 116

CPU2006 license: 97

Test date: Mar-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	759	103	761	103	<u>761</u>	<u>103</u>	8	637	123	643	122	<u>641</u>	<u>122</u>
401.bzip2	8	1067	72.4	<u>1067</u>	<u>72.3</u>	1073	72.0	8	1010	76.5	<u>1011</u>	<u>76.4</u>	1013	76.2
403.gcc	8	<u>652</u>	<u>98.7</u>	654	98.4	646	99.6	8	654	98.4	648	99.4	<u>653</u>	<u>98.6</u>
429.mcf	8	607	120	607	120	<u>607</u>	<u>120</u>	4	284	128	280	130	<u>282</u>	<u>129</u>
445.gobmk	8	705	119	<u>698</u>	<u>120</u>	696	121	8	647	130	640	131	<u>644</u>	<u>130</u>
456.hammer	8	469	159	467	160	<u>467</u>	<u>160</u>	4	<u>209</u>	<u>179</u>	205	182	212	176
458.sjeng	8	861	112	<u>856</u>	<u>113</u>	854	113	8	781	124	779	124	<u>780</u>	<u>124</u>
462.libquantum	8	<u>560</u>	<u>296</u>	560	296	561	295	8	563	294	<u>564</u>	<u>294</u>	564	294
464.h264ref	8	<u>1124</u>	<u>158</u>	1124	158	1135	156	8	1082	164	1141	155	<u>1139</u>	<u>155</u>
471.omnetpp	8	644	77.6	644	77.7	<u>644</u>	<u>77.7</u>	8	621	80.5	620	80.6	<u>621</u>	<u>80.5</u>
473.astar	8	814	69.0	<u>814</u>	<u>69.0</u>	815	68.9	8	750	74.9	752	74.7	<u>750</u>	<u>74.9</u>
483.xalancbmk	8	432	128	<u>433</u>	<u>128</u>	433	128	8	432	128	<u>433</u>	<u>128</u>	433	128

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was set for stacksize unlimited

## General Notes

This result was measured on the Gateway GT310 F1.  
These 4 systems are electronically equivalent:  
Acer AR320 F1, Acer AT310 F1, Gateway GR320 F1, and Gateway GT310 F1.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 123

Gateway GR320 F1 (Intel Xeon X3470)

SPECint\_rate\_base2006 = 116

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 123

Gateway GR320 F1 (Intel Xeon X3470)

SPECint\_rate\_base2006 = 116

CPU2006 license: 97

Test date: Mar-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 123

Gateway GR320 F1 (Intel Xeon X3470)

SPECint\_rate\_base2006 = 116

CPU2006 license: 97

Test date: Mar-2010

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

473.astar (continued):

-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 05:06:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 March 2010.