



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-2022TG-HIBQRF,
AMD Opteron 6180 SE

SPECint®2006 = 23.6

SPECint_base2006 = 18.8

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Feb-2011

Software Availability: May-2010

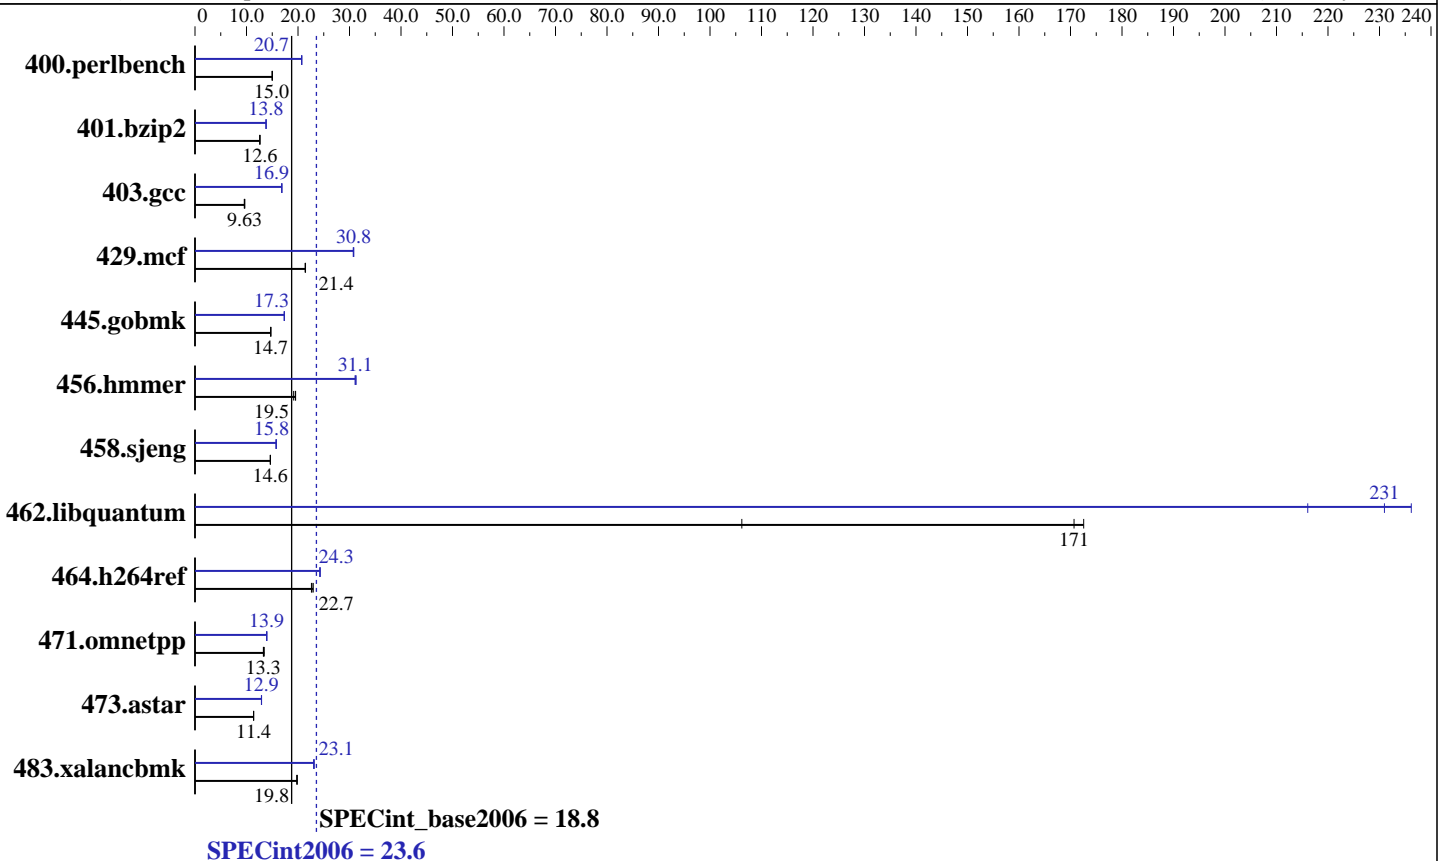

Hardware

CPU Name: AMD Opteron 6180 SE
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 2Rx8 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1,
Kernel 2.6.32.12-0.7-default
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-2022TG-HIBQRF,
AMD Opteron 6180 SE

SPECint2006 = 23.6

SPECint_base2006 = 18.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2010
Hardware Availability: Feb-2011
Software Availability: May-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	653	15.0	649	15.0	651	15.0	471	20.7	472	20.7	471	20.7
401.bzip2	766	12.6	766	12.6	767	12.6	699	13.8	699	13.8	699	13.8
403.gcc	833	9.67	836	9.63	841	9.57	477	16.9	477	16.9	478	16.8
429.mcf	426	21.4	426	21.4	425	21.5	296	30.8	296	30.8	297	30.7
445.gobmk	713	14.7	713	14.7	713	14.7	605	17.3	605	17.3	605	17.3
456.hammer	478	19.5	487	19.2	479	19.5	300	31.1	300	31.1	298	31.3
458.sjeng	826	14.6	827	14.6	827	14.6	767	15.8	770	15.7	766	15.8
462.libquantum	195	106	120	173	121	171	95.9	216	89.7	231	87.7	236
464.h264ref	979	22.6	974	22.7	964	23.0	911	24.3	911	24.3	913	24.2
471.omnetpp	465	13.5	470	13.3	471	13.3	449	13.9	449	13.9	448	14.0
473.astar	618	11.4	616	11.4	616	11.4	544	12.9	544	12.9	543	12.9
483.xalancbmk	348	19.8	349	19.8	348	19.8	299	23.0	299	23.1	298	23.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

powersave -f was used to set the CPU frequency to its maximum.

Platform Notes

Fan Speed set to Full Speed in BIOS Setup.
The system uses a Supermicro H8DGT-HIBQF motherboard.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-speed-libs-revA/64:/usr/cpu2006/amd1002-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23"
O64_OMP_SPIN_USER_LOCK = "true"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-2022TG-HIBQRF,
AMD Opteron 6180 SE

SPECint2006 = 23.6

SPECint_base2006 = 18.8

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Feb-2011

Software Availability: May-2010

General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -apo -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m,limit=450 -LNO:parallel_overhead=10000

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-2022TG-HIBQRF,
AMD Opteron 6180 SE

SPECint2006 = 23.6

SPECint_base2006 = 18.8

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Feb-2011

Software Availability: May-2010

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
            -OPT:alias=disjoint -OPT:unroll_times_max=8
            -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:local_sched_alg=1 -CG:cflow=0
            -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
            -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-2022TG-HIBQRF,
AMD Opteron 6180 SE

SPECint2006 = 23.6

SPECint_base2006 = 18.8

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Feb-2011

Software Availability: May-2010

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -IPA:min_hotness=32 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -apo -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-OPT:alias=disjoint -INLINE:aggressive=on -IPA:space=1000
-IPA:plimit=20000 -mso

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-WOPT:if_conv=0 -m32 -HP:bdt=2m:heap=2m

473.astar: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-2022TG-HIBQRF,
AMD Opteron 6180 SE

SPECint2006 = 23.6

SPECint_base2006 = 18.8

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Feb-2011

Software Availability: May-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 15:18:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 February 2011.