



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228,
AMD Opteron 4162 EE

SPECfp®2006 = 22.9

SPECfp_base2006 = 19.0

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

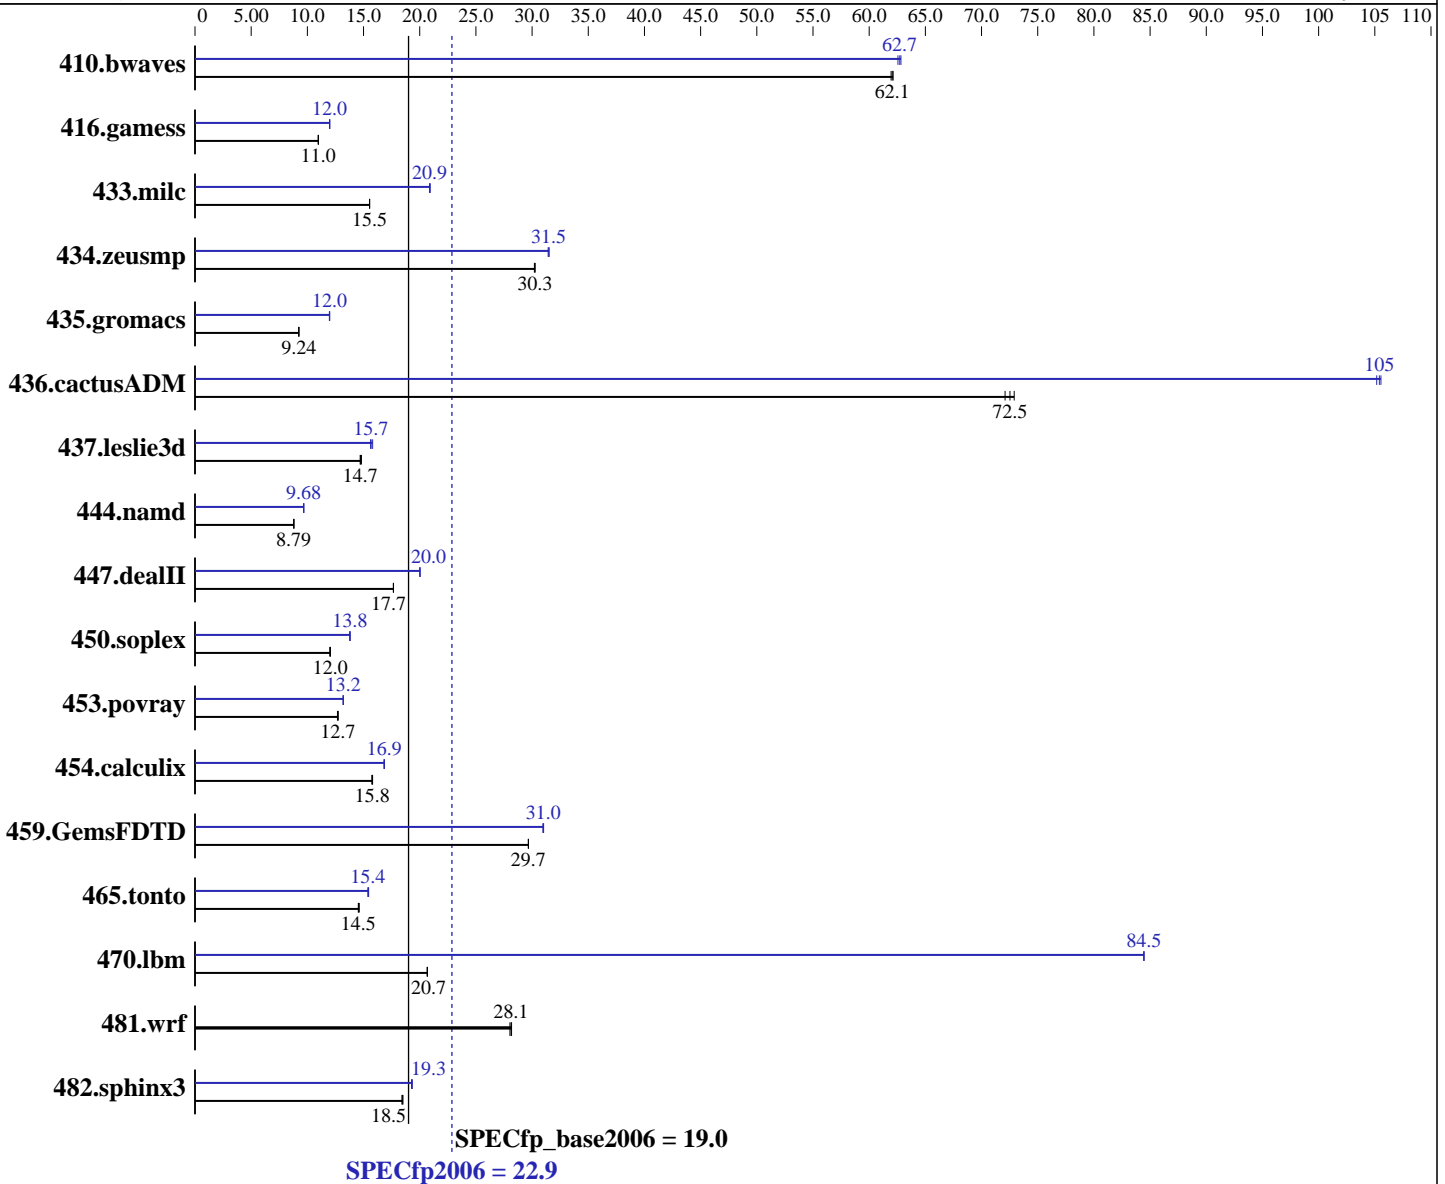

Hardware

CPU Name: AMD Opteron 4162 EE
 CPU Characteristics:
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64),
 Kernel 2.6.27.19-5-default
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228,
AMD Opteron 4162 EE

SPECfp2006 = **22.9**

SPECfp_base2006 = **19.0**

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 128 GB SATA SSD
Crucial RealSSD C300 CTFDDAC128MAG-1G1
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	219	62.1	219	61.9	219	62.1	217	62.7	217	62.6	216	62.8
416.gamess	1784	11.0	1782	11.0	1785	11.0	1632	12.0	1633	12.0	1636	12.0
433.milc	591	15.5	591	15.5	591	15.5	439	20.9	439	20.9	440	20.9
434.zeusmp	301	30.2	301	30.3	301	30.3	289	31.5	290	31.4	289	31.5
435.gromacs	773	9.23	772	9.25	773	9.24	596	12.0	596	12.0	597	12.0
436.cactusADM	165	72.5	164	72.9	166	72.1	114	105	113	106	113	105
437.leslie3d	635	14.8	638	14.7	639	14.7	602	15.6	600	15.7	595	15.8
444.namd	912	8.79	912	8.79	911	8.80	828	9.68	829	9.68	829	9.67
447.dealII	648	17.7	648	17.7	648	17.7	571	20.0	571	20.0	572	20.0
450.soplex	692	12.0	695	12.0	693	12.0	604	13.8	605	13.8	606	13.8
453.povray	418	12.7	418	12.7	420	12.7	403	13.2	403	13.2	403	13.2
454.calculix	524	15.7	523	15.8	522	15.8	489	16.9	491	16.8	489	16.9
459.GemsFDTD	358	29.7	358	29.7	357	29.7	342	31.0	343	31.0	342	31.0
465.tonto	676	14.5	677	14.5	673	14.6	639	15.4	637	15.5	639	15.4
470.lbm	665	20.7	664	20.7	665	20.7	163	84.5	163	84.4	163	84.5
481.wrf	396	28.2	399	28.0	397	28.1	396	28.2	399	28.0	397	28.1
482.sphinx3	1053	18.5	1058	18.4	1056	18.5	1010	19.3	1011	19.3	1008	19.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=1000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

powersave -f was used to set the CPU frequency to its maximum.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228,
AMD Opteron 4162 EE

SPECfp2006 = 22.9

SPECfp_base2006 = 19.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

Operating System Notes (Continued)

Binaries were compiled on SLES10 SP2 with binutils 2.18

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002-speed-libs-revA/64:/root/work/cpu2006/amd1002-speed-libs-revA/32"

O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5"

O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228,
AMD Opteron 4162 EE

SPECfp2006 = 22.9

SPECfp_base2006 = 19.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m

C++ benchmarks:

-march=barcelona -Ofast -static -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

-march=barcelona -Ofast -apo -LNO:parallel_overhead=10000
-LNO:fusion_peeling_limit=0 -HP:bdt=2m:heap=2m

Benchmarks using both Fortran and C:

-march=barcelona -Ofast -HP:bdt=2m:heap=2m -apo
-LNO:parallel_overhead=10000 -LNO:fusion_peeling_limit=0

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228,
AMD Opteron 4162 EE

SPECfp2006 = 22.9

SPECfp_base2006 = 19.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -Ofast -apo -CG:movnti=1
 -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
 -CG:compute_to=on -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: -march=barcelona -Ofast -mso -apo -CG:sse_cse_regs=0
 -LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
 -CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
 -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
 -CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
 -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -CG:load_exe=0 -fno-exceptions
 -m32 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228,
AMD Opteron 4162 EE

SPECfp2006 = 22.9

SPECfp_base2006 = 19.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -march=barcelona -Ofast -apo -OPT:malloc_alg=2
-CG:use_prefetchnta=on -CG:cmp_peep=on -LNO:blocking=off
-LNO:prefetch=3 -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -LNO:apo_use_feedback=on
-WOPT:aggstr=0

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -Ofast -apo -LNO:blocking=off
-LNO:interchange=off -LNO:fusion_peeling_limit=0
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-CG:compute_to=on -GRA:prioritize_by_density=on
-HP:bdt=2m:heap=2m

437.leslie3d: -march=barcelona -Ofast -apo -OPT:unroll_size=256
-LNO:prefetch_ahead=4 -LNO:parallel_overhead=32768
-GRA:prioritize_by_density=on -m3dnow -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -Ofast -apo -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -Ofast -apo
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -apo -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo
-LANG:heap_allocation_threshold=1000 -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m

454.calculix: -march=barcelona -Ofast -LNO:prefetch_ahead=30
-CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2
-CG:compute_to=on -WOPT:unroll=2 -GRA:optimize_boundary=on
-HP:bdt=2m:heap=2m -apo

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

Tyan YR190B8228,
AMD Opteron 4162 EE

SPECfp2006 = 22.9

SPECfp_base2006 = 19.0

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 15:25:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 February 2011.