



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint®\_rate2006 = 392**

Huawei XH620, Intel Xeon X5670

**SPECint\_rate\_base2006 = 366**

CPU2006 license: 3175


**Test date:** Sep-2011

**Test sponsor:** Huawei

**Hardware Availability:** May-2011

**Tested by:** Huawei

**Software Availability:** Jan-2011

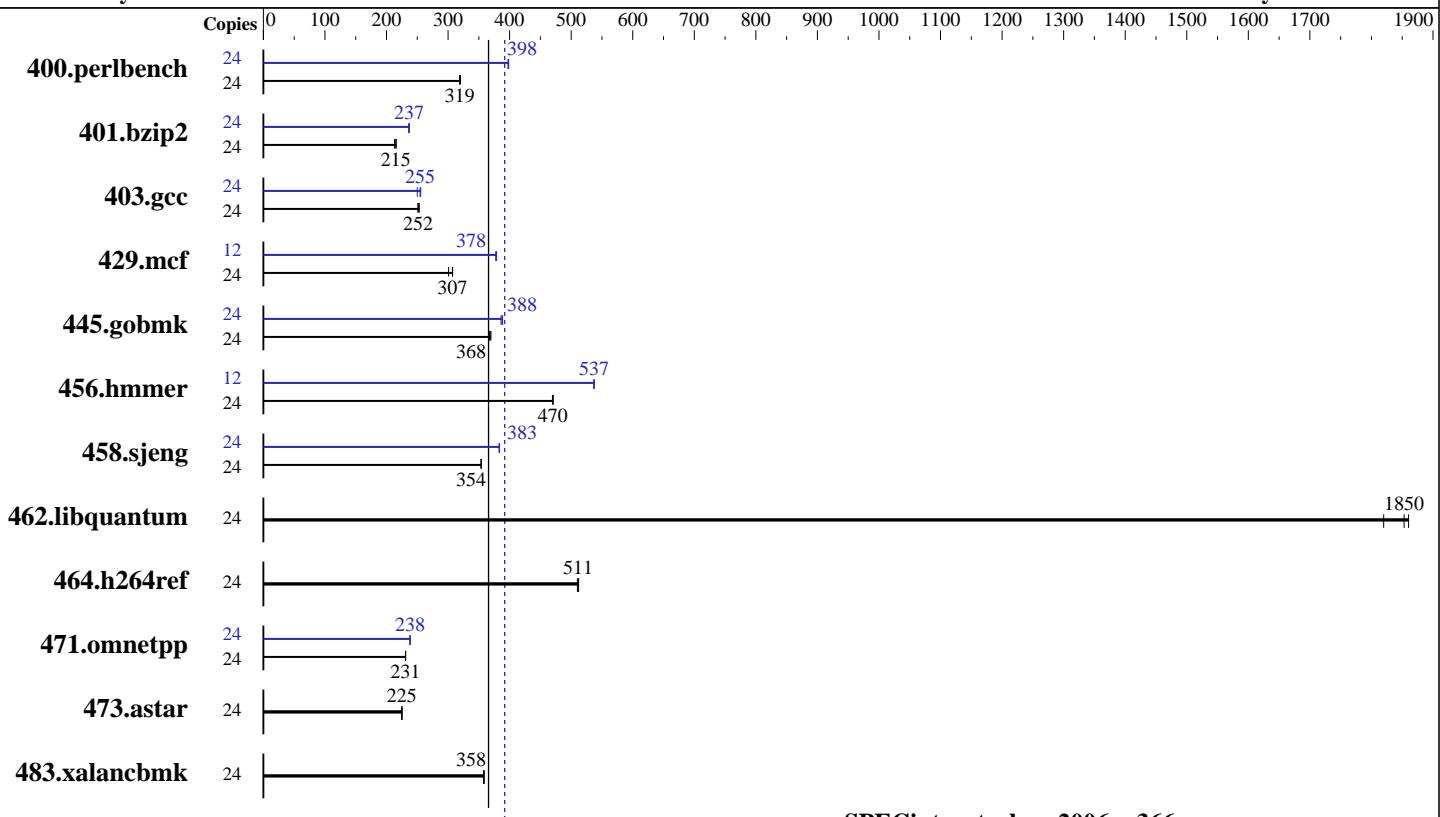

**SPECint\_rate\_base2006 = 366**

**SPECint\_rate2006 = 392**

## Hardware

CPU Name: Intel Xeon X5670  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 15K RPM  
Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
Compiler: C++: Version 12.0.1.116 of Intel 64 Compiler XE Build 20101116  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 392**

Huawei XH620,Intel Xeon X5670

**SPECint\_rate\_base2006 = 366**

CPU2006 license: 3175

Test date: Sep-2011

Test sponsor: Huawei

Hardware Availability: May-2011

Tested by: Huawei

Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	733	320	735	319	<b>735</b>	<b>319</b>	24	<b>590</b>	<b>398</b>	588	399	590	398
401.bzip2	24	1087	213	1073	216	<b>1077</b>	<b>215</b>	24	976	237	981	236	<b>977</b>	<b>237</b>
403.gcc	24	<b>768</b>	<b>252</b>	763	253	770	251	24	756	256	<b>759</b>	<b>255</b>	773	250
429.mcf	24	<b>713</b>	<b>307</b>	712	307	728	301	12	<b>289</b>	<b>378</b>	289	379	290	378
445.gobmk	24	<b>683</b>	<b>368</b>	686	367	681	370	24	648	389	<b>649</b>	<b>388</b>	652	386
456.hammer	24	476	471	<b>476</b>	<b>470</b>	477	470	12	<b>208</b>	<b>537</b>	209	537	208	537
458.sjeng	24	<b>821</b>	<b>354</b>	821	354	821	354	24	758	383	757	383	<b>758</b>	<b>383</b>
462.libquantum	24	267	1860	<b>268</b>	<b>1850</b>	273	1820	24	267	1860	<b>268</b>	<b>1850</b>	273	1820
464.h264ref	24	1041	510	<b>1038</b>	<b>511</b>	1037	512	24	1041	510	<b>1038</b>	<b>511</b>	1037	512
471.omnetpp	24	649	231	650	231	<b>650</b>	<b>231</b>	24	630	238	<b>630</b>	<b>238</b>	630	238
473.astar	24	748	225	<b>749</b>	<b>225</b>	749	225	24	748	225	<b>749</b>	<b>225</b>	749	225
483.xalancbmk	24	463	358	<b>463</b>	<b>358</b>	462	359	24	463	358	<b>463</b>	<b>358</b>	462	359

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

Data Reuse Optimization disabled in BIOS Setup.

## General Notes

Binaries compiled on RHEL 5.5

## Base Compiler Invocation

C benchmarks:

icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 392**

Huawei XH620,Intel Xeon X5670

**SPECint\_rate\_base2006 = 366**

CPU2006 license: 3175

**Test date:** Sep-2011

Test sponsor: Huawei

**Hardware Availability:** May-2011

Tested by: Huawei

**Software Availability:** Jan-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 392**

Huawei XH620, Intel Xeon X5670

**SPECint\_rate\_base2006 = 366**

CPU2006 license: 3175

Test date: Sep-2011

Test sponsor: Huawei

Hardware Availability: May-2011

Tested by: Huawei

Software Availability: Jan-2011

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -opt-prefetch -auto-ilp32 -ansi-alias
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
  -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
  -ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -unroll14 -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
  -L/smartheap -lsmartheap
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 392

Huawei XH620,Intel Xeon X5670

SPECint\_rate\_base2006 = 366

CPU2006 license: 3175

Test date: Sep-2011

Test sponsor: Huawei

Hardware Availability: May-2011

Tested by: Huawei

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:46:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 October 2011.