



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = **58.5**

PRIMERGY BX920 S3, Intel Xeon E5-2450L, 1.80 GHz

SPECfp\_base2006 = **55.9**

CPU2006 license: 19


Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Feb-2012

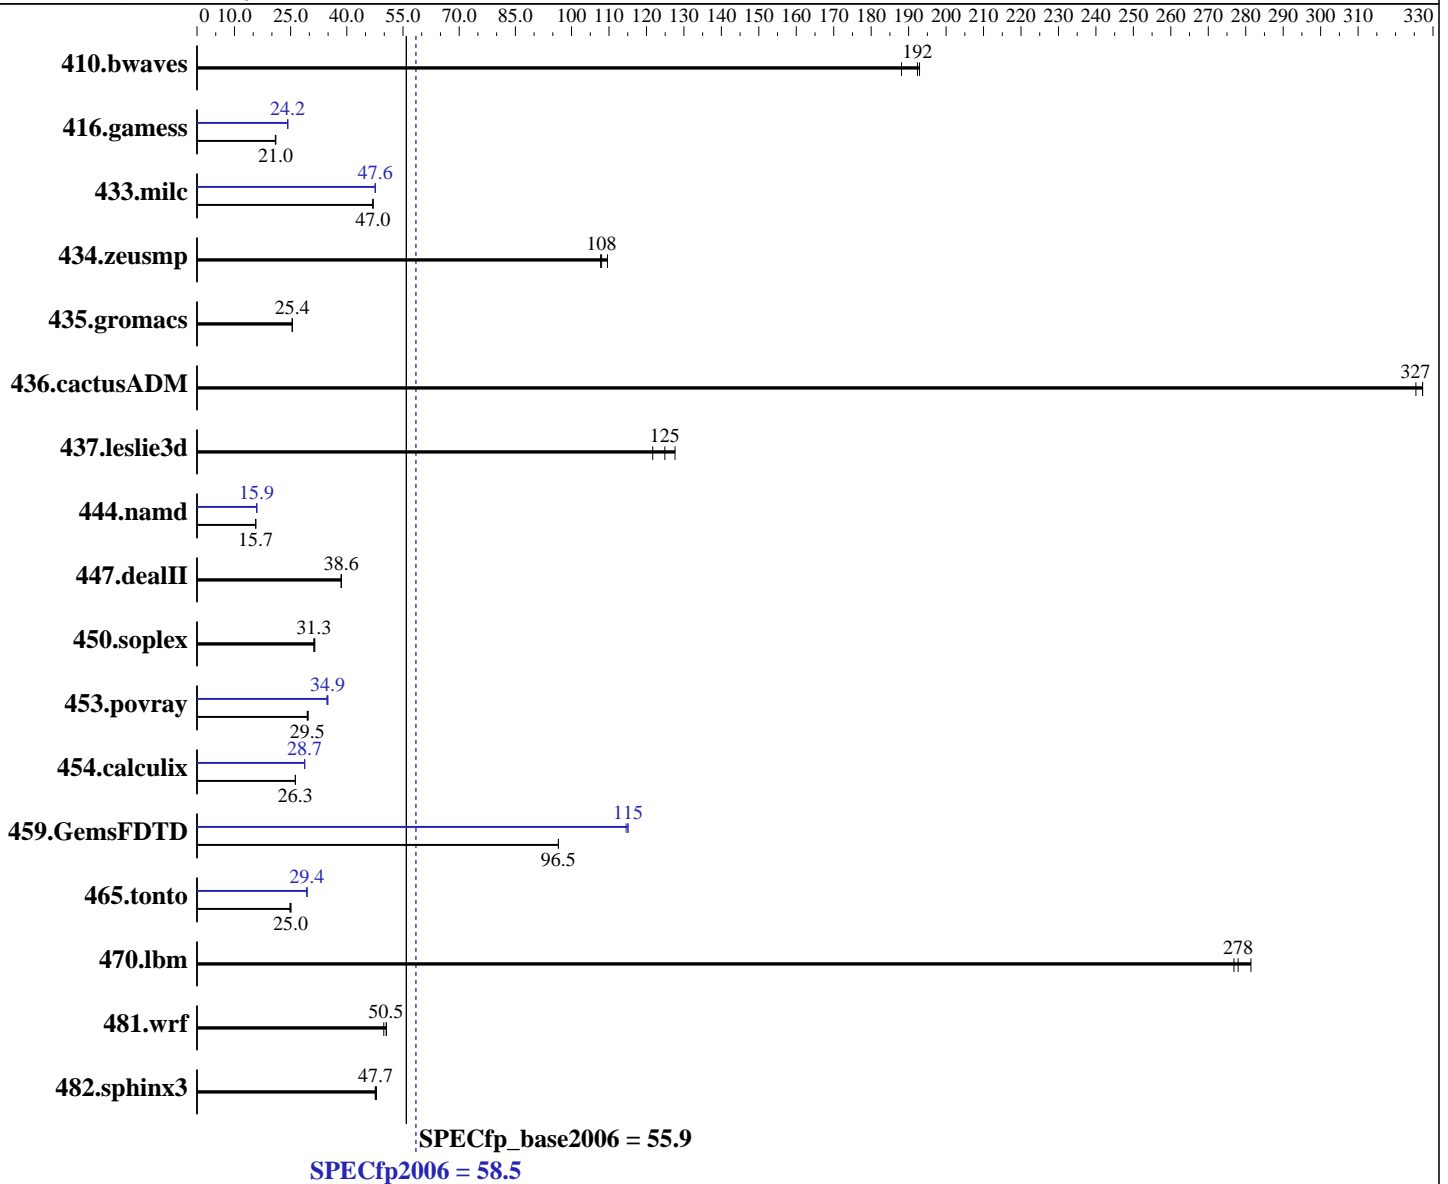

**Hardware**

CPU Name: Intel Xeon E5-2450L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.30 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **58.5**

PRIMERGY BX920 S3, Intel Xeon E5-2450L, 1.80 GHz

SPECfp\_base2006 = **55.9**

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72.2	188	<b>70.7</b>	<b>192</b>	70.4	193	72.2	188	<b>70.7</b>	<b>192</b>	70.4	193
416.gamess	936	20.9	931	21.0	<b>932</b>	<b>21.0</b>	808	24.2	809	24.2	<b>809</b>	<b>24.2</b>
433.milc	195	47.0	<b>195</b>	<b>47.0</b>	196	46.9	193	47.6	193	47.6	<b>193</b>	<b>47.6</b>
434.zeusmp	83.0	110	<b>84.2</b>	<b>108</b>	84.4	108	83.0	110	<b>84.2</b>	<b>108</b>	84.4	108
435.gromacs	281	25.4	<b>281</b>	<b>25.4</b>	281	25.4	281	25.4	<b>281</b>	<b>25.4</b>	281	25.4
436.cactusADM	36.5	327	<b>36.5</b>	<b>327</b>	36.7	325	36.5	327	<b>36.5</b>	<b>327</b>	36.7	325
437.leslie3d	77.3	122	<b>75.3</b>	<b>125</b>	73.6	128	77.3	122	<b>75.3</b>	<b>125</b>	73.6	128
444.namd	512	15.7	<b>512</b>	<b>15.7</b>	512	15.7	503	15.9	<b>503</b>	<b>15.9</b>	503	16.0
447.dealII	<b>297</b>	<b>38.6</b>	297	38.5	297	38.6	<b>297</b>	<b>38.6</b>	297	38.5	297	38.6
450.soplex	<b>267</b>	<b>31.3</b>	265	31.5	267	31.2	<b>267</b>	<b>31.3</b>	265	31.5	267	31.2
453.povray	181	29.4	<b>180</b>	<b>29.5</b>	179	29.7	<b>153</b>	<b>34.9</b>	153	34.7	152	35.0
454.calculix	<b>314</b>	<b>26.3</b>	314	26.2	314	26.3	<b>287</b>	<b>28.7</b>	287	28.7	287	28.7
459.GemsFDTD	<b>110</b>	<b>96.5</b>	110	96.5	110	96.5	92.2	115	92.6	115	<b>92.2</b>	<b>115</b>
465.tonto	392	25.1	<b>393</b>	<b>25.0</b>	396	24.8	336	29.3	<b>335</b>	<b>29.4</b>	335	29.4
470.lbm	48.8	281	<b>49.4</b>	<b>278</b>	49.6	277	48.8	281	<b>49.4</b>	<b>278</b>	49.6	277
481.wrf	<b>221</b>	<b>50.5</b>	221	50.6	224	49.9	<b>221</b>	<b>50.5</b>	221	50.6	224	49.9
482.sphinx3	<b>409</b>	<b>47.7</b>	407	47.9	410	47.6	<b>409</b>	<b>47.7</b>	407	47.9	410	47.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Intel HT Technology = Disable  
 Frequency Floor Override = Enable

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,scatter"  
 LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 58.5**

PRIMERGY BX920 S3, Intel Xeon E5-2450L, 1.80 GHz

**SPECfp\_base2006 = 55.9**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Feb-2012

## General Notes (Continued)

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x E3-1270v2 CPU + 32 GB memory using RHEL6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 58.5**

PRIMERGY BX920 S3, Intel Xeon E5-2450L, 1.80 GHz

**SPECfp\_base2006 = 55.9**

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 58.5**

PRIMERGY BX920 S3, Intel Xeon E5-2450L, 1.80 GHz

**SPECfp\_base2006 = 55.9**

**CPU2006 license:** 19

**Test date:** May-2012

**Test sponsor:** Fujitsu

**Hardware Availability:** May-2012

**Tested by:** Fujitsu

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 58.5

PRIMERGY BX920 S3, Intel Xeon E5-2450L, 1.80 GHz

SPECfp\_base2006 = 55.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:17:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 June 2012.