



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 366

PowerEdge R715 (AMD Opteron 6344, 2.60 GHz)

SPECfp_rate_base2006 = 331

CPU2006 license: 55


Test date: Dec-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

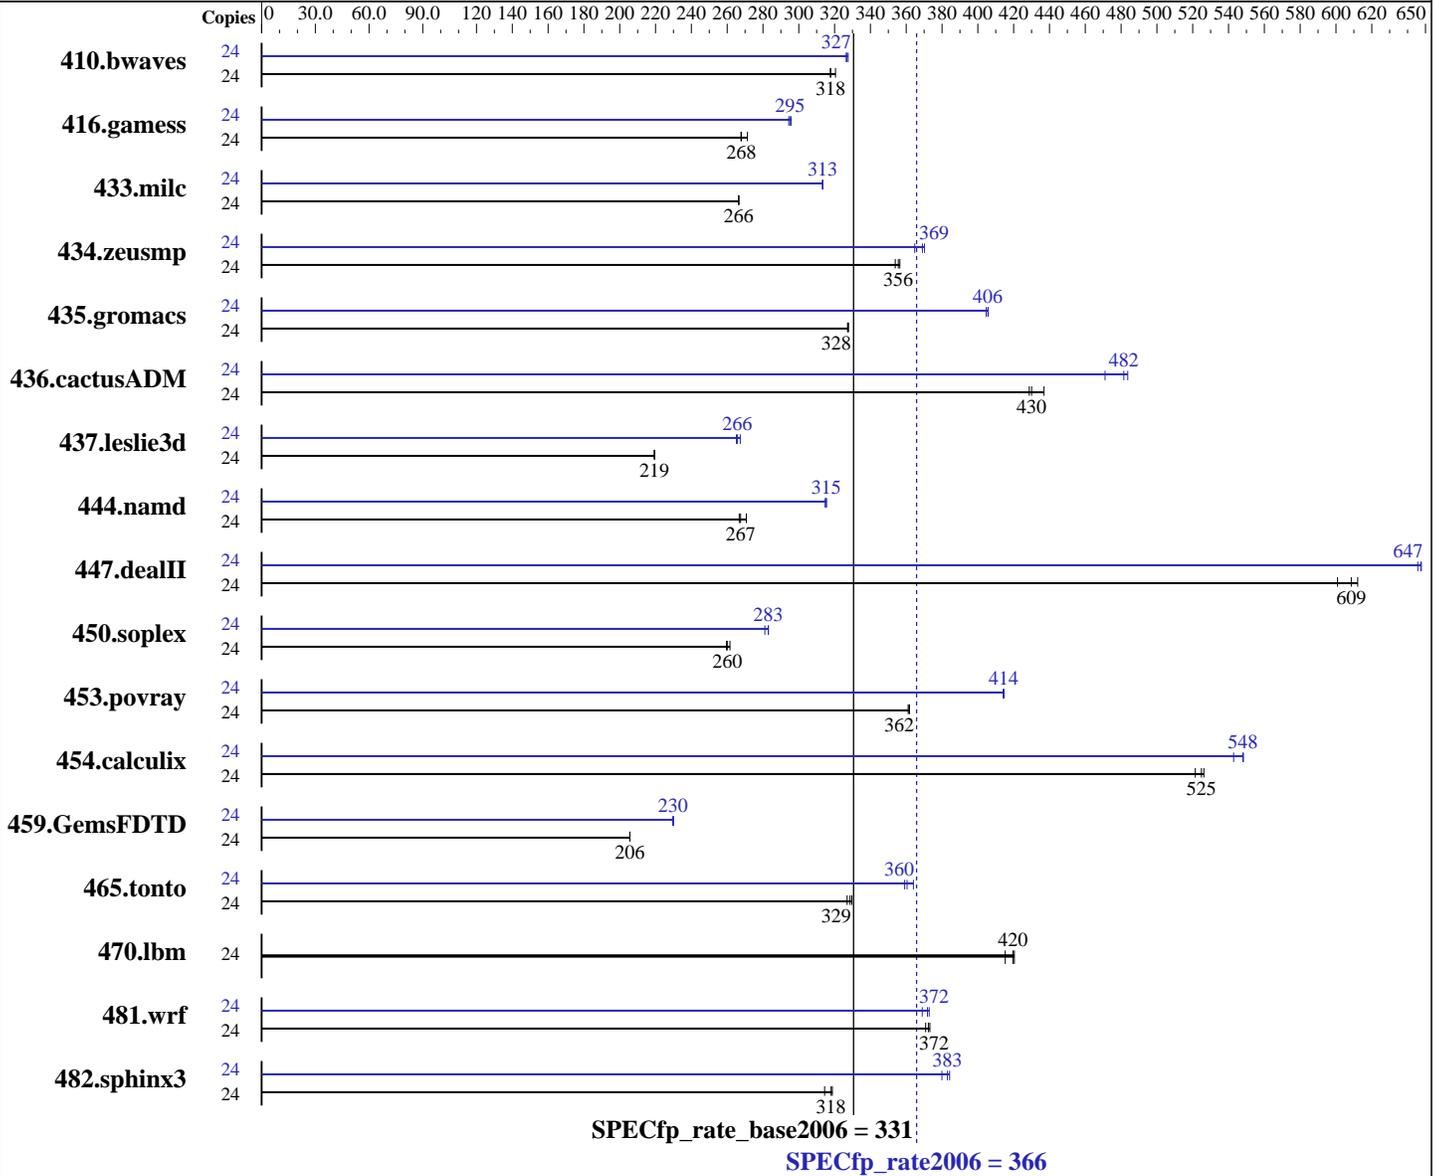

Hardware

CPU Name: AMD Opteron 6344
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 366

PowerEdge R715 (AMD Opteron 6344, 2.60 GHz)

SPECfp_rate_base2006 = 331

CPU2006 license: 55

Test date: Dec-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 6 x 73 GB 7200 RPM SATA

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	<u>1026</u>	<u>318</u>	1027	318	1018	321	24	996	328	<u>998</u>	<u>327</u>	999	326		
416.gamess	24	1732	271	<u>1754</u>	<u>268</u>	1755	268	24	<u>1593</u>	<u>295</u>	1596	294	1589	296		
433.milc	24	826	267	<u>827</u>	<u>266</u>	827	266	24	703	313	703	313	<u>703</u>	<u>313</u>		
434.zeusmp	24	617	354	613	356	<u>614</u>	<u>356</u>	24	<u>592</u>	<u>369</u>	590	370	599	365		
435.gromacs	24	<u>523</u>	<u>328</u>	524	327	523	328	24	423	405	<u>422</u>	<u>406</u>	422	406		
436.cactusADM	24	669	429	<u>667</u>	<u>430</u>	656	437	24	593	484	609	471	<u>596</u>	<u>482</u>		
437.leslie3d	24	1028	219	<u>1028</u>	<u>219</u>	1029	219	24	851	265	844	267	<u>849</u>	<u>266</u>		
444.namd	24	722	267	711	271	<u>720</u>	<u>267</u>	24	612	315	610	315	<u>610</u>	<u>315</u>		
447.dealII	24	457	601	449	612	<u>451</u>	<u>609</u>	24	<u>424</u>	<u>647</u>	424	648	425	646		
450.soplex	24	771	260	<u>770</u>	<u>260</u>	765	262	24	707	283	<u>707</u>	<u>283</u>	712	281		
453.povray	24	354	361	353	362	<u>353</u>	<u>362</u>	24	<u>308</u>	<u>414</u>	308	415	308	414		
454.calculix	24	380	521	<u>377</u>	<u>525</u>	376	526	24	361	548	<u>361</u>	<u>548</u>	365	543		
459.GemsFDTD	24	1238	206	<u>1238</u>	<u>206</u>	1238	206	24	1107	230	1109	230	<u>1108</u>	<u>230</u>		
465.tonto	24	<u>719</u>	<u>329</u>	722	327	717	330	24	658	359	649	364	<u>655</u>	<u>360</u>		
470.lbm	24	794	415	<u>786</u>	<u>420</u>	784	420	24	794	415	<u>786</u>	<u>420</u>	784	420		
481.wrf	24	723	371	<u>720</u>	<u>372</u>	718	373	24	719	373	<u>721</u>	<u>372</u>	727	369		
482.sphinx3	24	1488	314	<u>1471</u>	<u>318</u>	1467	319	24	1217	384	<u>1221</u>	<u>383</u>	1231	380		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 366

PowerEdge R715 (AMD Opteron 6344, 2.60 GHz)

SPECfp_rate_base2006 = 331

CPU2006 license: 55

Test date: Dec-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 366

PowerEdge R715 (AMD Opteron 6344, 2.60 GHz)

SPECfp_rate_base2006 = 331

CPU2006 license: 55

Test date: Dec-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 366

PowerEdge R715 (AMD Opteron 6344, 2.60 GHz)

SPECfp_rate_base2006 = 331

CPU2006 license: 55

Test date: Dec-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: basepeak = yes

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.deallI: -Ofast -D_OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 366

PowerEdge R715 (AMD Opteron 6344, 2.60 GHz)

SPECfp_rate_base2006 = 331

CPU2006 license: 55

Test date: Dec-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2
```

Fortran benchmarks:

```
410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1
```

```
416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1
```

```
434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1
```

```
437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1
```

```
459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1
```

```
465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1
```

Benchmarks using both Fortran and C:

```
435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3
```

```
436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1
```

```
454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
-march=bdver1
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 366

PowerEdge R715 (AMD Opteron 6344, 2.60 GHz)

SPECfp_rate_base2006 = 331

CPU2006 license: 55

Test date: Dec-2012

Test sponsor: Dell Inc.

Hardware Availability: Dec-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
         -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
         -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:49:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 January 2013.