



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3630 M4  
(Intel Xeon E5-2420 v2, 2.20 GHz)

SPECint®\_rate2006 = 435

SPECint\_rate\_base2006 = 419

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jun-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

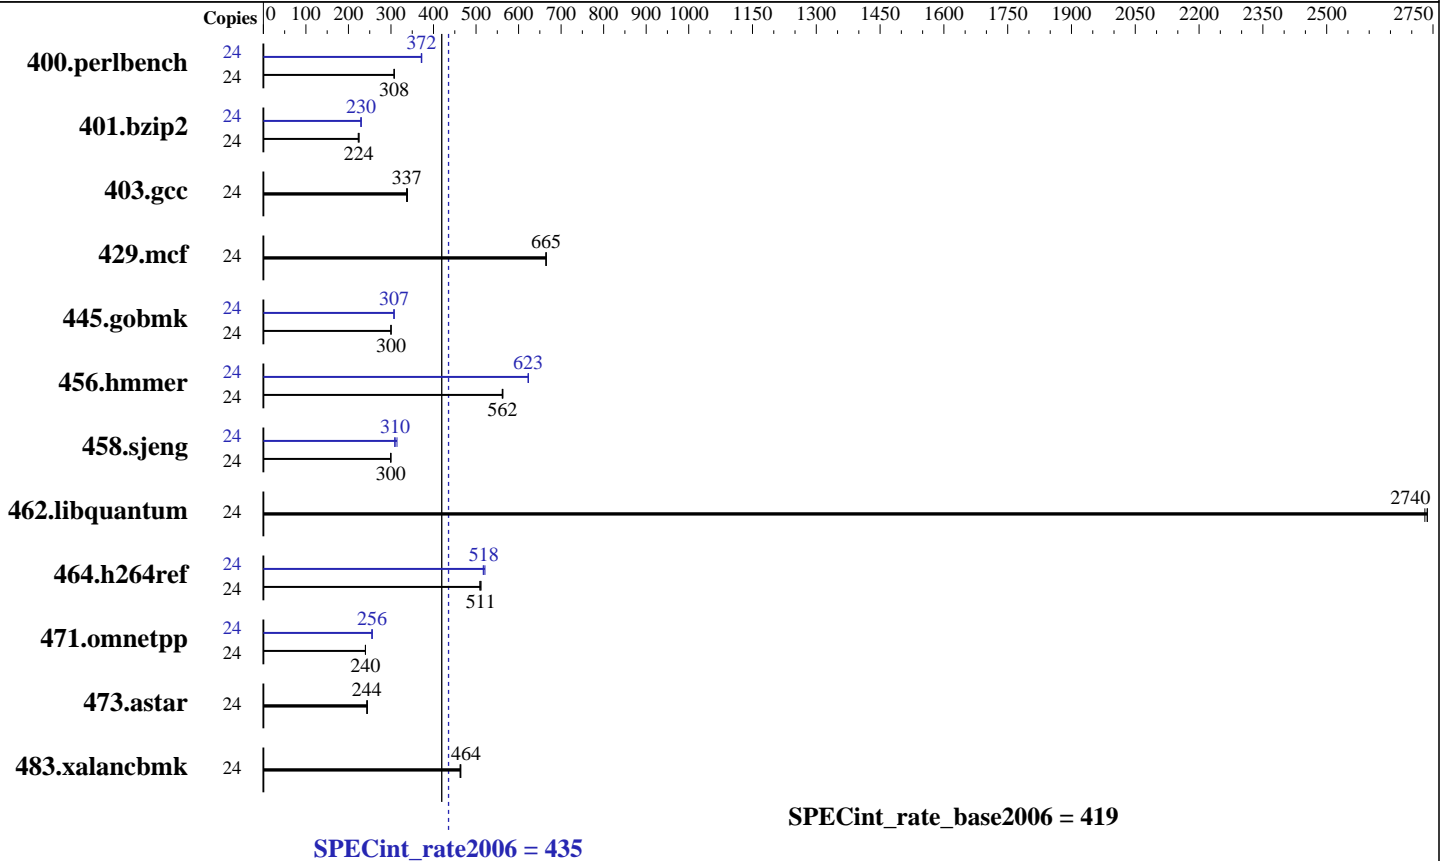

### Hardware

CPU Name: Intel Xeon E5-2420 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2420 v2, 2.20 GHz)

SPECint\_rate2006 = 435

SPECint\_rate\_base2006 = 419

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jun-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b><u>762</u></b>	<b><u>308</u></b>	762	308	763	307	24	631	371	<b><u>631</u></b>	<b><u>372</u></b>	630	372
401.bzip2	24	1039	223	<b><u>1032</u></b>	<b><u>224</u></b>	1030	225	24	<b><u>1009</u></b>	<b><u>230</u></b>	1010	229	1007	230
403.gcc	24	570	339	573	337	<b><u>573</u></b>	<b><u>337</u></b>	24	570	339	573	337	<b><u>573</u></b>	<b><u>337</u></b>
429.mcf	24	<b><u>329</u></b>	<b><u>665</u></b>	329	665	329	664	24	<b><u>329</u></b>	<b><u>665</u></b>	329	665	329	664
445.gobmk	24	839	300	<b><u>839</u></b>	<b><u>300</u></b>	839	300	24	819	307	820	307	<b><u>820</u></b>	<b><u>307</u></b>
456.hammer	24	<b><u>398</u></b>	<b><u>562</u></b>	398	563	399	562	24	<b><u>360</u></b>	<b><u>623</u></b>	360	623	359	623
458.sjeng	24	968	300	<b><u>969</u></b>	<b><u>300</u></b>	971	299	24	<b><u>937</u></b>	<b><u>310</u></b>	941	309	924	314
462.libquantum	24	182	2740	182	2730	<b><u>182</u></b>	<b><u>2740</u></b>	24	182	2740	182	2730	<b><u>182</u></b>	<b><u>2740</u></b>
464.h264ref	24	1038	512	<b><u>1040</u></b>	<b><u>511</u></b>	1044	509	24	1027	517	1020	521	<b><u>1025</u></b>	<b><u>518</u></b>
471.omnetpp	24	625	240	625	240	<b><u>625</u></b>	<b><u>240</u></b>	24	588	255	586	256	<b><u>587</u></b>	<b><u>256</u></b>
473.astar	24	692	243	689	244	<b><u>692</u></b>	<b><u>244</u></b>	24	692	243	689	244	<b><u>692</u></b>	<b><u>244</u></b>
483.xalancbmk	24	<b><u>357</u></b>	<b><u>464</u></b>	358	462	357	464	24	<b><u>357</u></b>	<b><u>464</u></b>	358	462	357	464

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode  
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3630M4 Wed Jun 4 16:58:17 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2420 v2 @ 2.20GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 435**

IBM System x3630 M4  
(Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECint\_rate\_base2006 = 419**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Platform Notes (Continued)

24 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      198462896 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3630M4 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 2 17:51
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3630m4-lv_home ext4  1.8T  11G  1.7T  1% /home
```

```
Additional information from dmidecode:
BIOS IBM  -[BEE135VUS-1.60]- 01/14/2014
Memory:
12x Samsung M393B2G70QH0-YK0 16 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"
```

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECint\_rate2006 = 435**

**SPECint\_rate\_base2006 = 419**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECint\_rate2006 = 435**

**SPECint\_rate\_base2006 = 419**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll2 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECint\_rate2006 = 435**

**SPECint\_rate\_base2006 = 419**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:12:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 July 2014.