



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 91.0

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECfp_base2006 = 87.1

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jan-2015

Hardware Availability: Apr-2015

Software Availability: Apr-2015

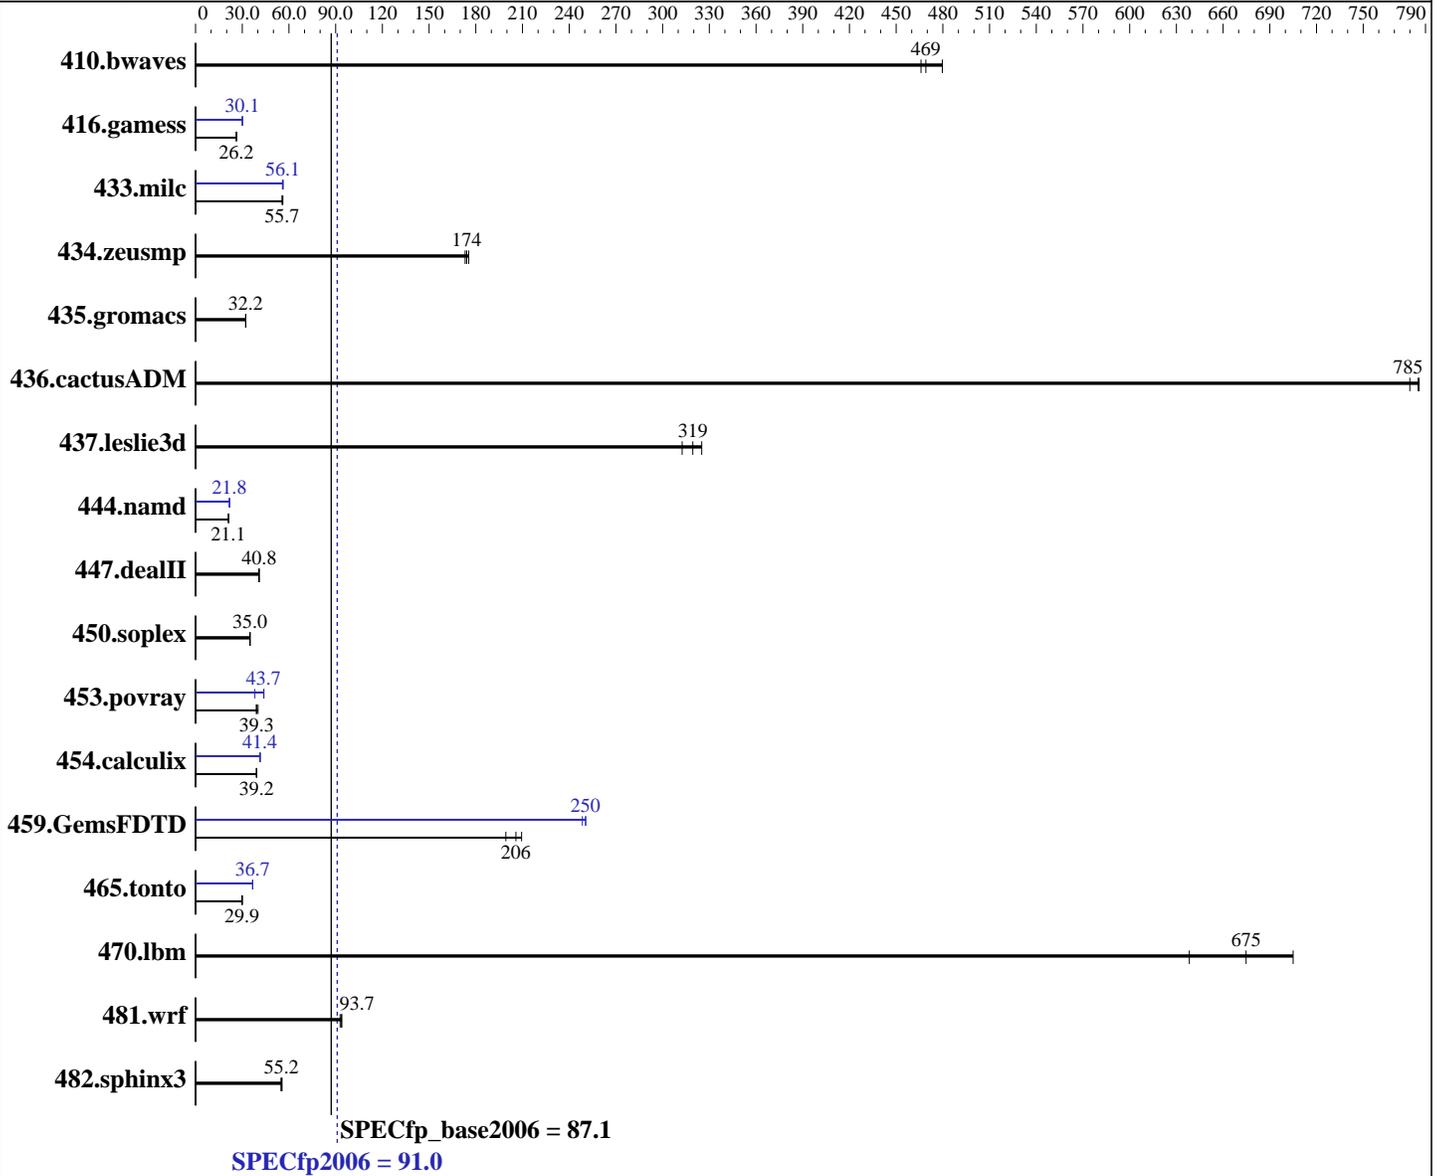

Hardware

CPU Name: Intel Xeon E5-2650L v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 91.0

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECfp_base2006 = 87.1

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 120 GB SSD SATA
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>29.0</u>	<u>469</u>	29.2	466	28.3	480	<u>29.0</u>	<u>469</u>	29.2	466	28.3	480
416.gamess	749	26.2	<u>746</u>	<u>26.2</u>	744	26.3	649	30.2	652	30.0	<u>651</u>	<u>30.1</u>
433.milc	165	55.6	<u>165</u>	<u>55.7</u>	164	56.1	<u>164</u>	<u>56.1</u>	163	56.2	165	55.8
434.zeusmp	<u>52.3</u>	<u>174</u>	52.6	173	51.9	175	<u>52.3</u>	<u>174</u>	52.6	173	51.9	175
435.gromacs	<u>222</u>	<u>32.2</u>	221	32.3	222	32.2	<u>222</u>	<u>32.2</u>	221	32.3	222	32.2
436.cactusADM	15.3	780	15.2	786	<u>15.2</u>	<u>785</u>	15.3	780	15.2	786	<u>15.2</u>	<u>785</u>
437.leslie3d	<u>29.4</u>	<u>319</u>	28.9	325	30.1	313	<u>29.4</u>	<u>319</u>	28.9	325	30.1	313
444.namd	379	21.1	<u>379</u>	<u>21.1</u>	378	21.2	368	21.8	368	21.8	<u>368</u>	<u>21.8</u>
447.dealII	<u>280</u>	<u>40.8</u>	281	40.7	280	40.9	<u>280</u>	<u>40.8</u>	281	40.7	280	40.9
450.soplex	<u>238</u>	<u>35.0</u>	239	34.9	238	35.0	<u>238</u>	<u>35.0</u>	239	34.9	238	35.0
453.povray	136	39.0	<u>136</u>	<u>39.3</u>	133	40.1	121	43.9	<u>122</u>	<u>43.7</u>	140	38.1
454.calculix	211	39.2	<u>211</u>	<u>39.2</u>	211	39.1	198	41.6	200	41.3	<u>199</u>	<u>41.4</u>
459.GemsFDTD	53.2	199	50.7	209	<u>51.6</u>	<u>206</u>	<u>42.4</u>	<u>250</u>	42.3	251	42.7	248
465.tonto	328	30.0	<u>329</u>	<u>29.9</u>	329	29.9	<u>268</u>	<u>36.7</u>	269	36.6	268	36.7
470.lbm	<u>20.4</u>	<u>675</u>	21.5	638	19.5	705	<u>20.4</u>	<u>675</u>	21.5	638	19.5	705
481.wrf	120	92.9	119	93.9	<u>119</u>	<u>93.7</u>	120	92.9	119	93.9	<u>119</u>	<u>93.7</u>
482.sphinx3	355	54.9	351	55.6	<u>353</u>	<u>55.2</u>	355	54.9	351	55.6	<u>353</u>	<u>55.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Snoop Mode set to Home Snoop
 Virtualization Technology disabled
 System Profile set to Custom
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-ny5m Wed Jan 21 17:36:14 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 91.0

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECfp_base2006 = 87.1

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650L v3 @ 1.80GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

cache size : 30720 KB

From /proc/meminfo

MemTotal: 132186916 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 0

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12"

VERSION_ID="12"

PRETTY_NAME="SUSE Linux Enterprise Server 12"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12"

uname -a:

Linux linux-ny5m 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 21 10:32

SPEC is set to: /root/cpu2006-1.2

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda2 ext4 176G 11G 165G 6% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 91.0

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECfp_base2006 = 87.1

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 01/08/2015

Memory:

4x 002C00B3002C 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz

4x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 91.0

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECfp_base2006 = 87.1

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 91.0

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECfp_base2006 = 87.1

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 91.0

PowerEdge FC430 (Intel Xeon E5-2650L v3, 1.80 GHz)

SPECfp_base2006 = 87.1

CPU2006 license: 55

Test date: Jan-2015

Test sponsor: Dell Inc.

Hardware Availability: Apr-2015

Tested by: Dell Inc.

Software Availability: Apr-2015

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 21 18:22:58 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 April 2015.