



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECint®2006 = 60.7**

Lenovo System x3550 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECint\_base2006 = 58.7**

CPU2006 license: 9017


Test date: May-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

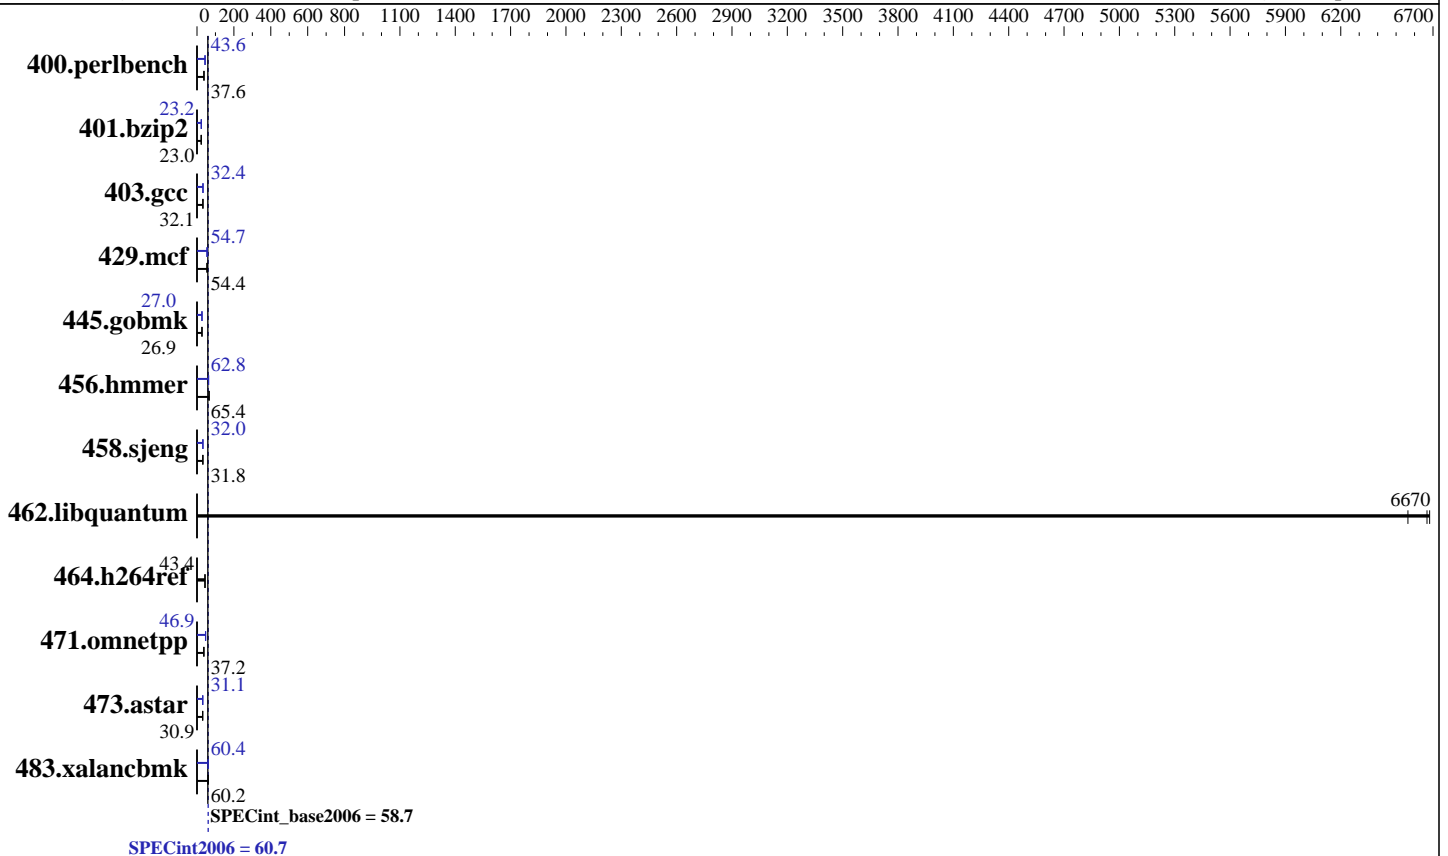

### Hardware

CPU Name: Intel Xeon E5-2695 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint2006 = **60.7**

Lenovo System x3550 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECint\_base2006 = **58.7**

CPU2006 license: 9017

Test date: May-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>260</b>	<b>37.6</b>	260	37.5	256	38.1	224	43.6	<b>224</b>	<b>43.6</b>	224	43.6
401.bzip2	423	22.8	420	23.0	<b>420</b>	<b>23.0</b>	<b>415</b>	<b>23.2</b>	415	23.2	415	23.2
403.gcc	251	32.1	251	32.0	<b>251</b>	<b>32.1</b>	<b>248</b>	<b>32.4</b>	248	32.4	248	32.5
429.mcf	167	54.7	<b>168</b>	<b>54.4</b>	168	54.4	169	54.1	166	55.0	<b>167</b>	<b>54.7</b>
445.gobmk	<b>389</b>	<b>26.9</b>	389	27.0	389	26.9	389	27.0	389	26.9	<b>389</b>	<b>27.0</b>
456.hammer	<b>143</b>	<b>65.4</b>	143	65.3	143	65.4	149	62.6	<b>149</b>	<b>62.8</b>	148	62.9
458.sjeng	<b>381</b>	<b>31.8</b>	380	31.8	381	31.7	378	32.0	378	32.0	<b>378</b>	<b>32.0</b>
462.libquantum	<b>3.11</b>	<b>6670</b>	3.10	6680	3.16	6560	<b>3.11</b>	<b>6670</b>	3.10	6680	3.16	6560
464.h264ref	512	43.3	<b>510</b>	<b>43.4</b>	509	43.5	512	43.3	<b>510</b>	<b>43.4</b>	509	43.5
471.omnetpp	167	37.5	169	36.9	<b>168</b>	<b>37.2</b>	133	47.0	<b>133</b>	<b>46.9</b>	136	46.0
473.astar	<b>228</b>	<b>30.9</b>	229	30.6	226	31.0	226	31.0	223	31.4	<b>226</b>	<b>31.1</b>
483.xalancbmk	115	60.2	114	60.5	<b>115</b>	<b>60.2</b>	<b>114</b>	<b>60.4</b>	114	60.3	114	60.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:

Operating Mode set to "Efficiency-Favor Performance"

Hyper-Threading set to "Disable"

Sysinfo program /home/SPEC/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on x3550m5.labs.lenovo.com Tue May 19 23:36:40 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2695 v3 @ 2.30GHz

2 "physical id"s (chips)

28 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint2006 = 60.7

Lenovo System x3550 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECint\_base2006 = 58.7

CPU2006 license: 9017

Test date: May-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes (Continued)

```

siblings : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB

```

From /proc/meminfo

```

MemTotal:      263448832 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"

```

os-release.rpmnew:

```

NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"

```

```

redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

```

uname -a:

```

Linux x3550m5.labs.lenovo.com 3.10.0-229.1.2.el7.x86_64 #1 SMP Fri Mar 6
17:12:08 EST 2015 x86_64 x86_64 x86_64 GNU/Linux

```

SPEC is set to: /home/SPEC

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   275G   29G  247G  11% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TBE105KUS-1.10]- 04/17/2015

Memory:

```

14x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
2x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
Continued on next page

```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint2006 = 60.7**

Lenovo System x3550 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECint\_base2006 = 58.7**

**CPU2006 license:** 9017

**Test date:** May-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Platform Notes (Continued)

8x NO DIMM Unknown

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"

OMP\_NUM\_THREADS = "28"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB  
memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 60.7

Lenovo System x3550 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECint\_base2006 = 58.7

CPU2006 license: 9017

Test date: May-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 60.7

Lenovo System x3550 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECint\_base2006 = 58.7

CPU2006 license: 9017

Test date: May-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

- 400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias
- 401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias
- 403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32
- 429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-opt-prefetch -auto-p32
- 445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias
- 456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias
- 458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4
- 462.libquantum: basepeak = yes
- 464.h264ref: basepeak = yes
- C++ benchmarks:
  - 471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap
  - 473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64
  - 483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3550 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECint2006 = 60.7**

**SPECint\_base2006 = 58.7**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** May-2015

**Hardware Availability:** Oct-2014

**Software Availability:** Sep-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 14 16:21:11 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 July 2015.