



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint®2006 = 58.3

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint_base2006 = 56.4

CPU2006 license: 13


Test date: Jan-2016

Test sponsor: Intel Corporation

Hardware Availability: May-2014

Tested by: Intel Corporation

Software Availability: Nov-2015

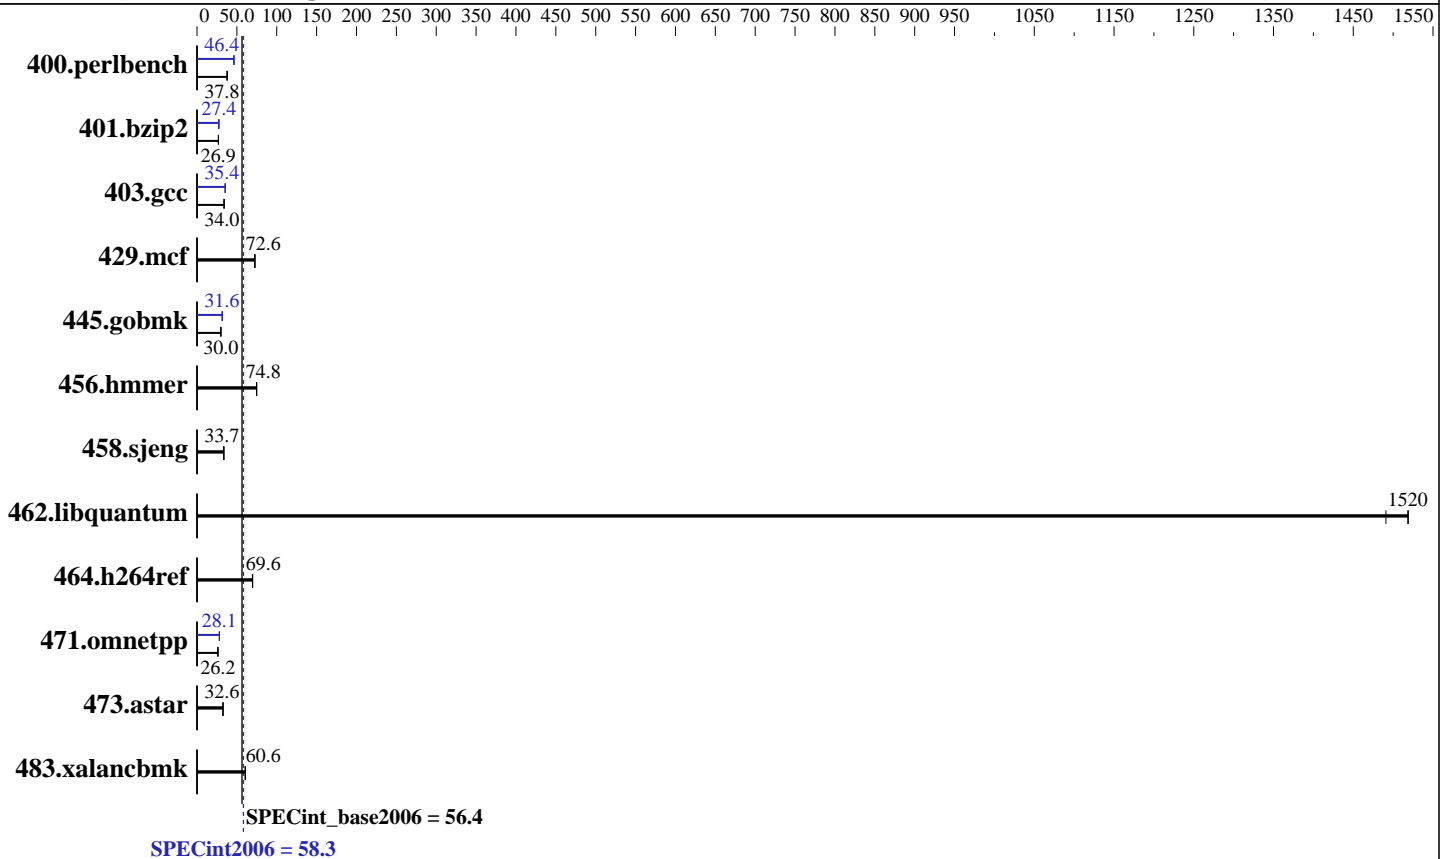

Hardware

CPU Name: Intel Core i5-4590
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-12800U-11)
 Disk Subsystem: 1 TB SATA, 72000 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 10 Pro
 10.0.10586 N/A Build 10586
 Compiler: C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows;
 Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 11.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 58.3

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint_base2006 = 56.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2016
Hardware Availability: May-2014
Software Availability: Nov-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	259	37.7	<u>258</u>	<u>37.8</u>	258	37.9	211	46.3	<u>211</u>	<u>46.4</u>	211	46.4
401.bzip2	359	26.9	360	26.8	<u>359</u>	<u>26.9</u>	<u>352</u>	<u>27.4</u>	352	27.4	353	27.3
403.gcc	<u>237</u>	<u>34.0</u>	237	33.9	237	34.0	228	35.3	227	35.4	<u>228</u>	<u>35.4</u>
429.mcf	126	72.4	126	72.7	<u>126</u>	<u>72.6</u>	126	72.4	126	72.7	<u>126</u>	<u>72.6</u>
445.gobmk	350	29.9	<u>350</u>	<u>30.0</u>	350	30.0	332	31.6	<u>332</u>	<u>31.6</u>	331	31.6
456.hammer	125	74.6	125	74.9	<u>125</u>	<u>74.8</u>	125	74.6	125	74.9	<u>125</u>	<u>74.8</u>
458.sjeng	360	33.6	<u>359</u>	<u>33.7</u>	359	33.7	360	33.6	<u>359</u>	<u>33.7</u>	359	33.7
462.libquantum	13.6	1520	<u>13.6</u>	<u>1520</u>	13.9	1490	13.6	1520	<u>13.6</u>	<u>1520</u>	13.9	1490
464.h264ref	317	69.9	319	69.5	<u>318</u>	<u>69.6</u>	317	69.9	319	69.5	<u>318</u>	<u>69.6</u>
471.omnetpp	<u>238</u>	<u>26.2</u>	238	26.3	238	26.2	<u>223</u>	<u>28.1</u>	223	28.0	222	28.1
473.astar	215	32.6	<u>215</u>	<u>32.6</u>	215	32.6	215	32.6	<u>215</u>	<u>32.6</u>	215	32.6
483.xalancbmk	<u>114</u>	<u>60.6</u>	114	60.7	114	60.4	<u>114</u>	<u>60.6</u>	114	60.7	114	60.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 16.0 was set up to generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r) Parallel Studio XE 2016 program folder)

Platform Notes

Sysinfo program C:\SPEC16.0\Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt10C37B4DEDF8 Fri Jan 8 17:18:57 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 10 Pro
OS Version    : 10.0.10586 N/A Build 10586
System Manufacturer: ASUS
System Model   : All Series
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3301 Mhz
BIOS Version  : American Megatrends Inc. 2602, 12/4/2015
Total Physical Memory: 8,070 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 58.3

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint_base2006 = 56.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2016
Hardware Availability: May-2014
Software Availability: Nov-2015

Platform Notes (Continued)

L2CacheSize : 1024
L3CacheSize : 6144
MaxClockSpeed : 3301
Name : Intel(R) Core(TM) i5-4590 CPU @ 3.30GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
+ 64GB memory using Windows 8.1 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Base Portability Flags

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword -DWIN64



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 58.3

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint_base2006 = 56.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2016
Hardware Availability: May-2014
Software Availability: Nov-2015

Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F64000000

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F64000000 shlw64M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc12 -Qstd=c99

C++ benchmarks:

icl -Qvc12

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F64000000 shlw64M.lib
/F256000000 -link /FORCE:MULTIPLE

401.bzip2: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
-Qauto-ilp32 /F64000000

403.gcc: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F64000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 58.3

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint_base2006 = 56.4

CPU2006 license: 13

Test date: Jan-2016

Test sponsor: Intel Corporation

Hardware Availability: May-2014

Tested by: Intel Corporation

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F64000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F64000000
shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 58.3

ASUS H97M-PLUS Motherboard (Intel Core i5-4590)

SPECint_base2006 = 56.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2016

Hardware Availability: May-2014

Software Availability: Nov-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 6 16:55:19 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 September 2016.