



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 127

Express5800/R110i-1 (Intel Pentium G4560)

SPECint_rate_base2006 = 122

CPU2006 license: 9006


Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

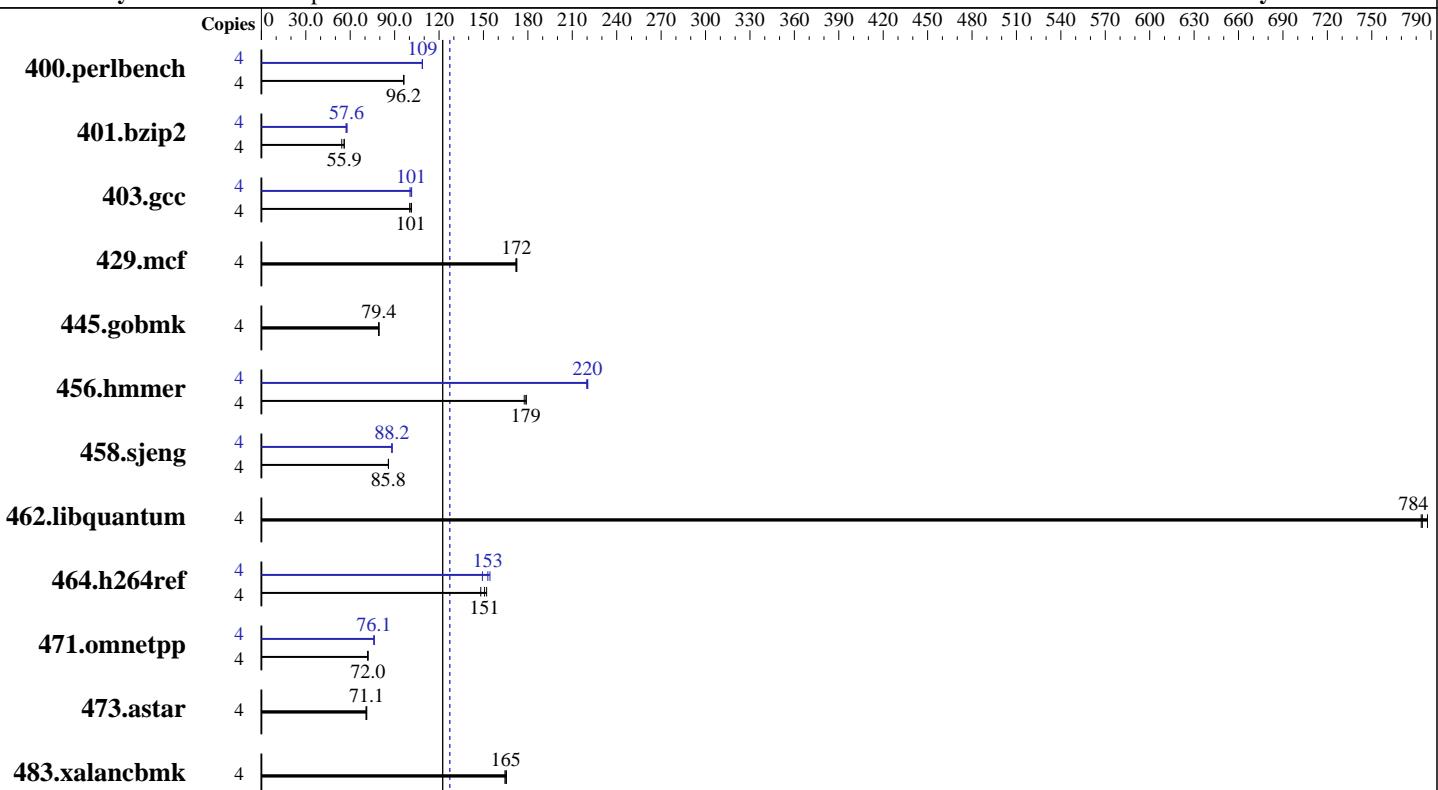

SPECint_rate_base2006 = 122

SPECint_rate2006 = 127

Hardware

CPU Name: Intel Pentium G4560
CPU Characteristics:
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E)
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
Compiler: Kernel 3.10.0-514.6.1.el7.x86_64
C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110i-1 (Intel Pentium G4560)

SPECint_rate2006 = 127

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	406	96.1	406	96.2	406	96.2	4	359	109	359	109	360	109
401.bzip2	4	690	55.9	690	55.9	711	54.3	4	667	57.8	675	57.2	670	57.6
403.gcc	4	322	100	317	101	319	101	4	317	102	318	101	321	100
429.mcf	4	212	172	212	172	211	173	4	212	172	212	172	211	173
445.gobmk	4	529	79.3	529	79.4	529	79.4	4	529	79.3	529	79.4	529	79.4
456.hmmer	4	210	178	209	179	209	179	4	169	220	170	220	169	220
458.sjeng	4	564	85.8	564	85.8	564	85.8	4	548	88.3	548	88.2	549	88.1
462.libquantum	4	106	783	106	784	105	788	4	106	783	106	784	105	788
464.h264ref	4	582	152	597	148	587	151	4	573	154	593	149	579	153
471.omnetpp	4	347	72.0	347	72.1	348	71.8	4	329	76.1	328	76.2	329	76.0
473.astar	4	397	70.6	395	71.1	395	71.1	4	397	70.6	395	71.1	395	71.1
483.xalancbmk	4	167	165	168	164	167	166	4	167	165	168	164	167	166

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Power Management Policy: Custom
Energy Performance: Performance
DCU Streamer Prefetcher: Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110i-1 (Intel Pentium G4560)

SPECint_rate2006 = 127

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmr: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110i-1 (Intel Pentium G4560)

SPECint_rate2006 = 127

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-D_FILE_OFFSET_BITS=64`

429.mcf: `-D_FILE_OFFSET_BITS=64`

445.gobmk: `-D_FILE_OFFSET_BITS=64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

464.h264ref: `-D_FILE_OFFSET_BITS=64`

471.omnetpp: `-D_FILE_OFFSET_BITS=64`

473.astar: `-D_FILE_OFFSET_BITS=64`

483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)`
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3`

401.bzip2: `-prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)`
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`
`-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32`
`-qopt-mem-layout-trans=3`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3`

429.mcf: `basepeak = yes`

445.gobmk: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110i-1 (Intel Pentium G4560)

SPECint_rate2006 = 127

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

Peak Optimization Flags (Continued)

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -auto-ilp32
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
-qopt-ra-region-strategy=block
-qopt-mem-layout-trans=3 -Wl,-z,muldefs
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 127

Express5800/R110i-1 (Intel Pentium G4560)

SPECint_rate_base2006 = 122

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 30 15:31:38 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 May 2017.