



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 120

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

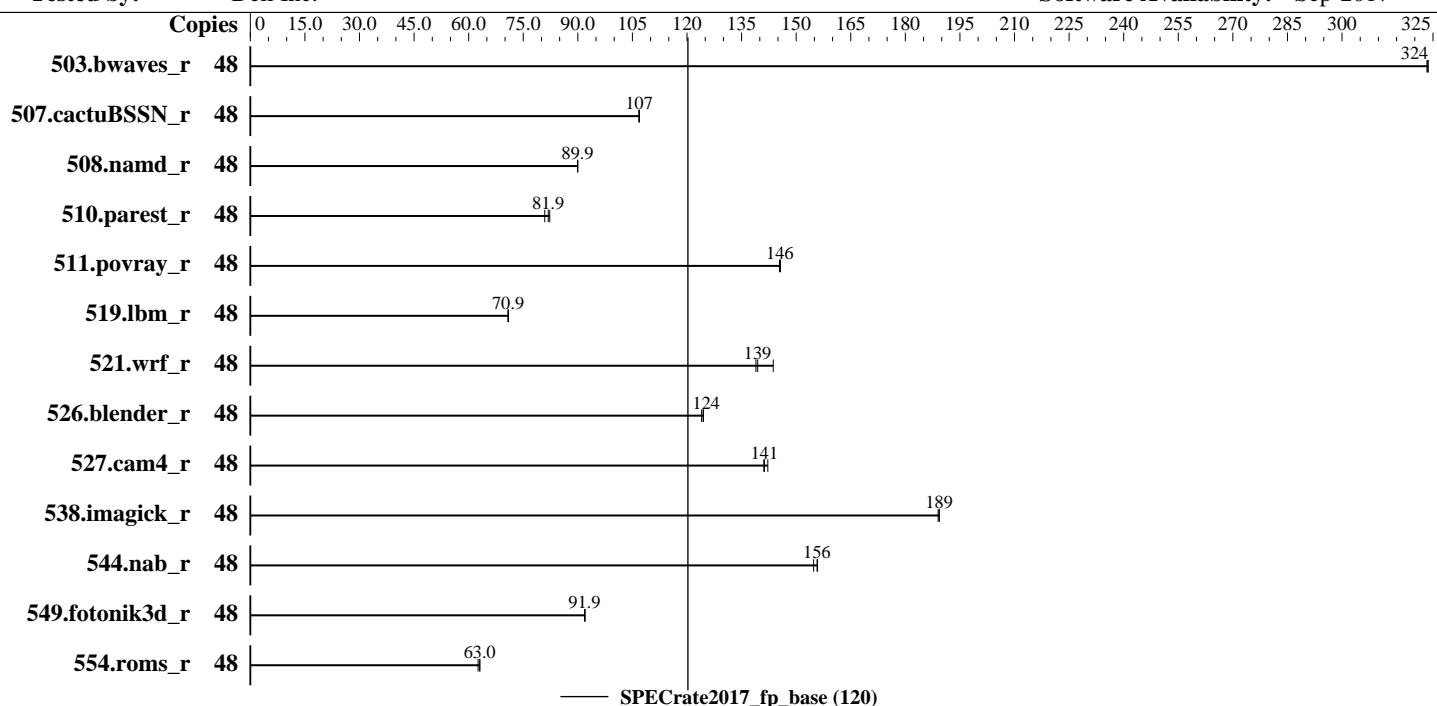

SPECrate2017_fp_base (120)

Hardware

CPU Name: Intel Xeon Gold 6126
 Max MHz.: 3700
 Nominal: 2600
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 19.25 MB I+D on chip per chip
 Other: None
 Memory: 176 GB (11 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 480GB SATA SSD
 Other: None

Software

OS: CentOS Linux release 7.4.1708 (Core)
 3.10.0-693.5.2.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 1.0.8 released Jul-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 120

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|------------------|--------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 48 | <u>1488</u> | <u>324</u> | 1487 | 324 | 1489 | 323 | | | | | | | |
| 507.cactusBSSN_r | 48 | 568 | 107 | <u>569</u> | <u>107</u> | 569 | 107 | | | | | | | |
| 508.namd_r | 48 | 507 | 90.0 | <u>507</u> | <u>89.9</u> | 507 | 89.9 | | | | | | | |
| 510.parest_r | 48 | <u>1534</u> | <u>81.9</u> | 1526 | 82.3 | 1552 | 80.9 | | | | | | | |
| 511.povray_r | 48 | 769 | 146 | 771 | 145 | <u>770</u> | <u>146</u> | | | | | | | |
| 519.lbm_r | 48 | 714 | 70.8 | <u>714</u> | <u>70.9</u> | 713 | 70.9 | | | | | | | |
| 521.wrf_r | 48 | <u>771</u> | <u>139</u> | 748 | 144 | 774 | 139 | | | | | | | |
| 526.blender_r | 48 | <u>588</u> | <u>124</u> | 590 | 124 | 587 | 125 | | | | | | | |
| 527.cam4_r | 48 | 595 | 141 | <u>594</u> | <u>141</u> | 590 | 142 | | | | | | | |
| 538.imagick_r | 48 | <u>631</u> | <u>189</u> | 632 | 189 | 631 | 189 | | | | | | | |
| 544.nab_r | 48 | 522 | 155 | 518 | 156 | <u>519</u> | <u>156</u> | | | | | | | |
| 549.fotonik3d_r | 48 | 2033 | 92.0 | <u>2036</u> | <u>91.9</u> | 2036 | 91.9 | | | | | | | |
| 554.roms_r | 48 | 1209 | 63.1 | 1219 | 62.6 | <u>1210</u> | <u>63.0</u> | | | | | | | |

SPECrate2017_fp_base = 120

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_fp_base = 120

PowerEdge C6420 (Intel Xeon Gold 6126, 2.60 GHz)

SPECCrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

General Notes (Continued)

is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

C States disabled

Memory Patrol Scrub disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Tue Nov 28 04:57:02 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 120

PowerEdge C6420 (Intel Xeon Gold 6126, 2.60 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```
siblings : 24
physical 0: cores 0 1 3 4 5 6 8 9 10 11 12 13
physical 1: cores 1 2 3 4 5 6 8 9 10 11 12 13
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
Stepping:              4
CPU MHz:               2600.000
BogoMIPS:              5200.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              19712K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                       aperfmpfperf eagerfpu pnpi pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
                       cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                       xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt
                       tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                       erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb
                       avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occu_llc
                       cqmq_mbm_total cqmq_mbm_local dtherm arat pln pts
```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 120

PowerEdge C6420 (Intel Xeon Gold 6126, 2.60 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 47813 MB
node 0 free: 46356 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 32768 MB
node 1 free: 31780 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 49152 MB
node 2 free: 47637 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 49152 MB
node 3 free: 47752 MB
node distances:
node 0 1 2 3
 0: 10 21 11 21
 1: 21 10 21 11
 2: 11 21 10 21
 3: 21 11 21 10
```

From /proc/meminfo

```
MemTotal: 180174456 kB
HugePages_Total: 128
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 7.4.1708 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.4 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.4.1708 (Core)
system-release: CentOS Linux release 7.4.1708 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

uname -a:

```
Linux localhost.localdomain 3.10.0-693.5.2.el7.x86_64 #1 SMP Fri Oct 20 20:32:50 UTC
2017 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 27 23:31

SPEC is set to: /root/cpu2017

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 120

PowerEdge C6420 (Intel Xeon Gold 6126, 2.60 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda2 | xfs | 433G | 18G | 416G | 5% | / |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.8 07/12/2017

Memory:

11x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

5x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(base) 526.blender_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
FC 507.cactuBSSN_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_fp_base = 120

PowerEdge C6420 (Intel Xeon Gold 6126, 2.60 GHz)

SPECCrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 120

PowerEdge C6420 (Intel Xeon Gold 6126, 2.60 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Base Portability Flags (Continued)

```
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017_fp_base = 120

PowerEdge C6420 (Intel Xeon Gold 6126, 2.60 GHz)

SPECCrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-28 05:57:01-0500.

Report generated on 2018-10-31 16:19:51 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.