



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NS5162M5 (Intel Xeon Gold 5117)

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Jun-2019

Hardware Availability: Aug-2018

Software Availability: Mar-2018

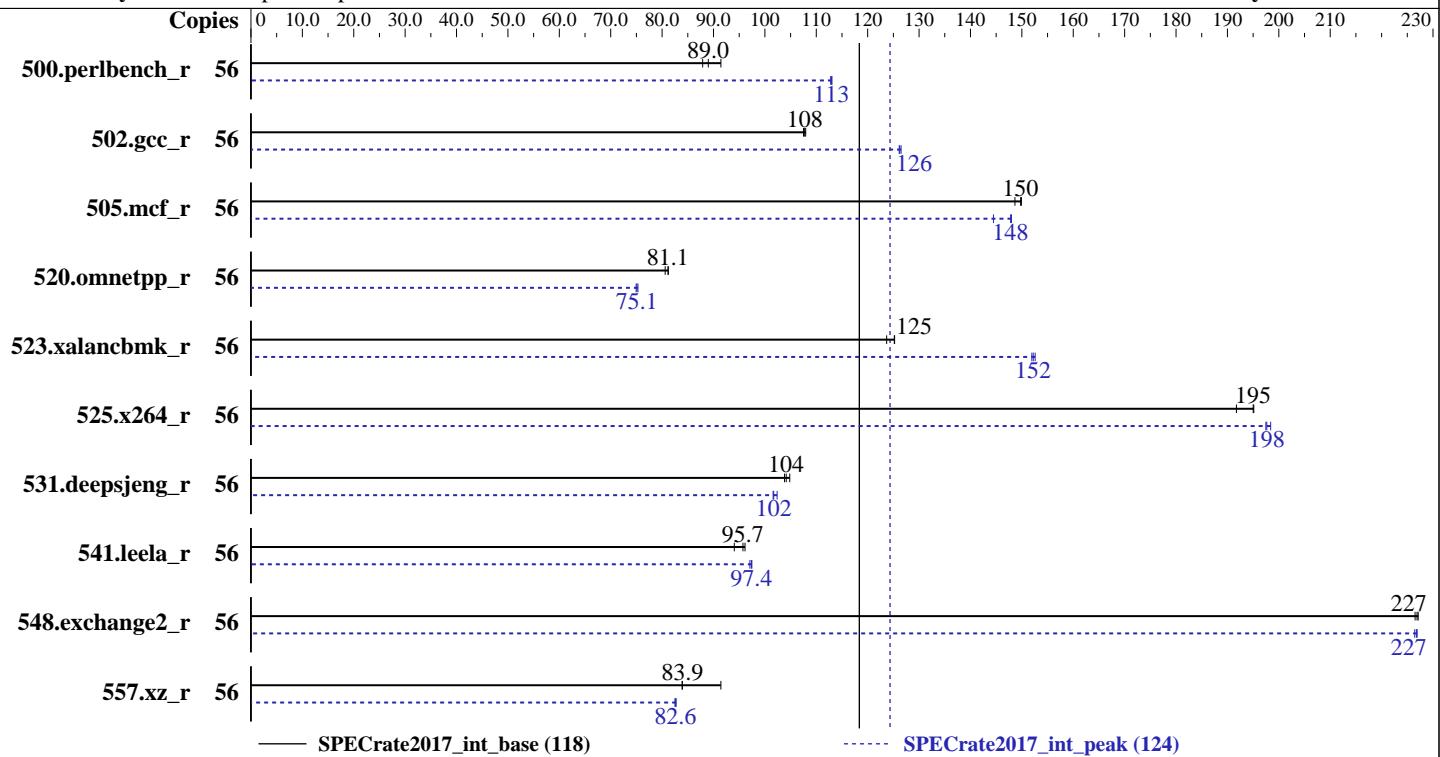

— SPECrate2017_int_base (118)

--- SPECrate2017_int_peak (124)

Hardware

CPU Name: Intel Xeon Gold 5117
Max MHz.: 2800
Nominal: 2000
Enabled: 28 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 19.25 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version 4.0.1 released Aug-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	56	975	91.4	1002	89.0	1014	87.9	56	789	113	789	113	790	113
502.gcc_r	56	735	108	736	108	738	108	56	627	127	628	126	629	126
505.mcf_r	56	604	150	609	149	604	150	56	626	144	612	148	612	148
520.omnetpp_r	56	905	81.1	912	80.6	905	81.2	56	980	74.9	976	75.3	978	75.1
523.xalancbmk_r	56	472	125	472	125	478	124	56	388	152	389	152	388	153
525.x264_r	56	503	195	511	192	503	195	56	497	197	494	198	496	198
531.deepsjeng_r	56	612	105	616	104	618	104	56	632	102	627	102	631	102
541.leela_r	56	986	94.1	965	96.1	969	95.7	56	955	97.1	951	97.5	952	97.4
548.exchange2_r	56	648	227	647	227	646	227	56	647	227	648	226	647	227
557.xz_r	56	661	91.4	720	83.9	721	83.9	56	731	82.7	733	82.5	732	82.6

SPECrate2017_int_base = 118

SPECrate2017_int_peak = 124

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/CPU2017/lib/ia32:/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-32:/home/CPU2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

General Notes (Continued)

jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS and OS configuration:
SCALING_GOVERNOR set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
C1E Support set to Disable
IMC (Integrated memory controller) Interleaving set to 1-way
Sub NUMA Cluster (SNC) set to Enable
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-q537 Thu Jun 13 12:24:52 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 14
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	56
On-line CPU(s) list:	0-55
Thread(s) per core:	2
Core(s) per socket:	14
Socket(s):	2
NUMA node(s):	4
Vendor ID:	GenuineIntel

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz
Stepping: 4
CPU MHz: 1766.704
CPU max MHz: 2800.0000
CPU min MHz: 800.0000
BogoMIPS: 3990.64
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-3,7-9,28-31,35-37
NUMA node1 CPU(s): 4-6,10-13,32-34,38-41
NUMA node2 CPU(s): 14-17,21-23,42-45,49-51
NUMA node3 CPU(s): 18-20,24-27,46-48,52-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

/proc/cpuinfo cache data
cache size : 19712 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 28 29 30 31 35 36 37
node 0 size: 95271 MB
node 0 free: 95056 MB
node 1 cpus: 4 5 6 10 11 12 13 32 33 34 38 39 40 41
node 1 size: 96760 MB
node 1 free: 96519 MB
node 2 cpus: 14 15 16 17 21 22 23 42 43 44 45 49 50 51
node 2 size: 96760 MB
node 2 free: 96548 MB
node 3 cpus: 18 19 20 24 25 26 27 46 47 48 52 53 54 55
node 3 size: 96624 MB
node 3 free: 96352 MB
node distances:
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

```
node   0   1   2   3
 0: 10  11  21  21
 1: 11  10  21  21
 2: 21  21  10  11
 3: 21  21  11  10
```

```
From /proc/meminfo
  MemTotal:      394666372 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
  SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
  os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
  Linux linux-q537 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
  x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):           Mitigation: PTI
CVE-2017-5753 (Spectre variant 1):  Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):  Mitigation: IBRS+IBPB
```

```
run-level 3 Jun 13 12:24 last=5
```

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	407G	64G	344G	16%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Platform Notes (Continued)

this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Inspur 4.0.1 08/30/2018

Memory:

4x NO DIMM NO DIMM

12x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

=====

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 500.perlbench_r(peak) 502.gcc_r(peak)

=====

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

FC 548.exchange2_r(base, peak)

=====

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-L/usr/local/jet5.0.1-64/lib -ljemalloc

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECCrate2017_int_base = 118

Inspur NS5162M5 (Intel Xeon Gold 5117)

SPECCrate2017_int_peak = 124

CPU2017 License: 3358

Test Date: Jun-2019

Test Sponsor: Inspur Corporation

Hardware Availability: Aug-2018

Tested by: Inspur Corporation

Software Availability: Mar-2018

Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-06-13 12:24:51-0400.

Report generated on 2019-07-09 15:46:48 by CPU2017 PDF formatter v6067.

Originally published on 2019-07-09.