



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

**SPECSpeed®2017\_fp\_base = 124**

**SPECSpeed®2017\_fp\_peak = 125**

CPU2017 License: 9016


**Test Date:** Jul-2019

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Apr-2019

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** May-2019

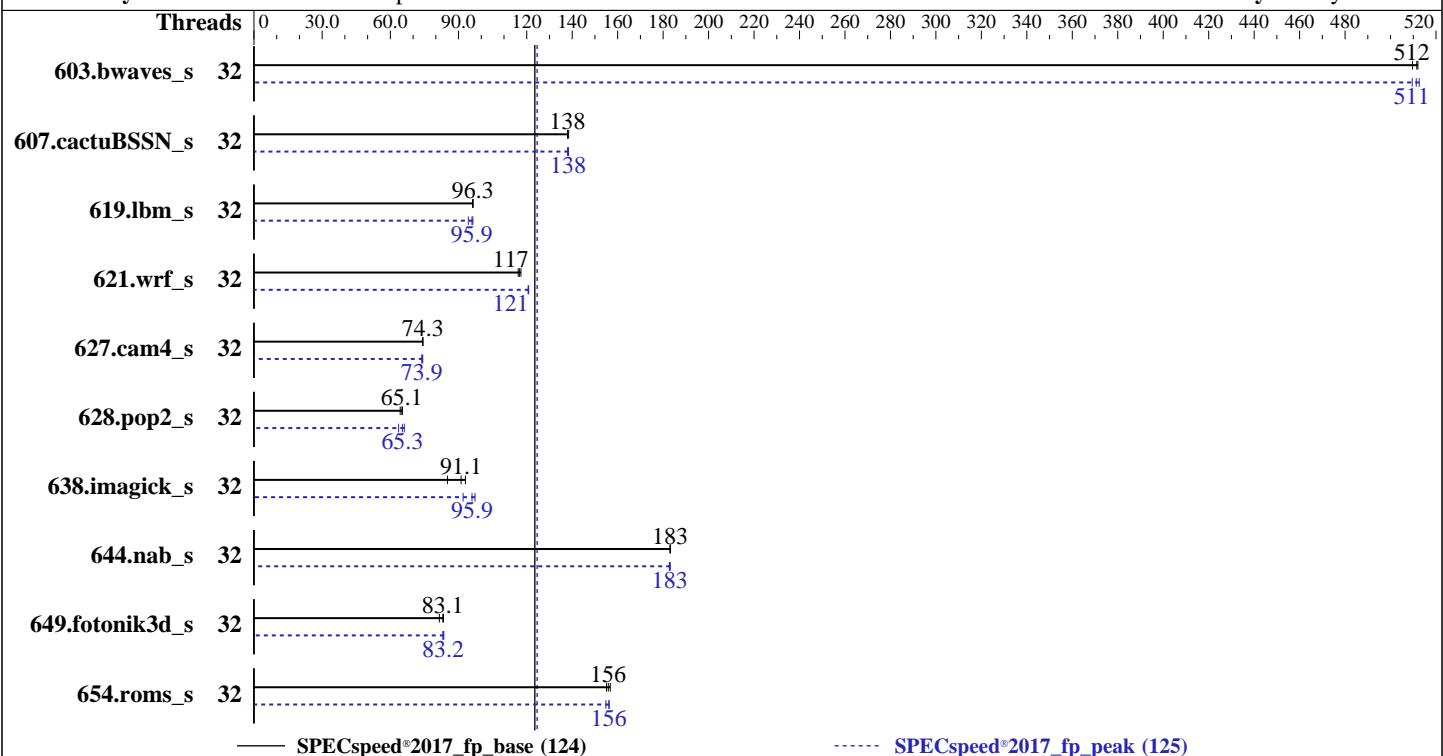

### Hardware

CPU Name: Intel Xeon Gold 5218  
Max MHz: 3900  
Nominal: 2300  
Enabled: 32 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)  
Storage: 1 x 1 TB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
Compiler: Kernel 4.12.14-23-default  
Parallel: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
Firmware: Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
File System: Yes  
System State: Version 5102 released Feb-2019  
Base Pointers: xfs  
Peak Pointers: Run level 3 (multi-user)  
Other: 64-bit  
Power Management: Peak Pointers: 64-bit  
Other: None  
Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

**SPECSpeed®2017\_fp\_base = 124**

**SPECSpeed®2017\_fp\_peak = 125**

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	115	512	<u>115</u>	<u>512</u>	116	510	32	<u>115</u>	<u>511</u>	115	513	116	510
607.cactuBSSN_s	32	120	138	121	138	<u>121</u>	<u>138</u>	32	<u>121</u>	<u>138</u>	121	138	121	138
619.lbm_s	32	54.4	96.2	54.4	96.4	<u>54.4</u>	<u>96.3</u>	32	<u>54.6</u>	<u>95.9</u>	54.4	96.3	<u>55.5</u>	94.3
621.wrf_s	32	114	116	<u>113</u>	<u>117</u>	113	117	32	110	121	109	121	<u>110</u>	<u>121</u>
627.cam4_s	32	119	74.3	<u>119</u>	<u>74.3</u>	119	74.2	32	120	73.9	<u>120</u>	<u>73.9</u>	119	74.3
628.pop2_s	32	182	65.3	<u>182</u>	<u>65.1</u>	185	64.3	32	187	63.6	180	66.1	<u>182</u>	<u>65.3</u>
638.imagick_s	32	169	85.2	155	93.0	<u>158</u>	<u>91.1</u>	32	157	92.0	148	97.3	<u>150</u>	<u>95.9</u>
644.nab_s	32	95.4	183	<u>95.4</u>	<u>183</u>	95.4	183	32	95.4	183	<u>95.5</u>	<u>183</u>	95.6	183
649.fotonik3d_s	32	112	81.6	109	83.4	<u>110</u>	<u>83.1</u>	32	109	83.5	<u>110</u>	<u>83.2</u>	110	83.2
654.roms_s	32	100	157	102	155	<u>101</u>	<u>156</u>	32	<u>101</u>	<u>156</u>	102	155	101	156
SPECSpeed®2017_fp_base = 124							SPECSpeed®2017_fp_peak = 125							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec2017\_19u4/lib/intel64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

HyperThreading = Disabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

**SPECSpeed®2017\_fp\_base = 124**

**SPECSpeed®2017\_fp\_peak = 125**

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Platform Notes (Continued)

ENERGY\_PERF\_BIAS\_CFG mode = performance

CSM Support = Disabled

Engine Boost = Level3(Max)

LLC dead line allc = Disabled

SR-IOV Support = Disabled

Sysinfo program /spec2017\_19u4/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-gh78 Tue Jul 2 04:22:15 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings : 16
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   1
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz
Stepping:               6
CPU MHz:                2300.000
CPU max MHz:            3900.0000
CPU min MHz:            1000.0000
BogoMIPS:                4600.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 125**

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Platform Notes (Continued)

L3 cache: 22528K  
NUMA node0 CPU(s): 0-15  
NUMA node1 CPU(s): 16-31  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperf mperf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 cdp\_l3 invpcid\_single mba tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local ibpb ibrs stibp dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni arch\_capabilities ssbd

/proc/cpuinfo cache data  
cache size : 22528 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
node 0 size: 385549 MB  
node 0 free: 376639 MB  
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31  
node 1 size: 387022 MB  
node 1 free: 386449 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 791113864 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="SLES"  
VERSION="15"  
VERSION\_ID="15"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 125

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Platform Notes (Continued)

CPE\_NAME="cpe:/o:suse:sles:15"

uname -a:

```
Linux linux-gh78 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Jul 1 17:33

SPEC is set to: /spec2017\_19u4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	929G	21G	908G	3%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 5102 02/11/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
           | 644.nab_s(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 125

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

**SPECspeed®2017\_fp\_base = 124**

**SPECspeed®2017\_fp\_peak = 125**

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

SPECspeed®2017\_fp\_base = 124

SPECspeed®2017\_fp\_peak = 125

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

603.bwaves\_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: -DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

621.wrf\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

627.cam4\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

628.pop2\_s: Same as 621.wrf\_s

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS ESC8000 G4(Z11PG-D24) Server System  
(2.30 GHz, Intel Xeon Gold 5218)

SPECSpeed®2017\_fp\_base = 124

SPECSpeed®2017\_fp\_peak = 125

CPU2017 License: 9016

Test Date: Jul-2019

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Apr-2019

Tested by: ASUSTeK Computer Inc.

Software Availability: May-2019

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-07-01 16:22:14-0400.

Report generated on 2020-12-31 14:11:35 by CPU2017 PDF formatter v6255.

Originally published on 2019-08-06.