



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

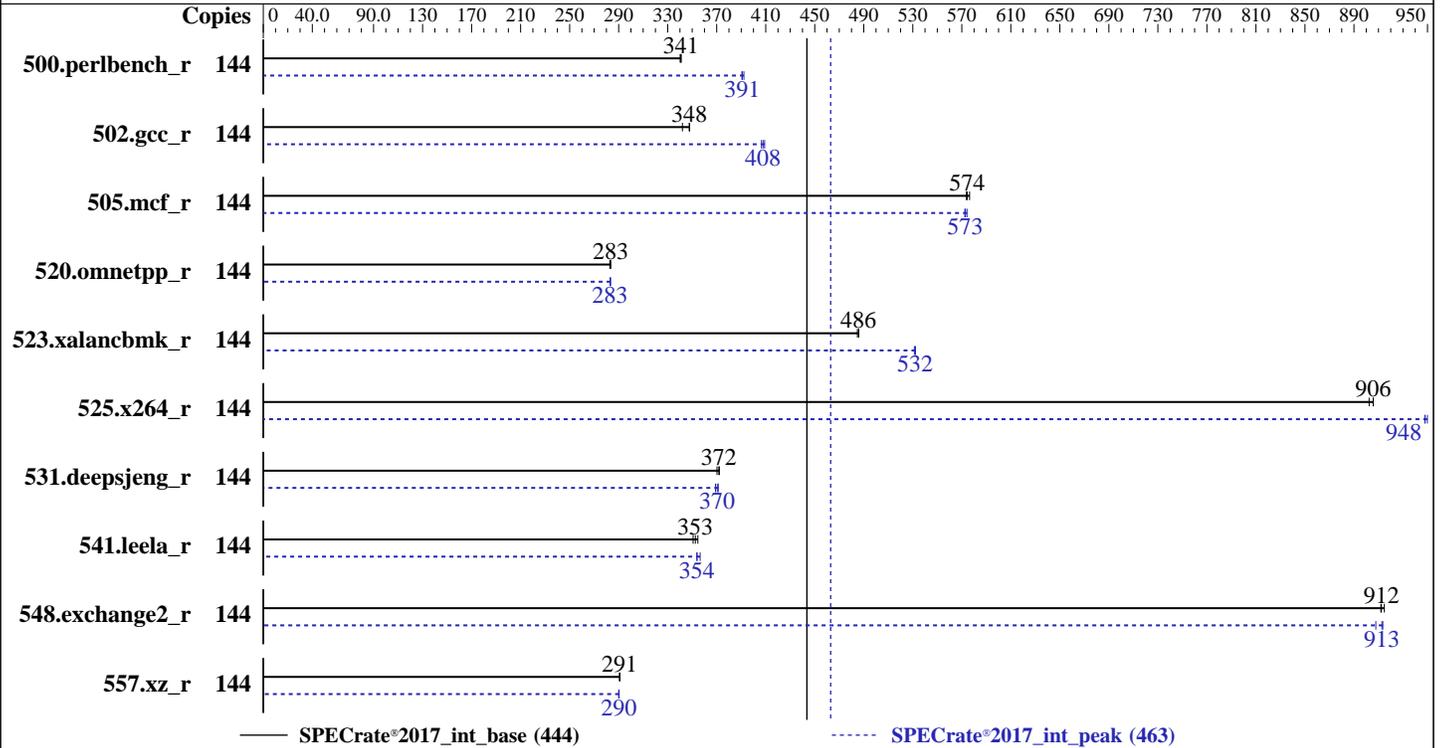

Hardware

CPU Name: Intel Xeon Gold 6240M
 Max MHz: 3900
 Nominal: 2600
 Enabled: 72 cores, 4 chips, 2 threads/core
 Orderable: 2,4 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933V-R)
 Storage: 1 x 960 GB SSD SAS
 Other: None

Software

OS: SUSE Linux Enterprise Desktop 15 (x86_64) 4.12.14-23-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 4.0.4i released Aug-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	144	673	341	672	341	674	340	144	585	392	587	391	587	391		
502.gcc_r	144	586	348	596	342	587	348	144	498	409	502	406	500	408		
505.mcf_r	144	404	576	406	574	405	574	144	405	574	407	572	406	573		
520.omnetpp_r	144	667	283	668	283	667	283	144	668	283	667	283	668	283		
523.xalancbmk_r	144	313	486	314	485	313	486	144	286	532	286	532	286	531		
525.x264_r	144	278	906	278	906	279	902	144	266	948	265	950	266	948		
531.deepsjeng_r	144	443	372	446	370	444	372	144	445	370	444	371	447	369		
541.leela_r	144	672	355	680	351	676	353	144	669	356	674	354	674	354		
548.exchange2_r	144	414	912	412	915	413	912	144	413	913	416	908	413	914		
557.xz_r	144	535	291	534	291	535	291	144	536	290	536	290	536	290		

SPECrate®2017_int_base = **444**

SPECrate®2017_int_peak = **463**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-3zzh Tue Dec 17 12:44:42 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6240M CPU @ 2.60GHz
```

```
4 "physical id"s (chips)
```

```
144 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
```

```
siblings : 36
```

```
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

```
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

```
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

```
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 144

On-line CPU(s) list: 0-143

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Dec-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 18
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6240M CPU @ 2.60GHz
Stepping: 7
CPU MHz: 2600.000
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
NUMA node4 CPU(s): 36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
NUMA node5 CPU(s): 39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
NUMA node6 CPU(s): 54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
NUMA node7 CPU(s): 57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni arch_capabilities ssbd

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
node 0 size: 192095 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Platform Notes (Continued)

```

node 0 free: 191806 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
node 1 size: 193527 MB
node 1 free: 193328 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
node 2 size: 193527 MB
node 2 free: 193373 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
node 3 size: 193527 MB
node 3 free: 193370 MB
node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
node 4 size: 193527 MB
node 4 free: 193333 MB
node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
node 5 size: 193527 MB
node 5 free: 193300 MB
node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
node 6 size: 193527 MB
node 6 free: 193369 MB
node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
node 7 size: 193495 MB
node 7 free: 193214 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      1583877236 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="SLED"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Desktop 15"
ID="sled"
ID_LIKE="suse"
ANSI_COLOR="0;32"

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Platform Notes (Continued)

CPE_NAME="cpe:/o:suse:sled:15"

uname -a:

```
Linux linux-3zzh 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	No status reported
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Dec 17 12:41

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	893G	9.9G	882G	2%	/home

From /sys/devices/virtual/dmi/id

```
BIOS: Cisco Systems, Inc. C480M5.4.0.4i.0.0831191123 08/31/2019
Vendor: Cisco Systems Inc
Product: UCSC-C480-M5
Serial: FCH2243W038
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Compiler Version Notes (Continued)

```
=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 502.gcc_r(peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 523.xalanbmk_r(peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 523.xalanbmk_r(peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate[®]2017_int_base = 444

SPECrate[®]2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r
```

C++ benchmarks:

```
520.omnetpp_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6240M, 2.60GHz)

SPECrate®2017_int_base = 444

SPECrate®2017_int_peak = 463

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-w1, -z, muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-17 02:14:42-0500.

Report generated on 2020-01-15 15:47:57 by CPU2017 PDF formatter v6255.

Originally published on 2020-01-15.