



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation


NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

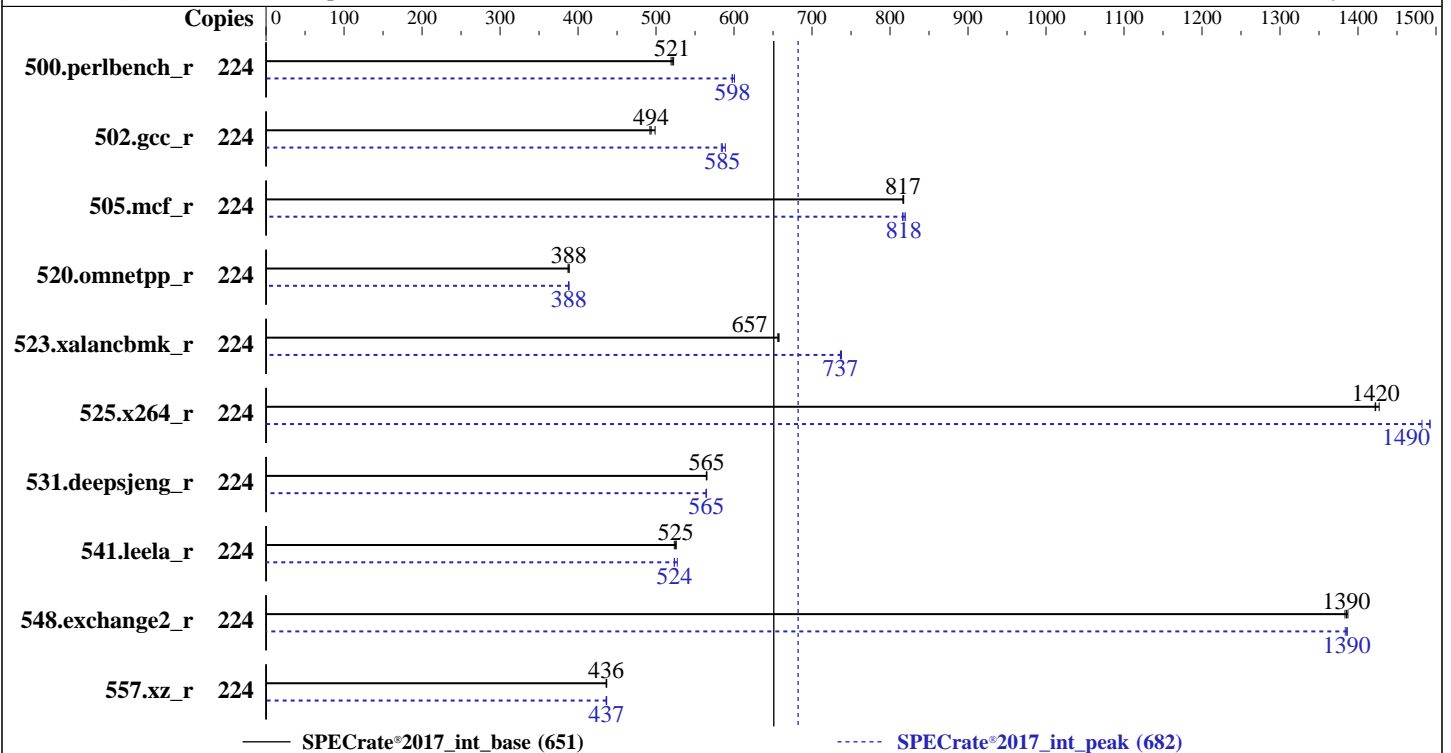

Hardware

CPU Name: Intel Xeon Platinum 8280M
Max MHz: 4000
Nominal: 2700
Enabled: 112 cores, 4 chips, 2 threads/core
Orderable: 2,3,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 38.5 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 800 GB tmpfs
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)
Kernel 3.10.0-957.10.1.el7.x86_64
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel: No
Firmware: NEC BIOS Version 5.7.0210 08/27/2019 released Oct-2019
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	687	519	685	<u>521</u>	682	523	224	597	598	594	601	596	<u>598</u>
502.gcc_r	224	644	492	642	<u>494</u>	636	499	224	539	589	543	584	542	<u>585</u>
505.mcf_r	224	443	<u>817</u>	443	818	443	817	224	443	<u>818</u>	444	816	442	820
520.omnetpp_r	224	756	389	757	<u>388</u>	759	387	224	757	388	757	<u>388</u>	758	388
523.xalancbmk_r	224	360	656	360	<u>657</u>	360	658	224	321	738	321	<u>737</u>	321	736
525.x264_r	224	276	1420	275	1430	276	<u>1420</u>	224	263	<u>1490</u>	265	1480	263	1490
531.deepsjeng_r	224	454	565	455	564	454	<u>565</u>	224	455	565	455	564	455	<u>565</u>
541.leela_r	224	705	526	709	523	706	<u>525</u>	224	704	527	709	<u>524</u>	709	523
548.exchange2_r	224	424	<u>1390</u>	423	1390	424	1380	224	424	<u>1390</u>	424	1380	423	1390
557.xz_r	224	555	<u>436</u>	554	437	555	436	224	554	437	554	<u>437</u>	555	436

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
cpupower -c all frequency-set -g performance
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Set Kernel Boot Parameter : nohz_full=1-31
irqbalance disabled with "service irqbalance stop"
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 1000000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/SPEC/lib/intel64:/home/SPEC/lib/ia32:/home/SPEC/je5.0.1-32"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:
Memory RAS Mode: SDDC mode
VT-x : Disabled
Processor C6 Report : Disabled
OS Performance Tuning : Disabled
Energy Performance : Performance
Patrol Scrub : Disabled
DCU Streamer Prefetcher : Disabled
Memory P.E. Retry : Disabled
Sub NUMA Clustering : Enabled
Turbo Boost : Enabled

Sysinfo program /home/SPEC/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Mon Jan 27 23:29:23 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280M CPU @ 2.70GHz
4 "physical id"s (chips)
224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 28
siblings  : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 224
On-line CPU(s) list:   0-223
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8280M CPU @ 2.70GHz
Stepping:               7
CPU MHz:                2701.000
CPU max MHz:            2701.0000
CPU min MHz:            1000.0000
BogoMIPS:                5400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                39424K
NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cxl6 xtrp pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt ssbd mba
ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni spec_ctrl intel_stibp flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
129 133 134 135
node 0 size: 195208 MB
node 0 free: 190340 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
132 136 137 138 139
node 1 size: 196608 MB
node 1 free: 191360 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
155 156 157 161 162 163
node 2 size: 196608 MB
node 2 free: 192115 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 3 size: 196608 MB
node 3 free: 190914 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
183 184 185 189 190 191
node 4 size: 196608 MB
node 4 free: 192178 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
187 188 192 193 194 195
node 5 size: 196608 MB
node 5 free: 190502 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
210 211 212 213 217 218 219
node 6 size: 196608 MB
node 6 free: 192134 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
209 214 215 216 220 221 222 223
node 7 size: 196608 MB
node 7 free: 191575 MB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

```
node distances:
node   0   1   2   3   4   5   6   7
  0:  10  11  15  15  15  15  15  15
  1:  11  10  15  15  15  15  15  15
  2:  15  15  10  11  15  15  15  15
  3:  15  15  11  10  15  15  15  15
  4:  15  15  15  15  10  11  15  15
  5:  15  15  15  15  11  10  15  15
  6:  15  15  15  15  15  15  10  11
  7:  15  15  15  15  15  15  11  10
```

```
From /proc/meminfo
MemTotal:      1583652948 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-957.10.1.el7.x86_64 #1 SMP Thu Feb 7 07:12:53 UTC
2019 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS
```

run-level 3 Jan 27 23:18

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Platform Notes (Continued)

SPEC is set to: /home/SPEC

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	800G	4.2G	796G	1%	/home

From /sys/devices/virtual/dmi/id

BIOS: American Megatrends Inc. 5.7.0210 08/27/2019
Vendor: NEC
Product: NX7700x/A5012M-4 v2 [NE3400-401Y]
Serial: 7800115

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 523.xalancbmk_r(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 523.xalancbmk_r(peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Compiler Version Notes (Continued)

64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r:icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r:icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2020
Hardware Availability: Oct-2019
Software Availability: May-2019

Peak Optimization Flags (Continued)

500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

-w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

NX7700x/A5012M-4 v2
(Intel Xeon Platinum 8280M, 2.70GHz)

SPECrate®2017_int_base = 651

SPECrate®2017_int_peak = 682

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2020

Hardware Availability: Oct-2019

Software Availability: May-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-CLX-A5012M-4-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-SPECcpu2017-Flags-V1.2-CLX-A5012M-4-RevC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-27 09:29:22-0500.

Report generated on 2020-03-17 16:15:54 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-17.