



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECSpeed®2017\_fp\_base = 129**

**SPECSpeed®2017\_fp\_peak = 129**

CPU2017 License: 3


**Test Date:** Feb-2020

Test Sponsor: HPE

**Hardware Availability:** Feb-2020

Tested by: HPE

**Software Availability:** Jun-2019

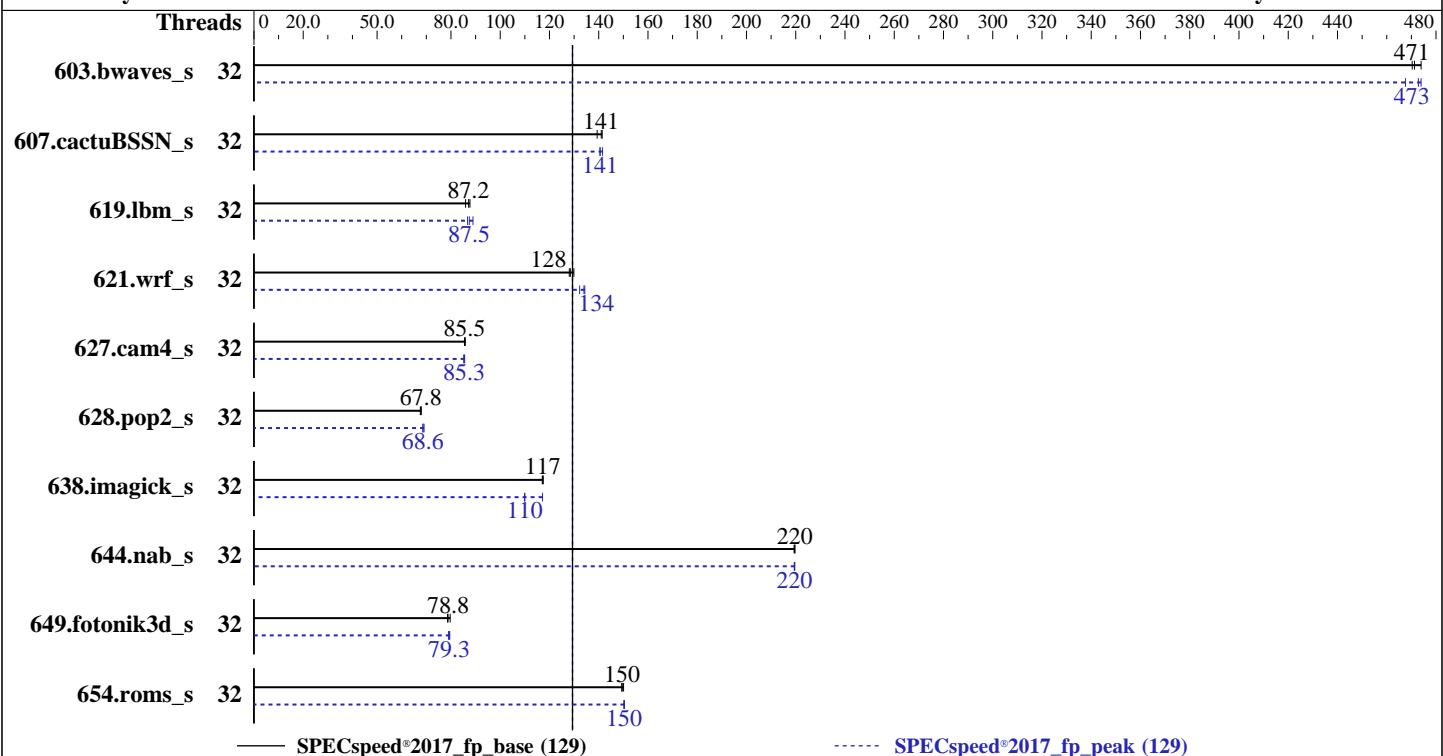

— SPECSpeed®2017\_fp\_base (129)

----- SPECSpeed®2017\_fp\_peak (129)

## Hardware

CPU Name: Intel Xeon Gold 6226R  
 Max MHz: 3900  
 Nominal: 2900  
 Enabled: 32 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 400 GB SAS SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
 Kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: Yes  
 Firmware: HPE BIOS Version U30 2.30 (09/12/2019) released Feb-2020  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

CPU2017 License: 3

**Test Date:** Feb-2020

Test Sponsor: HPE

**Hardware Availability:** Feb-2020

Tested by: HPE

**Software Availability:** Jun-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	124	474	<u>125</u>	<b>471</b>	125	470	32	124	474	<u>125</u>	<b>473</b>	126	468
607.cactubSN_s	32	120	139	118	141	<u>118</u>	<b>141</b>	32	119	141	118	142	<u>119</u>	<b>141</b>
619.lbm_s	32	<b>60.1</b>	<b>87.2</b>	60.9	85.9	59.7	87.7	32	<b>59.9</b>	<b>87.5</b>	58.9	88.9	60.4	86.7
621.wrf_s	32	103	128	102	130	<u>103</u>	<b>128</b>	32	98.4	134	100	132	<u>98.7</u>	<b>134</b>
627.cam4_s	32	<u>104</u>	<b>85.5</b>	103	85.8	104	85.5	32	<u>104</u>	<b>85.3</b>	104	85.6	104	85.2
628.pop2_s	32	<u>175</u>	<b>67.8</b>	175	67.9	176	67.5	32	<u>172</u>	69.1	<u>173</u>	<b>68.6</b>	173	68.6
638.imagick_s	32	123	117	123	117	<u>123</u>	<b>117</b>	32	<u>131</u>	<b>110</b>	131	110	123	117
644.nab_s	32	79.7	219	79.5	220	<u>79.6</u>	<b>220</b>	32	79.6	220	79.6	219	<u>79.6</u>	<b>220</b>
649.fotonik3d_s	32	114	79.7	<u>116</u>	<b>78.8</b>	116	78.6	32	<u>115</u>	79.5	<u>115</u>	<b>79.3</b>	115	79.0
654.roms_s	32	<u>105</u>	<b>150</b>	105	149	105	150	32	<u>105</u>	150	105	150	<u>105</u>	<b>150</b>

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=core,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

CPU2017 License: 3

**Test Date:** Feb-2020

Test Sponsor: HPE

**Hardware Availability:** Feb-2020

Tested by: HPE

**Software Availability:** Jun-2019

## Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetch set to Enabled  
LLC Dead Line Allocation set to Disabled  
Enhanced Processor Performance set to Enabled  
Workload Profile set to General Peak Frequency Compute  
Workload Profile set to Custom  
Energy/Performance Bias set to Balanced Power  
Minimum Processor Idle Power Core C-State set to C1E State  
Numa Group Size Optimization set to Flat  
XPT Prefetcher set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011  
running on linux-3rlx Fri Feb 28 16:32:24 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         46 bits physical, 48 bits virtual
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:   1
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

CPU2017 License: 3

**Test Date:** Feb-2020

Test Sponsor: HPE

**Hardware Availability:** Feb-2020

Tested by: HPE

**Software Availability:** Jun-2019

## Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
Stepping: 7
CPU MHz: 2900.000
BogoMIPS: 5800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 193090 MB
node 0 free: 190629 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 193532 MB
node 1 free: 193225 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10

```

```
From /proc/meminfo
MemTotal: 395901548 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2019

## Platform Notes (Continued)

```
os-release:  
  NAME="SLES"  
  VERSION="15-SP1"  
  VERSION_ID="15.1"  
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"  
  ID="sles"  
  ID_LIKE="suse"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:  
  Linux linux-3rlx 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)  
  x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Feb 28 16:30

```
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2       btrfs  369G  169G  201G  46%  /home
```

```
From /sys/devices/virtual/dmi/id  
  BIOS:    HPE U30 09/12/2019  
  Vendor:   HPE  
  Product:  ProLiant DL380 Gen10  
  Product Family: ProLiant  
  Serial:   2M294204YV
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
  12x UNKNOWN NOT AVAILABLE  
  12x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933
```

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2019

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

**SPECspeed®2017\_fp\_base = 129**

**SPECspeed®2017\_fp\_peak = 129**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Jun-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

603.bwaves\_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: -DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.90 GHz, Intel Xeon Gold 6226R)

SPECspeed®2017\_fp\_base = 129

SPECspeed®2017\_fp\_peak = 129

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: Jun-2019

## Peak Optimization Flags (Continued)

654.roms\_s (continued):

-qopenmp -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

621.wrf\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

627.cam4\_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-28 17:32:23-0500.

Report generated on 2020-03-17 16:15:46 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-17.