



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250, 3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

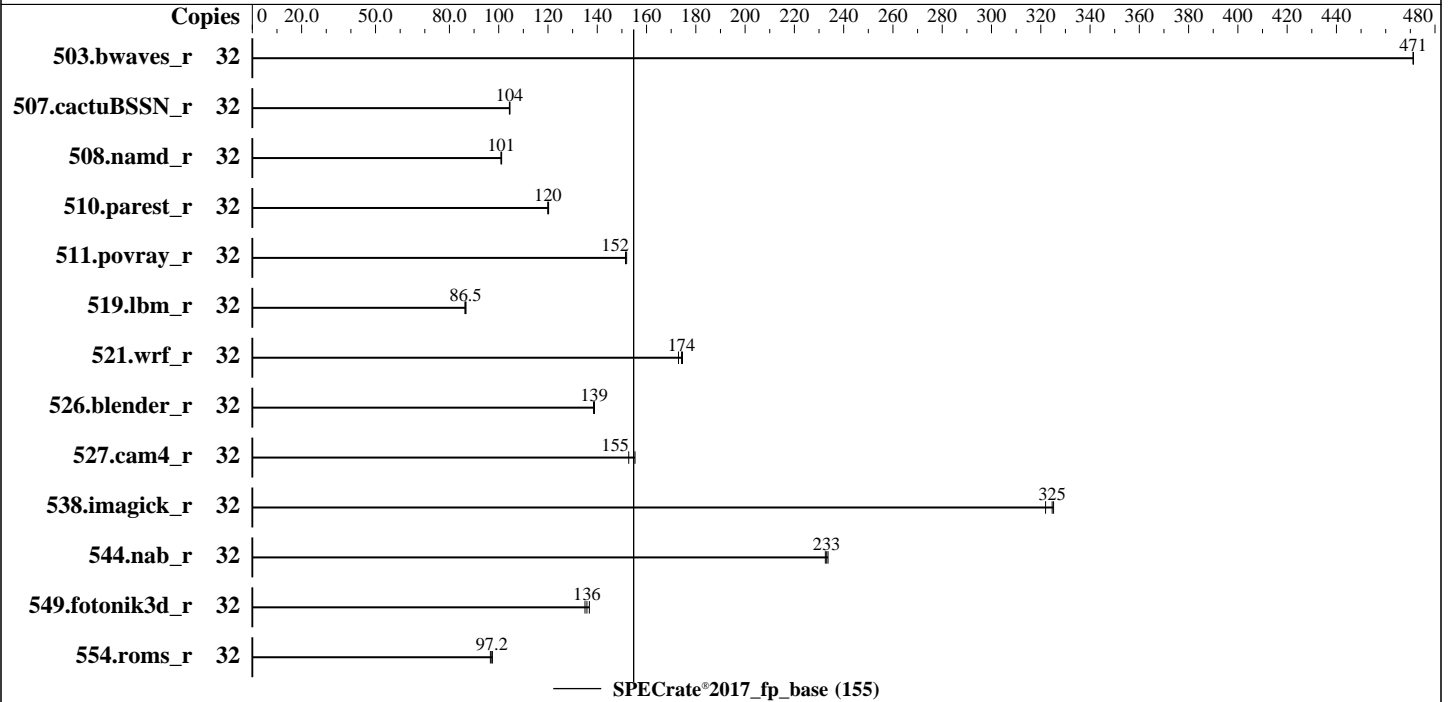

Hardware

CPU Name: Intel Xeon Gold 6250
 Max MHz: 4500
 Nominal: 3900
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x SATA M.2 SSD, 240 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux; Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.18.0 for D3384-B1x released Feb-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250,
3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	681	471	<u>681</u>	<u>471</u>	681	471							
507.cactuBSSN_r	32	388	104	<u>388</u>	<u>104</u>	388	105							
508.namd_r	32	301	101	300	101	<u>301</u>	<u>101</u>							
510.parest_r	32	696	120	698	120	<u>697</u>	<u>120</u>							
511.povray_r	32	492	152	493	151	<u>493</u>	<u>152</u>							
519.lbm_r	32	391	86.3	<u>390</u>	<u>86.5</u>	389	86.7							
521.wrf_r	32	411	175	414	173	<u>411</u>	<u>174</u>							
526.blender_r	32	352	138	<u>351</u>	<u>139</u>	351	139							
527.cam4_r	32	<u>362</u>	<u>155</u>	360	155	366	153							
538.imagick_r	32	245	325	247	322	<u>245</u>	<u>325</u>							
544.nab_r	32	230	234	<u>231</u>	<u>233</u>	232	233							
549.fotonik3d_r	32	<u>918</u>	<u>136</u>	912	137	924	135							
554.roms_r	32	522	97.4	526	96.6	<u>523</u>	<u>97.2</u>							

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-31
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/SPECCPU2017-1.1.0/lib/intel64"

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250, 3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Patrol Scrub = Disabled

WR CRC feature Control = Disabled

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on RX2540M5_CLXR Fri Feb 21 23:24:48 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6250 CPU @ 3.90GHz
```

```
2 "physical id"s (chips)
```

```
32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
```

```
siblings : 16
```

```
physical 0: cores 1 2 3 6 10 12 13 21
```

```
physical 1: cores 2 3 10 12 13 21 24 29
```

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250, 3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Platform Notes (Continued)

```

On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6250 CPU @ 3.90GHz
Stepping: 7
CPU MHz: 3900.000
CPU max MHz: 4500.0000
CPU min MHz: 1200.0000
BogoMIPS: 7800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-2,4,16-18,20
NUMA node1 CPU(s): 3,5-7,19,21-23
NUMA node2 CPU(s): 8-10,14,24-26,30
NUMA node3 CPU(s): 11-13,15,27-29,31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 4 16 17 18 20
node 0 size: 191977 MB
node 0 free: 191702 MB
node 1 cpus: 3 5 6 7 19 21 22 23
node 1 size: 193534 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250, 3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Platform Notes (Continued)

```

node 1 free: 193272 MB
node 2 cpus: 8 9 10 14 24 25 26 30
node 2 size: 193534 MB
node 2 free: 193333 MB
node 3 cpus: 11 12 13 15 27 28 29 31
node 3 size: 193293 MB
node 3 free: 193088 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal:          790875904 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

```

uname -a:
Linux RX2540M5_CLXR 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019
(dd6077c) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling

```

run-level 3 Feb 21 18:08

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250, 3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Platform Notes (Continued)

SPEC is set to: /home/Benchmark/speccpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	191G	113G	79G	59%	/home

From /sys/devices/virtual/dmi/id

BIOS: FUJITSU // American Megatrends Inc. V5.0.0.14 R1.18.0 for D3384-Blx
02/10/2020

Vendor: FUJITSU

Product: PRIMERGY RX2540 M5

Product Family: SERVER

Serial: YMSQXXXXXX

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250,
3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250,
3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Feb-2020
Hardware Availability: Feb-2020
Software Availability: May-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 6250,
3.90 GHz

SPECrate®2017_fp_base = 155

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Feb-2020

Hardware Availability: Feb-2020

Software Availability: May-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-02-21 09:24:47-0500.

Report generated on 2020-03-31 14:58:53 by CPU2017 PDF formatter v6255.

Originally published on 2020-03-31.