



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066


Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jan-2021

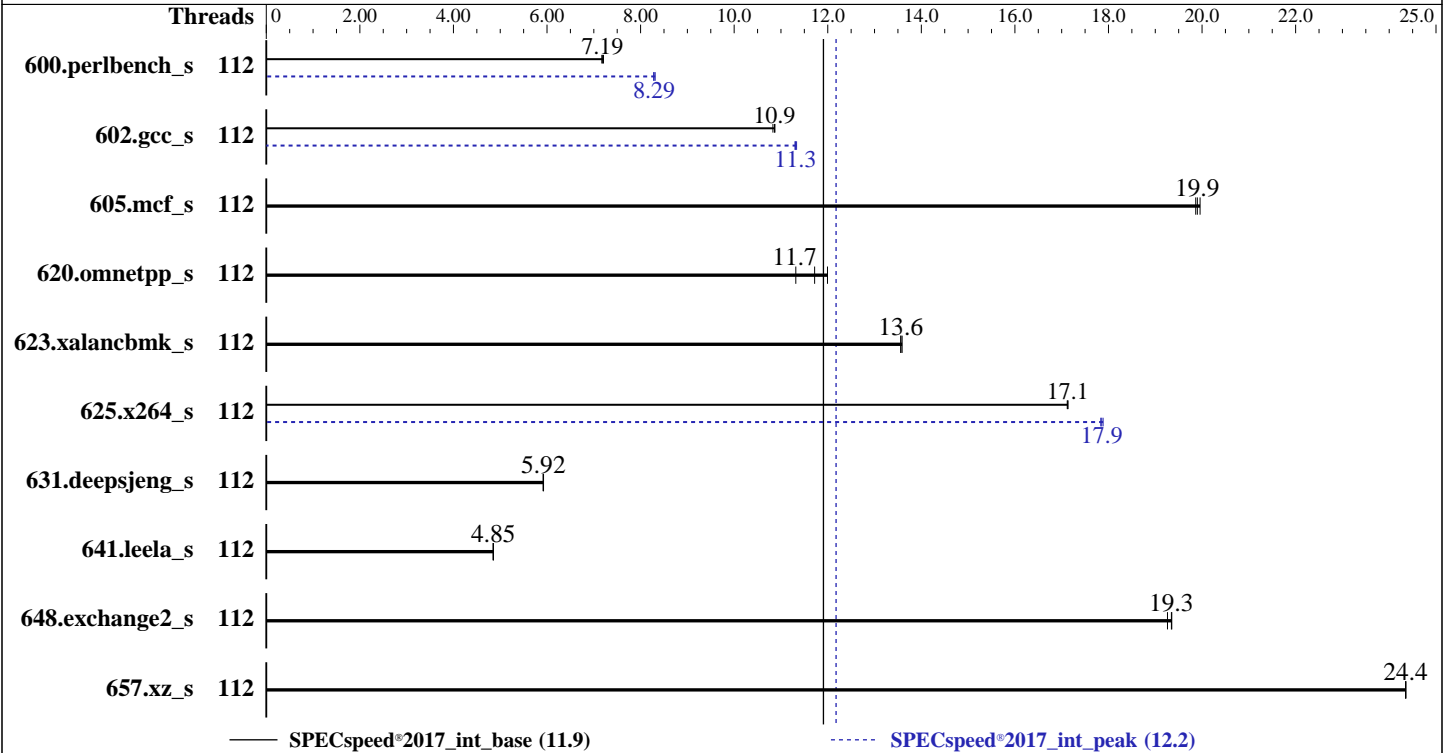

Hardware

CPU Name: Intel Xeon Gold 6348
 Max MHz: 3500
 Nominal: 2600
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 42 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200V-R)
 Storage: 1 x 600GB 10000RPM SAS HDD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: Version 5.34 released Sep-2021 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	247	7.19	246	7.21	248	7.17	112	214	8.31	214	8.28	214	8.29
602.gcc_s	112	366	10.9	368	10.8	367	10.9	112	352	11.3	351	11.3	352	11.3
605.mcf_s	112	237	20.0	238	19.9	237	19.9	112	237	20.0	238	19.9	237	19.9
620.omnetpp_s	112	144	11.3	136	12.0	139	11.7	112	144	11.3	136	12.0	139	11.7
623.xalancbmk_s	112	104	13.6	104	13.6	104	13.6	112	104	13.6	104	13.6	104	13.6
625.x264_s	112	103	17.1	103	17.1	103	17.1	112	98.6	17.9	98.9	17.8	98.8	17.9
631.deepsjeng_s	112	242	5.92	242	5.93	242	5.92	112	242	5.92	242	5.93	242	5.92
641.leela_s	112	351	4.85	352	4.85	351	4.85	112	351	4.85	352	4.85	351	4.85
648.exchange2_s	112	152	19.3	152	19.4	153	19.3	112	152	19.3	152	19.4	153	19.3
657.xz_s	112	254	24.4	254	24.4	254	24.3	112	254	24.4	254	24.4	254	24.3

SPECspeed®2017_int_base = **11.9**

SPECspeed®2017_int_peak = **12.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

```
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Set Power Performance Tuning to BIOS Controls EPB
Set Energy Performance BIAS to Performance
Set Patrol Scrub to Disabled

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Fri Nov 5 18:33:05 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6348 CPU @ 2.60GHz
 2 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 28
  siblings     : 56
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
 25 26 27
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
 25 26 27
```

From lscpu from util-linux 2.32.1:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s):         2
NUMA node(s):     2
Vendor ID:         GenuineIntel
CPU family:        6
Model:             106
Model name:        Intel(R) Xeon(R) Gold 6348 CPU @ 2.60GHz
Stepping:          6
CPU MHz:           2850.067
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jan-2021

Platform Notes (Continued)

```

CPU max MHz:      3500.0000
CPU min MHz:      800.0000
BogoMIPS:         5200.00
Virtualization:   VT-x
L1d cache:        48K
L1i cache:        32K
L2 cache:         1280K
L3 cache:         43008K
NUMA node0 CPU(s): 0-27,56-83
NUMA node1 CPU(s): 28-55,84-111
Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 43008 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
node 0 size: 515232 MB
node 0 free: 498408 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106
107 108 109 110 111
node 1 size: 516081 MB
node 1 free: 513740 MB
node distances:
node    0    1
  0:   10   20
  1:   20   10

```

From /proc/meminfo

MemTotal: 1056065352 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Date: Nov-2021

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Sep-2020

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Jan-2021

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Nov 5 18:23 last=5

SPEC is set to: /home/speccpu

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	504G	19G	485G	4%	/home

From /sys/devices/virtual/dmi/id
Product Family: Rack

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200
16x NO DIMM NO DIMM

BIOS:
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 5.34
BIOS Date: 09/11/2021
BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 600.perlbench_s(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
625.x264_s(base, peak) 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 600.perlbench_s(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
          | 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```

=====
Fortran   | 648.exchange2_s(base, peak)
=====

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Base Portability Flags (Continued)

```
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

600.perlbench_s: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -DSPEC_OPENMP -fiopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 11.9

H3C UniServer R4300 G5 (Intel Xeon Gold 6348)

SPECspeed®2017_int_peak = 12.2

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Nov-2021

Hardware Availability: Sep-2020

Software Availability: Jan-2021

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-CPX-RevD.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-05 06:33:05-0400.

Report generated on 2021-11-24 11:19:05 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-23.