



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3


Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

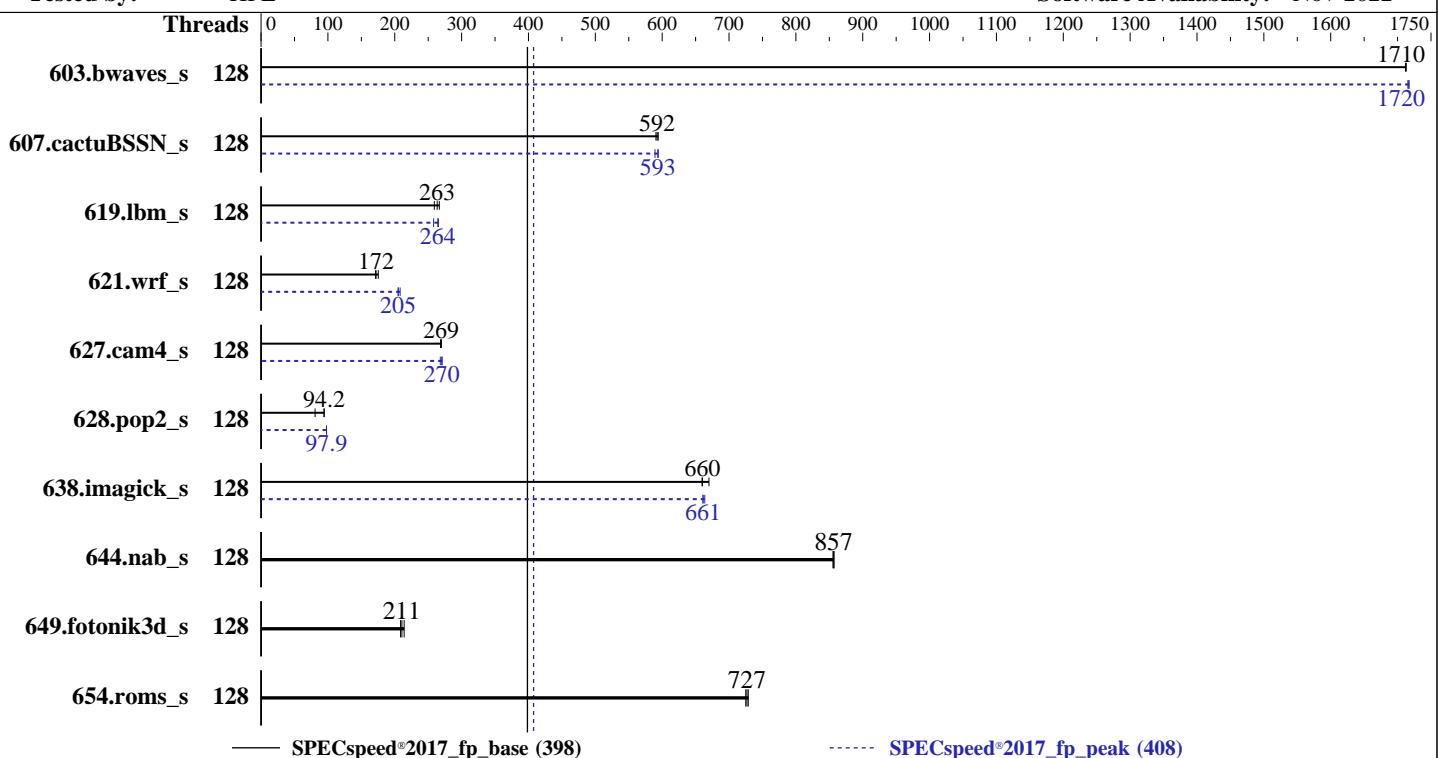

Hardware

CPU Name: AMD EPYC 9534
 Max MHz: 3700
 Nominal: 2450
 Enabled: 128 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 Compiler: Kernel 5.15.0-56-generic
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
 Firmware: Yes
 File System: HPE BIOS Version v1.12 11/24/2022 released
 System State: Nov-2022
 Base Pointers: ext4
 Peak Pointers: Run level 5 (multi-user)
 Other: 64-bit
 Power Management: Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	34.4	1710	34.5	1710	34.5	1710	128	34.4	1720	34.4	1720	34.4	1720
607.cactuBSSN_s	128	28.1	594	28.2	591	28.1	592	128	28.1	593	28.3	589	28.1	594
619.lbm_s	128	19.6	267	20.2	259	19.9	263	128	19.8	264	19.7	265	20.3	258
621.wrf_s	128	76.9	172	77.2	171	75.4	175	128	63.6	208	64.5	205	64.4	205
627.cam4_s	128	32.9	269	32.9	270	33.0	269	128	32.7	271	32.8	270	33.1	268
628.pop2_s	128	147	80.8	126	94.2	126	94.5	128	121	97.9	121	98.0	121	97.9
638.imagick_s	128	21.8	660	21.5	670	21.9	660	128	21.8	661	21.8	661	21.7	664
644.nab_s	128	20.4	857	20.4	855	20.4	857	128	20.4	857	20.4	855	20.4	857
649.fotonik3d_s	128	42.6	214	43.3	211	43.7	209	128	42.6	214	43.3	211	43.7	209
654.roms_s	128	21.7	725	21.7	727	21.6	729	128	21.7	725	21.7	727	21.6	729

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.  
To always enable THP for peak runs of:  
603.bwaves_s, 607.cactubSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.  
To disable THP for peak runs of 621.wrf_s:  
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.  
To enable THP only on request for peak runs of 654.roms_s:  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"  
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_genoa_B_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 607.cactubSSN_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-127"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0xa10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L6

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on admin1 Mon Jun 27 18:38:22 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 9534 64-Core Processor

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23 32 33 34 35 36 37 38 39

48 49 50 51 52 53 54 55 64 65 66 67 68 69 70 71 80 81 82 83 84 85 86 87 96 97 98 99

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

```
100 101 102 103 112 113 114 115 116 117 118 119
physical 1: cores 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23 32 33 34 35 36 37 38 39
48 49 50 51 52 53 54 55 64 65 66 67 68 69 70 71 80 81 82 83 84 85 86 87 96 97 98 99
100 101 102 103 112 113 114 115 116 117 118 119
```

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9534 64-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	64
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3719.0000
CPU min MHz:	400.0000
BogoMIPS:	4892.46
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d
Virtualization:	AMD-V
L1d cache:	4 MiB (128 instances)
L1i cache:	4 MiB (128 instances)
L2 cache:	128 MiB (128 instances)
L3 cache:	512 MiB (16 instances)
NUMA node(s):	16
NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	32-39

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

NUMA node2 CPU(s):	16-23
NUMA node3 CPU(s):	48-55
NUMA node4 CPU(s):	24-31
NUMA node5 CPU(s):	56-63
NUMA node6 CPU(s):	8-15
NUMA node7 CPU(s):	40-47
NUMA node8 CPU(s):	64-71
NUMA node9 CPU(s):	96-103
NUMA node10 CPU(s):	80-87
NUMA node11 CPU(s):	112-119
NUMA node12 CPU(s):	88-95
NUMA node13 CPU(s):	120-127
NUMA node14 CPU(s):	72-79
NUMA node15 CPU(s):	104-111
Vulnerability Itlb multihit:	Not affected
Vulnerability Llrf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 96455 MB
node 0 free: 96267 MB
node 1 cpus: 32 33 34 35 36 37 38 39
node 1 size: 96765 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 1 free: 96535 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 96765 MB
node 2 free: 96638 MB
node 3 cpus: 48 49 50 51 52 53 54 55
node 3 size: 96765 MB
node 3 free: 96612 MB
node 4 cpus: 24 25 26 27 28 29 30 31
node 4 size: 96765 MB
node 4 free: 96630 MB
node 5 cpus: 56 57 58 59 60 61 62 63
node 5 size: 96765 MB
node 5 free: 96629 MB
node 6 cpus: 8 9 10 11 12 13 14 15
node 6 size: 96765 MB
node 6 free: 96594 MB
node 7 cpus: 40 41 42 43 44 45 46 47
node 7 size: 96765 MB
node 7 free: 96619 MB
node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 96765 MB
node 8 free: 96605 MB
node 9 cpus: 96 97 98 99 100 101 102 103
node 9 size: 96765 MB
node 9 free: 96507 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 96765 MB
node 10 free: 96588 MB
node 11 cpus: 112 113 114 115 116 117 118 119
node 11 size: 96730 MB
node 11 free: 96517 MB
node 12 cpus: 88 89 90 91 92 93 94 95
node 12 size: 96765 MB
node 12 free: 96620 MB
node 13 cpus: 120 121 122 123 124 125 126 127
node 13 size: 96716 MB
node 13 free: 96523 MB
node 14 cpus: 72 73 74 75 76 77 78 79
node 14 size: 96765 MB
node 14 free: 96578 MB
node 15 cpus: 104 105 106 107 108 109 110 111
node 15 size: 96765 MB
node 15 free: 96580 MB
node distances:
node  0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  11  11  11  11  11  11  11  32  32  32  32  32  32  32
  1: 11  10  11  11  11  11  11  11  32  32  32  32  32  32  32
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

2:	11	11	10	11	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	
3:	11	11	11	10	11	11	11	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
4:	11	11	11	11	10	11	11	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
5:	11	11	11	11	11	10	11	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
6:	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
7:	11	11	11	11	11	11	10	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11
9:	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11	11
10:	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11	11
11:	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11	11	11	11	11	11	11	11	11
12:	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11	11
13:	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11	11	11	11	11	11	11	11	11
14:	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10	11	11	11	11	10	11	11	11
15:	32	32	32	32	32	32	32	11	11	11	11	11	11	11	11	11	11	11	11	11	10	10	10

From /proc/meminfo

```
MemTotal:      1585007824 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active

```
Current active profile: throughput-performance
```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

/usr/bin/lsb_release -d

```
Ubuntu 22.04.1 LTS
```

From /etc/*release* /etc/*version*

```
debian_version: bookworm/sid
os-release:
PRETTY_NAME="Ubuntu 22.04.1 LTS"
NAME="Ubuntu"
VERSION_ID="22.04"
VERSION="22.04.1 LTS (Jammy Jellyfish)"
VERSION_CODENAME=jammy
ID=ubuntu
ID_LIKE=debian
HOME_URL="https://www.ubuntu.com/"
```

uname -a:

```
Linux admin1 5.15.0-56-generic #62-Ubuntu SMP Tue Nov 22 19:54:14 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.45 GHz, AMD EPYC 9534)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling, PBRSB-eIBRS: Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Jun 27 18:30

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	98G	33G	61G	36%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL385 Gen11
Product Family:	ProLiant
Serial:	DL385GEN11-003

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

13x Hynix HMCG94MEBRA121N	64 GB	2 rank	4800
11x Hynix HMCG94MEBRA123N	64 GB	2 rank	4800

BIOS:

BIOS Vendor:	HPE
BIOS Version:	1.12
BIOS Date:	11/24/2022
BIOS Revision:	1.12
Firmware Revision:	1.10

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
           | 644.nab_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
           | 654.roms_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
Fortran, C    | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
           | 628.pop2_s(base, peak)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes (Continued)

LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on

LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

619.lbm_s (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

638.imagick_s: Same as 619.lbm_s

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdaloc -lflang
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdaloc
-lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-Mrecursive -fvector-transform -fscalar-transform  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100  
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html>
<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-02-15.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml>
<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-02-15.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.45 GHz, AMD EPYC 9534)

SPECspeed®2017_fp_base = 398

SPECspeed®2017_fp_peak = 408

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-27 14:38:21-0400.

Report generated on 2023-02-15 10:35:30 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.