



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11


(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

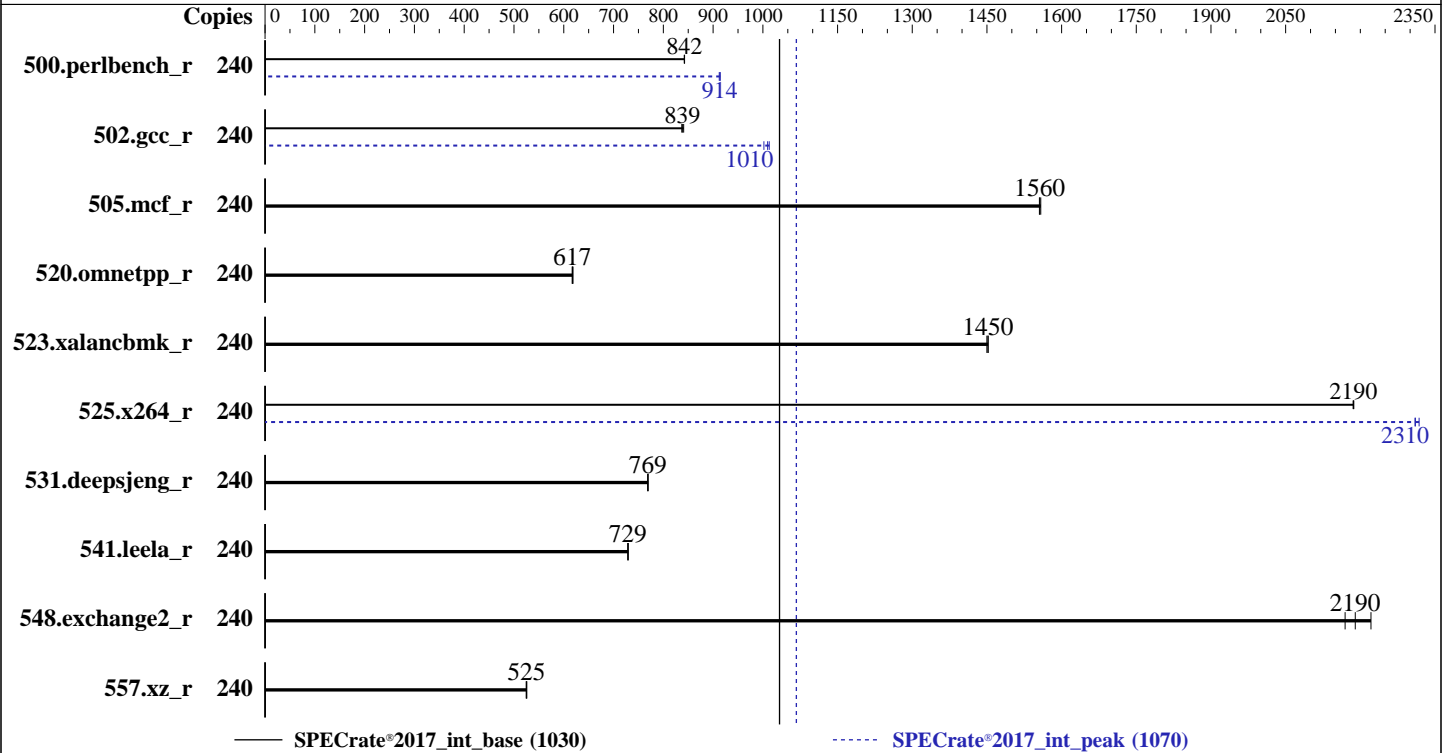

Hardware

CPU Name: Intel Xeon Platinum 8580
Max MHz: 4000
Nominal: 2000
Enabled: 120 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 300 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP5
Kernel 5.14.21-150500.53-default
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	454	842	453	843	454	842	240	418	914	419	912	418	914
502.gcc_r	240	404	841	405	839	406	837	240	339	1000	337	1010	336	1010
505.mcf_r	240	249	1560	249	1560	249	1560	240	249	1560	249	1560	249	1560
520.omnetpp_r	240	510	617	509	619	510	617	240	510	617	509	619	510	617
523.xalancbmk_r	240	175	1450	175	1450	175	1450	240	175	1450	175	1450	175	1450
525.x264_r	240	192	2190	192	2190	192	2190	240	182	2310	182	2310	181	2320
531.deepsjeng_r	240	358	769	357	769	358	769	240	358	769	357	769	358	769
541.leela_r	240	545	729	545	729	545	729	240	545	729	545	729	545	729
548.exchange2_r	240	287	2190	283	2220	290	2170	240	287	2190	283	2220	290	2170
557.xz_r	240	494	525	493	526	494	525	240	494	525	493	526	494	525

SPECrate®2017_int_base = **1030**

SPECrate®2017_int_peak = **1070**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Platinum 8580 processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Intel UPI Link Enablement set to Single Link Operation

Sub-NUMA Clustering (SNC) set to Enable SNC2(2-clusters)

Workload Profile set to Custom

DCU Stream Prefetcher set to Disabled

Adjacent Sector Prefetch set to Disabled

Intel UPI Link Power Management set to Enabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun Feb 4 02:59:34 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

2. w
02:59:34 up 3 min, 0 users, load average: 0.05, 0.10, 0.04
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062534
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062534
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd \$SPEC/ && \$SPEC/intrateTP.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=120 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=120 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : INTEL(R) XEON(R) PLATINUM 8580
vendor_id : GenuineIntel
cpu family : 6
model : 207
stepping : 2
microcode : 0x21000200
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores : 60
siblings : 120
2 physical ids (chips)
240 processors (hardware threads)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 240
On-line CPU(s) list:   0-239
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8580
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):              2
Stepping:               2
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             5.6 MiB (120 instances)
L1i cache:             3.8 MiB (120 instances)
L2 cache:              240 MiB (120 instances)
L3 cache:              600 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-29,120-149
NUMA node1 CPU(s):    30-59,150-179
NUMA node2 CPU(s):    60-89,180-209
NUMA node3 CPU(s):    90-119,210-239
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.6M	12	Data	1	64	1	64
L1i	32K	3.8M	8	Instruction	1	64	1	64
L2	2M	240M	16	Unified	2	2048	1	64
L3	300M	600M	20	Unified	3	245760	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-29,120-149
node 0 size: 128702 MB
node 0 free: 128004 MB
node 1 cpus: 30-59,150-179
node 1 size: 129008 MB
node 1 free: 128538 MB
node 2 cpus: 60-89,180-209
node 2 size: 128974 MB
node 2 free: 128457 MB
node 3 cpus: 90-119,210-239
node 3 size: 128970 MB
node 3 free: 128495 MB
node distances:
node 0 1 2 3
0: 10 20 30 30
1: 20 10 30 30
2: 30 30 10 20
3: 30 30 20 10
```

9. /proc/meminfo

MemTotal: 528032188 kB

10. who -r

run-level 3 Feb 4 02:58

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load lunmask
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

indirect wickedd

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=930f8b53-ff67-403e-9053-e3aa4fef0050
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. tuned-adm active
Current active profile: throughput-performance
```

```
-----
16. sysctl
kernel.numa_balancing            1
kernel.randomize_va_space       2
vm.compaction_proactiveness     20
vm.dirty_background_bytes        0
vm.dirty_background_ratio       10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio            1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode             0
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag            always defer defer+madvice [madvice] never
enabled           [always] madvice never
hpage_pmd_size   2097152
shmem_enabled    always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs   60000
defrag                   1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

20. Disk information

SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdb3 btrfs 446G 205G 242G 46% /home

21. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant ML350 Gen11
Product Family: ProLiant
Serial: CNX20800P4

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.12
BIOS Date: 12/13/2023
BIOS Revision: 2.12
Firmware Revision: 1.54

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Portability Flags (Continued)

```

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

```

```

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

```

505.mcf_r: basepeak = yes

```

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.00 GHz, Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1030

SPECrate®2017_int_peak = 1070

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-03 16:29:33-0500.

Report generated on 2024-02-28 19:31:24 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.