



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

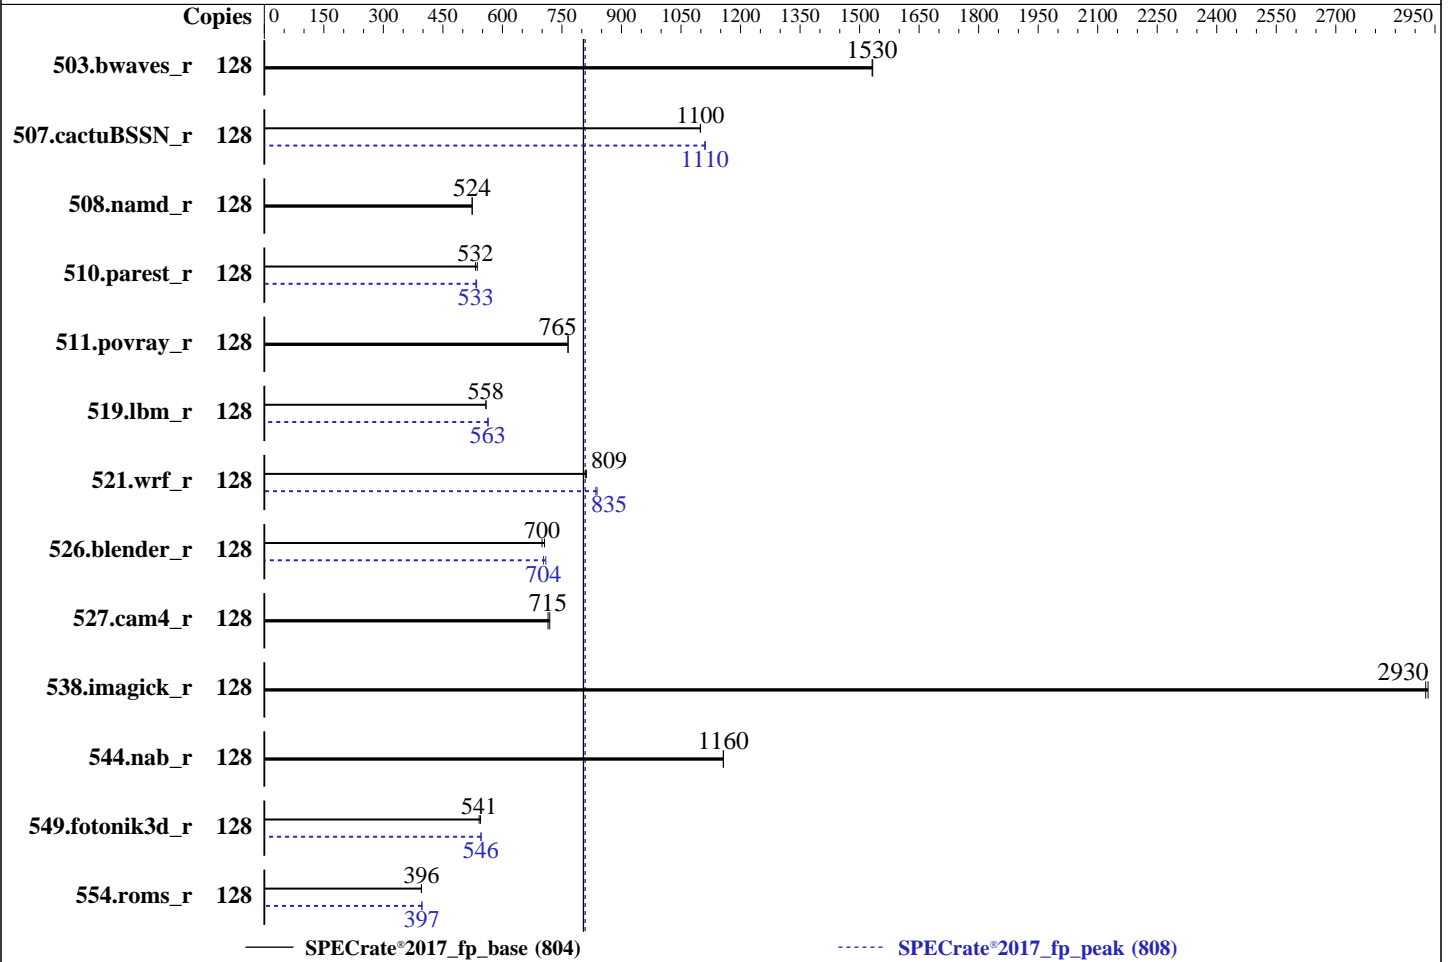

### Hardware

CPU Name: AMD EPYC 9334  
 Max MHz: 3900  
 Nominal: 2700  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 80 GB on tmpfs  
 Other: CPU Cooling: DLC

### Software

OS: Ubuntu 22.04.3 LTS  
 5.15.0-84-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.4.6 released Jul-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2024  
Hardware Availability: Feb-2023  
Software Availability: Sep-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	837	1530	<b><u>838</u></b>	<b><u>1530</u></b>			128	837	1530	<b><u>838</u></b>	<b><u>1530</u></b>		
507.cactuBSSN_r	128	147	1100	<b><u>147</u></b>	<b><u>1100</u></b>			128	146	1110	<b><u>146</u></b>	<b><u>1110</u></b>		
508.namd_r	128	232	524	<b><u>232</u></b>	<b><u>524</u></b>			128	232	524	<b><u>232</u></b>	<b><u>524</u></b>		
510.parest_r	128	<b><u>629</u></b>	<b><u>532</u></b>	624	537			128	626	535	<b><u>628</u></b>	<b><u>533</u></b>		
511.povray_r	128	390	765	<b><u>391</u></b>	<b><u>765</u></b>			128	390	765	<b><u>391</u></b>	<b><u>765</u></b>		
519.lbm_r	128	<b><u>242</u></b>	<b><u>558</u></b>	241	559			128	239	564	<b><u>240</u></b>	<b><u>563</u></b>		
521.wrf_r	128	353	812	<b><u>354</u></b>	<b><u>809</u></b>			128	<b><u>343</u></b>	<b><u>835</u></b>	342	838		
526.blender_r	128	<b><u>279</u></b>	<b><u>700</u></b>	276	706			128	<b><u>277</u></b>	<b><u>704</u></b>	275	709		
527.cam4_r	128	311	719	<b><u>313</u></b>	<b><u>715</u></b>			128	311	719	<b><u>313</u></b>	<b><u>715</u></b>		
538.imagick_r	128	109	2930	<b><u>109</u></b>	<b><u>2930</u></b>			128	109	2930	<b><u>109</u></b>	<b><u>2930</u></b>		
544.nab_r	128	186	1160	<b><u>186</u></b>	<b><u>1160</u></b>			128	186	1160	<b><u>186</u></b>	<b><u>1160</u></b>		
549.fotonik3d_r	128	915	545	<b><u>921</u></b>	<b><u>541</u></b>			128	913	546	<b><u>914</u></b>	<b><u>546</u></b>		
554.roms_r	128	514	396	<b><u>514</u></b>	<b><u>396</u></b>			128	<b><u>512</u></b>	<b><u>397</u></b>	512	397		

SPECrate®2017\_fp\_base = **804**

SPECrate®2017\_fp\_peak = **808**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
  "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-Al.1/amd_rate_aocc400_znver4_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-Al.1/amd_rate_aocc400_znver4_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

DRAM Refresh Delay : Performance  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled  
NUMA Nodes per Socket : 4  
L3 cache as NUMA Domain : Enabled

System Profile : Custom  
C-States : Disabled  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled  
Determinism Slider : Power Determinism

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-Al.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd-spa Thu Feb 29 03:35:59 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2023

**Software Availability:** Sep-2023

## Platform Notes (Continued)

- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. tuned-adm active
- 17. sysctl
- 18. /sys/kernel/mm/transparent\_hugepage
- 19. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 20. OS release
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

```
-----
1. uname -a
   Linux amd-spa 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
   03:35:59 up 3:19, 1 user, load average: 88.66, 117.64, 123.07
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1    -             00:19    3:16m  3.16s  0.45s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
-----
```

```
-----
3. Username
   From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093802
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----
```

```
-----
5. sysinfo process ancestry
   /sbin/init
   /bin/login -p --
   -bash
   /bin/bash ./DELL_rate.sh
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

```

/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProc=1
--define DL-VERS=4.9.2 --output_format html,pdf,txt --define DL-LQC=1
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
DL-BIOS-LogProc=1 --define DL-VERS=4.9.2 --output_format html,pdf,txt --define DL-LQC=1 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
DL-BIOS-LogProc=1 --define DL-VERS=4.9.2 --output_format html,pdf,txt --define DL-LQC=1 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $$SPEC/bin/sysinfo
$$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9334 32-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 32
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 64-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9334 32-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 1
BogoMIPS: 5401.96
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_fp\_base = 804

### PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

## SPECrate®2017\_fp\_peak = 808

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2023  
**Software Availability:** Sep-2023

### Platform Notes (Continued)

```
rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmlil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_omsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld
```

```
Virtualization: AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling, PBRBS-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 96309 MB
node 0 free: 95490 MB
node 1 cpus: 8-15,72-79
node 1 size: 96763 MB
node 1 free: 96001 MB
node 2 cpus: 16-23,80-87
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

```

node 2 size: 96763 MB
node 2 free: 95992 MB
node 3 cpus: 24-31,88-95
node 3 size: 96747 MB
node 3 free: 95987 MB
node 4 cpus: 32-39,96-103
node 4 size: 96763 MB
node 4 free: 96043 MB
node 5 cpus: 40-47,104-111
node 5 size: 96763 MB
node 5 free: 96023 MB
node 6 cpus: 48-55,112-119
node 6 size: 96763 MB
node 6 free: 95995 MB
node 7 cpus: 56-63,120-127
node 7 size: 96689 MB
node 7 free: 92427 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      792129552 kB

```

```

-----
10. who -r
run-level 5 Feb 29 00:16

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
Default Target Status
graphical          degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* fwupd-refresh.service             loaded failed failed Refresh fwupd metadata and update motd

```

```

-----
13. Services, from systemctl list-unit-files
STATE     UNIT FILES
enabled   ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors
lvm2-monitor lxd-agent multipathd networkd-dispatcher open-vm-tools pollinate rsyslog
secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved
systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled   console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport
indirect   uidd

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

## Platform Notes (Continued)

masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo  
systemd-networkd-wait-online x11-common

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/vmlinuz-5.15.0-84-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv  
ro

-----  
15. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2700MHz

-----  
16. tuned-adm active  
Current active profile: latency-performance

-----  
17. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 3  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 1

-----  
18. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2024  
Hardware Availability: Feb-2023  
Software Availability: Sep-2023

## Platform Notes (Continued)

pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

20. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 22.04.3 LTS

21. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 80G 3.5G 77G 5% /mnt/ramdisk

22. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R6625  
Product Family: PowerEdge  
Serial: BGP4016

23. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
10x 802C0000802C MTC20F2085S1RC48BA1 32 GB 2 rank 4800  
8x 80CE000080CE M321R4GA3BB0-CQKVG 32 GB 2 rank 4800  
6x 80CE000080CE M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.4.6  
BIOS Date: 07/06/2023  
BIOS Revision: 1.4

## Compiler Version Notes

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

## Compiler Version Notes (Continued)

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
 526.blender\_r: -funsigned-char -DSPEC\_LP64  
 527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
 -Wl,-mllvm -Wl,-reduce-array-computations=3  
 -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
 -march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
 -mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fininline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Peak Optimization Flags (Continued)

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

```
526.blender_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-finline-aggressive -mllvm -unroll-threshold=100 -lamdlibm
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2023

Software Availability: Sep-2023

## Peak Optimization Flags (Continued)

526.blender\_r (continued):

-lamdalloc

Benchmarks using Fortran, C, and C++:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvector-transform
-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang

```

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml>





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 804

PowerEdge R6625 (AMD EPYC 9334 32-Core Processor)

SPECrate®2017\_fp\_peak = 808

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2023

**Software Availability:** Sep-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-28 22:35:58-0500.

Report generated on 2024-04-09 15:57:03 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.