SPEC® CINT2006 Result

Hewlett-Packard Company

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint®2006 = 15.2

SPECint_base2006 = 13.9

CPU2006 license: 03		**Test date:**	Dec-2006
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Feb-2007
Tested by:	Hewlett-Packard Company	**Software Availability:**	Feb-2007

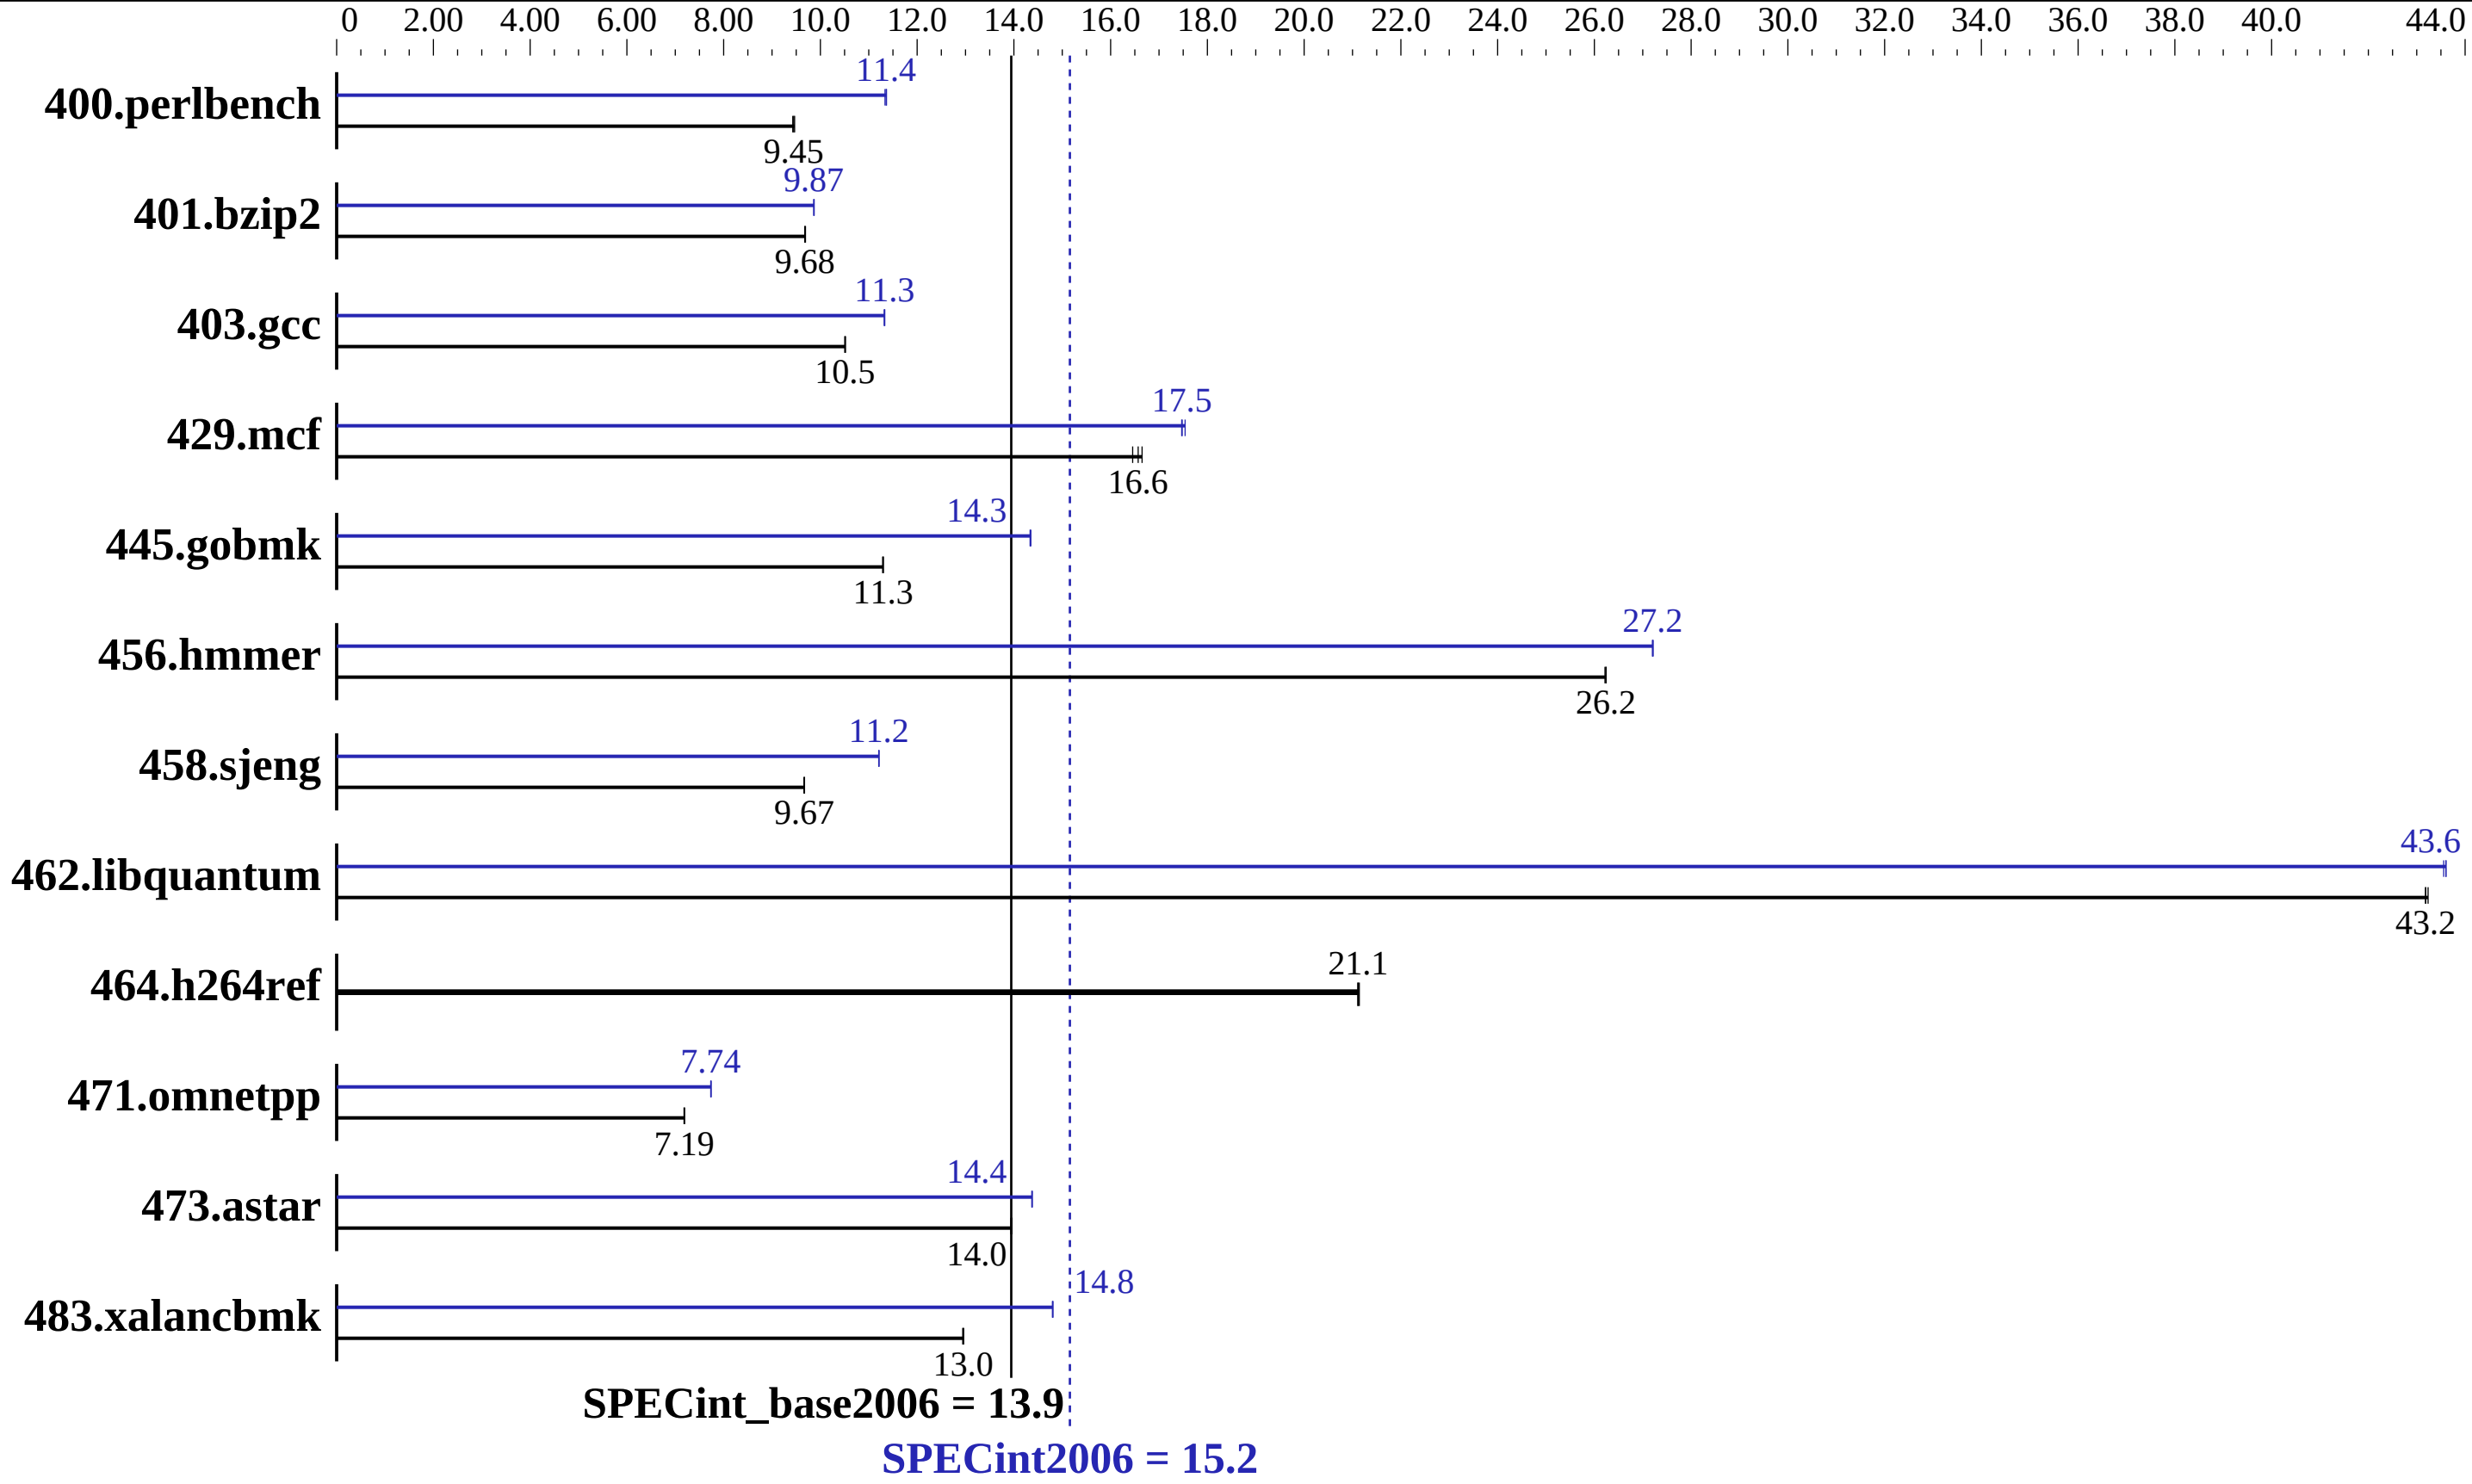

Hardware

CPU Name:	Dual-Core Intel Itanium 2 9040
CPU Characteristics:	1.6GHz/18MB, 533MHz FSB
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1-2 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core
L3 Cache:	9 MB I+D on chip per core
Other Cache:	None
Memory:	8 GB (4x2GB DIMMs)
Disk Subsystem:	73GB 10K RPM SAS
Other Hardware:	None

Software

Operating System:	HPUX11i-TCOE B.11.23.0609
Compiler:	HP C/aC++ Developer's Bundle C.11.23.12
Auto Parallel:	No
File System:	vxfs
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill Smartheap 8.0

Hewlett-Packard Company

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint2006 = 15.2

SPECint_base2006 = 13.9

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: Dec-2006
Hardware Availability: Feb-2007
Software Availability: Feb-2007

Results Table

	Base						Peak					
Benchmark	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	1036	9.43	**1034**	**9.45**	1032	9.47	860	11.4	**860**	**11.4**	862	11.3
401.bzip2	997	9.68	**997**	**9.68**	996	9.69	**978**	**9.87**	978	9.87	978	9.86
403.gcc	**766**	**10.5**	765	10.5	766	10.5	711	11.3	710	11.3	**711**	**11.3**
429.mcf	554	16.5	548	16.6	**550**	**16.6**	522	17.5	520	17.5	**522**	**17.5**
445.gobmk	929	11.3	**929**	**11.3**	928	11.3	**731**	**14.3**	731	14.4	732	14.3
456.hmmer	356	26.2	**356**	**26.2**	356	26.2	343	27.2	**343**	**27.2**	343	27.2
458.sjeng	1253	9.66	**1252**	**9.67**	1251	9.67	1080	11.2	**1079**	**11.2**	1079	11.2
462.libquantum	**480**	**43.2**	480	43.2	479	43.2	476	43.6	**475**	**43.6**	475	43.6
464.h264ref	1048	21.1	**1048**	**21.1**	1047	21.1	1048	21.1	**1048**	**21.1**	1047	21.1
471.omnetpp	870	7.18	**869**	**7.19**	869	7.19	807	7.74	**808**	**7.74**	808	7.73
473.astar	504	13.9	**503**	**14.0**	503	14.0	488	14.4	488	14.4	**488**	**14.4**
483.xalancbmk	533	12.9	**533**	**13.0**	532	13.0	466	14.8	**466**	**14.8**	466	14.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
The system had the September 2006 HP-UX 11i v2 Technical Computing
Operating Environment (TCOE) and compilers installed, along with
the following patches:

PHSS_34858  linker + fdp cumulative patch
PHSS_34853  Math Library Cumulative Patch
PHSS_34854  Integrity Unwind Library
PHSS_34855  HP C Compiler (A.06.12)
PHSS_34856  aC++ Compiler (A.06.12)
PHSS_34857  u2comp/be/plugin library patch
PHSS_34395  FORTRAN I/O Library [libIO77]
PHSS_34397  FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399  Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020  Perfmon enhancements and Itanium Dual-Core

The following kernel tunables were set, in addition to the defaults
set by the Technical Computing OE:

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Platform Notes

```
The "cpuconfig" EFI command was used prior to booting
  to deconfigure processors.

Although two cores were enabled during testing,
  the SPEC CPU2006 benchmarks used only one core.
```

Base Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_HPUX_IA64`
403.gcc: `-DSPEC_CPU_HPUX`
462.libquantum: `-DSPEC_CPU_HPUX`
483.xalancbmk: `-DSPEC_CPU_HPUX_IA64`

Base Optimization Flags

C benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a
```

Peak Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:17:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2007.