



SPEC® CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB+ (Intel Xeon processor 5120, 1.86 GHz)

SPECint®2006 = 14.1

SPECint_base2006 = 12.8

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

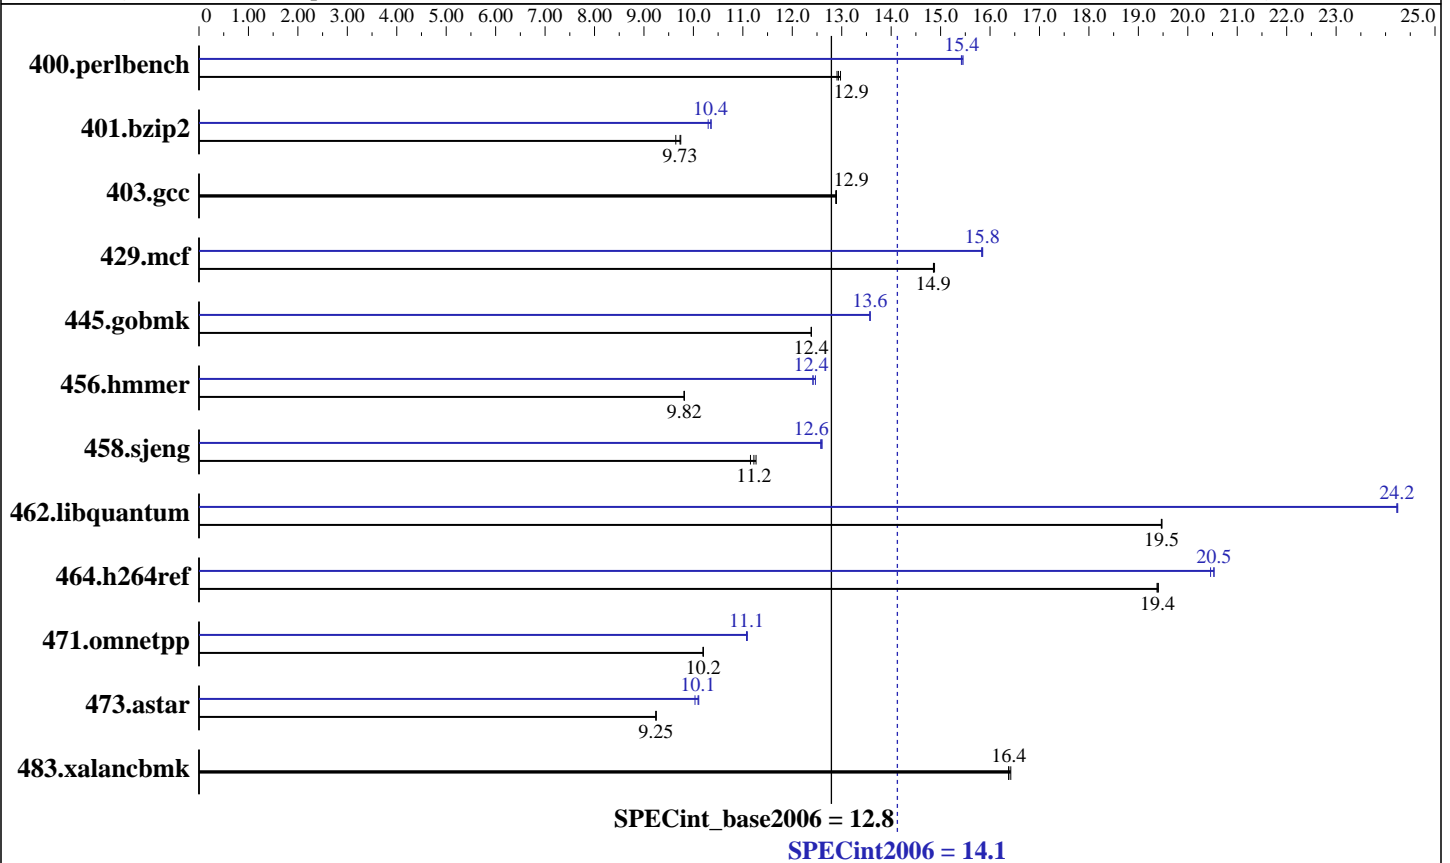

Hardware

CPU Name: Intel Xeon 5120
 CPU Characteristics: Dual Core, 1.86 GHz
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8 * 1GB Samsung DDR2 5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: Seagate, SCSI, 73GB, 10Krpm, 1 disk only
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
 Compiler: Intel C++ Compiler for Linux32 version 10.0 Build 20070426 Package ID: l_cc_p_10.0.023
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap library V8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor 5120, 1.86 GHz)

SPECint2006 = 14.1

SPECint_base2006 = 12.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	757	12.9	<u>755</u>	<u>12.9</u>	753	13.0	<u>632</u>	15.5	634	15.4	<u>633</u>	<u>15.4</u>
401.bzip2	<u>992</u>	<u>9.73</u>	990	9.74	1001	9.64	<u>932</u>	<u>10.4</u>	931	10.4	937	10.3
403.gcc	625	12.9	624	12.9	<u>624</u>	<u>12.9</u>	625	12.9	624	12.9	<u>624</u>	<u>12.9</u>
429.mcf	614	14.9	<u>614</u>	<u>14.9</u>	613	14.9	575	15.9	576	15.8	<u>576</u>	<u>15.8</u>
445.gobmk	847	12.4	847	12.4	<u>847</u>	<u>12.4</u>	773	13.6	773	13.6	<u>773</u>	<u>13.6</u>
456.hmmer	950	9.82	951	9.81	<u>951</u>	<u>9.82</u>	748	12.5	<u>751</u>	<u>12.4</u>	751	12.4
458.sjeng	1085	11.2	1074	11.3	<u>1078</u>	<u>11.2</u>	<u>961</u>	<u>12.6</u>	962	12.6	960	12.6
462.libquantum	1064	19.5	<u>1064</u>	<u>19.5</u>	1064	19.5	855	24.2	<u>855</u>	<u>24.2</u>	855	24.2
464.h264ref	1140	19.4	<u>1141</u>	<u>19.4</u>	1142	19.4	1078	20.5	<u>1078</u>	<u>20.5</u>	1082	20.5
471.omnetpp	<u>613</u>	<u>10.2</u>	613	10.2	613	10.2	564	11.1	<u>564</u>	<u>11.1</u>	564	11.1
473.astar	760	9.24	<u>759</u>	<u>9.25</u>	759	9.25	694	10.1	<u>695</u>	<u>10.1</u>	700	10.0
483.xalancbmk	420	16.4	<u>421</u>	<u>16.4</u>	421	16.4	420	16.4	<u>421</u>	<u>16.4</u>	421	16.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Bios settings:

Hardware Prefetcher: Enabled

Adjacent Sector Prefetch: Enabled

ulimit -s unlimited used to set stack size to unlimited

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor 5120, 1.86 GHz)

SPECint2006 = 14.1

SPECint_base2006 = 12.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor 5120, 1.86 GHz)

SPECint2006 = 14.1

SPECint_base2006 = 12.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec_div -ansi-alias

456.hmmer: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Ob0
-prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec_div -ansi-alias -Wl,-z,muldefs
-L/spec/cpu2006.1.0/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

Same as Base Other Flags

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090715.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090715.00.xml>



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor 5120,
1.86 GHz)

SPECint2006 = 14.1

SPECint_base2006 = 12.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Nov-2006

Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 14 21:02:01 2009 by SPEC CPU2006 PS/PDF formatter v6323.