SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3655 (AMD Opteron 2216)

SPECint®2006 = 12.2

SPECint_base2006 = 11.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

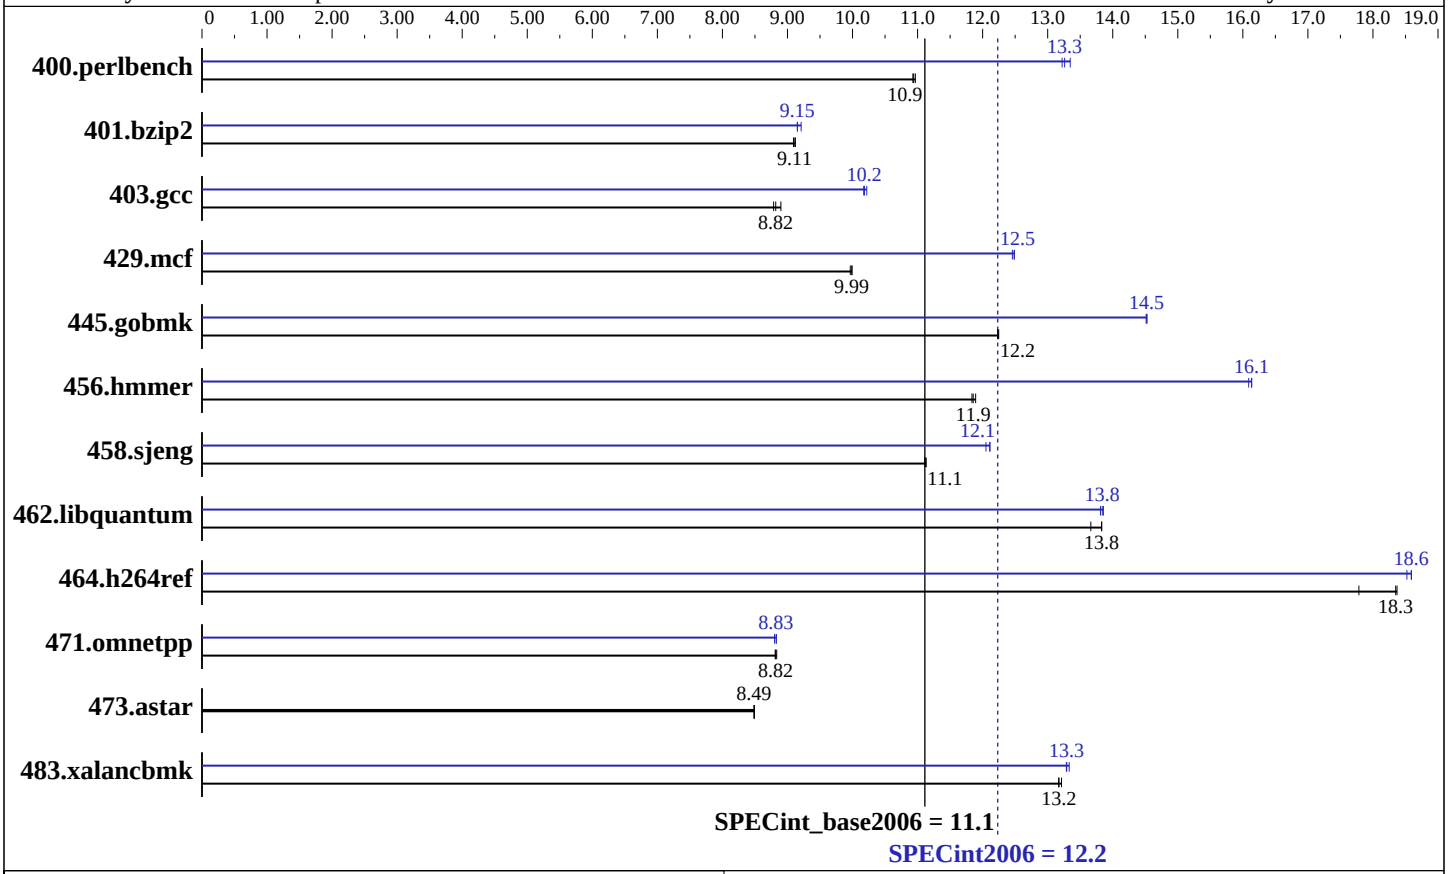

Hardware

CPU Name:	AMD Opteron 2216
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3655 (AMD Opteron 2216)

SPECint2006 = 12.2

SPECint_base2006 = 11.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	894	10.9	**893**	**10.9**	891	11.0	732	13.3	739	13.2	**737**	**13.3**
401.bzip2	1058	9.12	1061	9.09	**1059**	**9.11**	1048	9.21	**1054**	**9.15**	1054	9.15
403.gcc	905	8.90	**913**	**8.82**	916	8.79	788	10.2	**790**	**10.2**	791	10.2
429.mcf	**913**	**9.99**	913	9.99	915	9.97	**731**	**12.5**	730	12.5	732	12.5
445.gobmk	857	12.2	**857**	**12.2**	858	12.2	723	14.5	722	14.5	**722**	**14.5**
456.hmmer	**787**	**11.9**	785	11.9	788	11.8	**578**	**16.1**	578	16.1	580	16.1
458.sjeng	1087	11.1	**1089**	**11.1**	1089	11.1	**999**	**12.1**	999	12.1	1004	12.1
462.libquantum	1516	13.7	1498	13.8	**1498**	**13.8**	**1497**	**13.8**	1500	13.8	1495	13.9
464.h264ref	**1206**	**18.3**	1205	18.4	1244	17.8	1195	18.5	**1190**	**18.6**	1190	18.6
471.omnetpp	707	8.83	709	8.81	**709**	**8.82**	708	8.83	**708**	**8.83**	710	8.80
473.astar	827	8.49	827	8.49	**827**	**8.49**	827	8.49	827	8.49	**827**	**8.49**
483.xalancbmk	522	13.2	524	13.2	**524**	**13.2**	518	13.3	519	13.3	**519**	**13.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:Ofast`

429.mcf: `-m32 -O3 -ipa -L/tools/SmartHeap_8.1/lib -lsmartheap`

445.gobmk: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on`

456.hmmer: `-O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0`

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=50000 -IPA:pu_reorder=2`

462.libquantum: `-O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0`

C++ benchmarks:

471.omnetpp: `-Ofast -CG:gcm=off -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-Ofast -m32 -OPT:unroll_times_max=8 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3655 (AMD Opteron 2216)

SPECint2006 = 12.2

SPECint_base2006 = 11.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:41:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.