SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3455 (AMD Opteron 2220)

SPECint®2006 = 13.8

SPECint_base2006 = 12.6

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

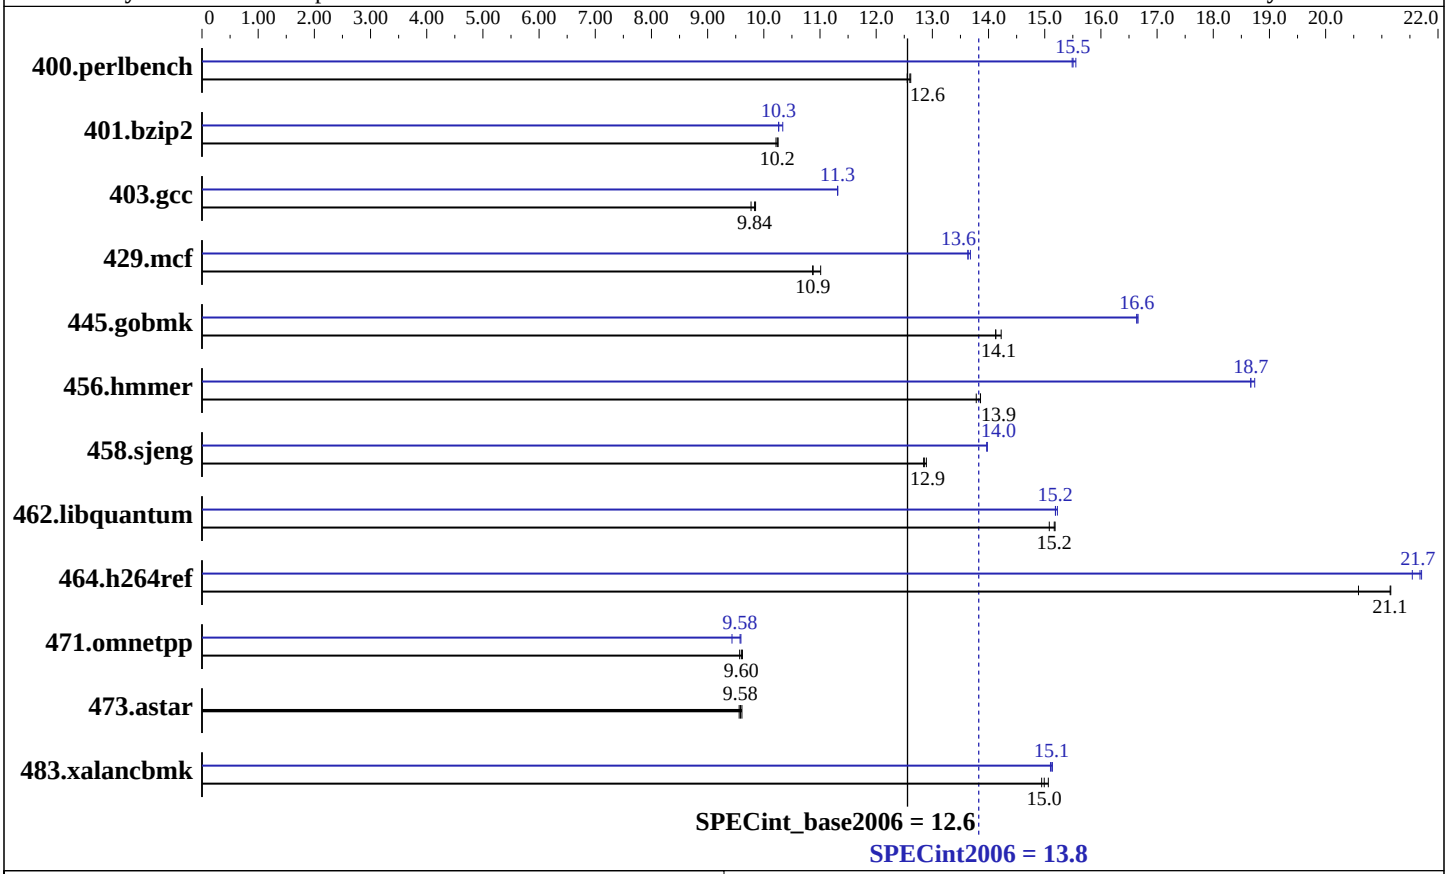

Hardware

CPU Name:	AMD Opteron 2220
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 160 GB Serial ATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3455 (AMD Opteron 2220)

SPECint2006 = 13.8

SPECint_base2006 = 12.6

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	774	12.6	**775**	**12.6**	778	12.6	631	15.5	628	15.6	**630**	**15.5**
401.bzip2	944	10.2	941	10.3	**942**	**10.2**	934	10.3	940	10.3	**940**	**10.3**
403.gcc	817	9.85	**818**	**9.84**	824	9.77	712	11.3	**712**	**11.3**	711	11.3
429.mcf	828	11.0	**838**	**10.9**	839	10.9	667	13.7	**669**	**13.6**	669	13.6
445.gobmk	737	14.2	**742**	**14.1**	743	14.1	630	16.7	631	16.6	**630**	**16.6**
456.hmmer	**673**	**13.9**	673	13.9	677	13.8	498	18.7	500	18.7	**500**	**18.7**
458.sjeng	**941**	**12.9**	938	12.9	942	12.8	866	14.0	**866**	**14.0**	866	14.0
462.libquantum	1365	15.2	1374	15.1	**1366**	**15.2**	**1364**	**15.2**	1361	15.2	1364	15.2
464.h264ref	1046	21.2	1075	20.6	**1046**	**21.1**	1027	21.5	1019	21.7	**1021**	**21.7**
471.omnetpp	650	9.62	**651**	**9.60**	653	9.57	652	9.59	**653**	**9.58**	663	9.43
473.astar	730	9.61	734	9.56	**732**	**9.58**	730	9.61	734	9.56	**732**	**9.58**
483.xalancbmk	458	15.1	**460**	**15.0**	462	14.9	456	15.1	457	15.1	**456**	**15.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:Ofast`

429.mcf: `-m32 -O3 -ipa -L/tools/SmartHeap_8.1/lib -lsmartheap`

445.gobmk: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on`

456.hmmer: `-O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0`

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=50000 -IPA:pu_reorder=2`

462.libquantum: `-O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0`

C++ benchmarks:

471.omnetpp: `-Ofast -CG:gcm=off -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-Ofast -m32 -OPT:unroll_times_max=8 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3455 (AMD Opteron 2220)

SPECint2006 = 13.8

SPECint_base2006 = 12.6

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Apr-2007
Software Availability: Mar-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:49:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.