SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS41 (AMD Opteron 8218)

SPECint®_rate2006 = 95.6

SPECint_rate_base2006 = 85.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

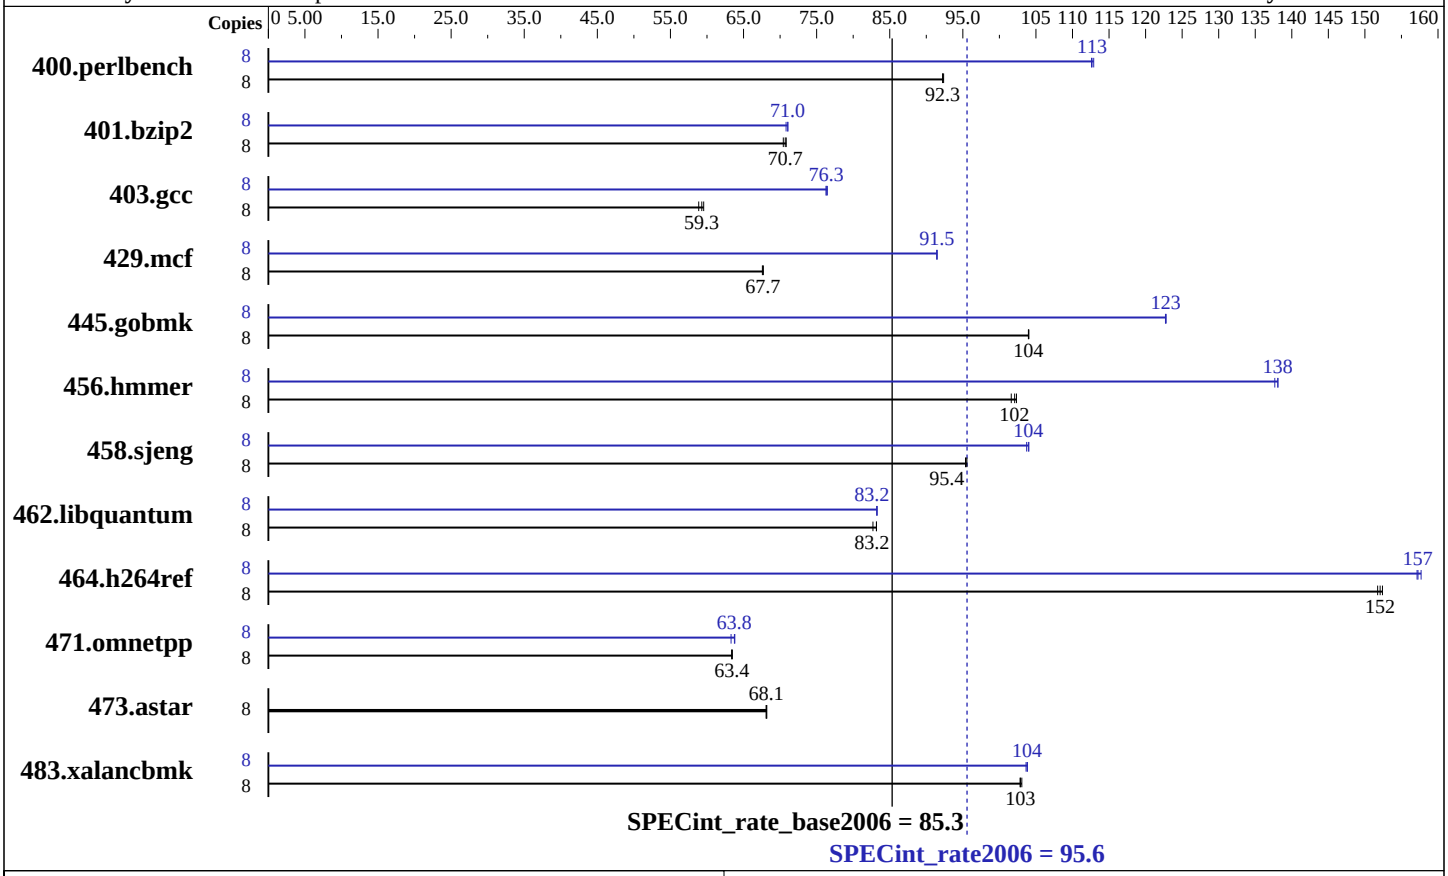

Hardware

CPU Name:	AMD Opteron 8218
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1, 2, 3, 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (16 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS41 (AMD Opteron 8218)

SPECint_rate2006 = 95.6

SPECint_rate_base2006 = 85.3

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	846	92.4	847	92.2	**847**	**92.3**	8	**694**	**113**	692	113	694	113
401.bzip2	8	1090	70.8	1096	70.4	**1092**	**70.7**	8	1090	70.8	1086	71.1	**1087**	**71.0**
403.gcc	8	1094	58.9	1081	59.5	**1086**	**59.3**	8	842	76.5	**844**	**76.3**	844	76.3
429.mcf	8	1080	67.6	1078	67.7	**1078**	**67.7**	8	798	91.5	**798**	**91.5**	798	91.4
445.gobmk	8	**807**	**104**	807	104	807	104	8	683	123	**684**	**123**	684	123
456.hmmer	8	**731**	**102**	729	102	734	102	8	540	138	**541**	**138**	542	138
458.sjeng	8	**1014**	**95.4**	1013	95.6	1015	95.4	8	930	104	933	104	**931**	**104**
462.libquantum	8	2004	82.7	**1993**	**83.2**	1993	83.2	8	1991	83.3	1992	83.2	**1991**	**83.2**
464.h264ref	8	1162	152	**1164**	**152**	1167	152	8	1123	158	1127	157	**1126**	**157**
471.omnetpp	8	**788**	**63.4**	788	63.5	789	63.4	8	790	63.3	784	63.8	**784**	**63.8**
473.astar	8	824	68.2	825	68.1	**825**	**68.1**	8	824	68.2	825	68.1	**825**	**68.1**
483.xalancbmk	8	536	103	537	103	**536**	**103**	8	533	104	**532**	**104**	532	104

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:Ofast`

429.mcf: `-m32 -O3 -ipa -L/tools/SmartHeap_8.1/lib -lsmartheap`

445.gobmk: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on`

456.hmmer: `-O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0`

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=50000 -IPA:pu_reorder=2`

462.libquantum: `-O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0`

C++ benchmarks:

471.omnetpp: `-Ofast -CG:gcm=off -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-Ofast -m32 -OPT:unroll_times_max=8 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:46:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.