SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7310, 1.60 GHz)

SPECint®_rate2006 = 122

SPECint_rate_base2006 = 111

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Aug-2007
Hardware Availability: Oct-2007
Software Availability: Nov-2007

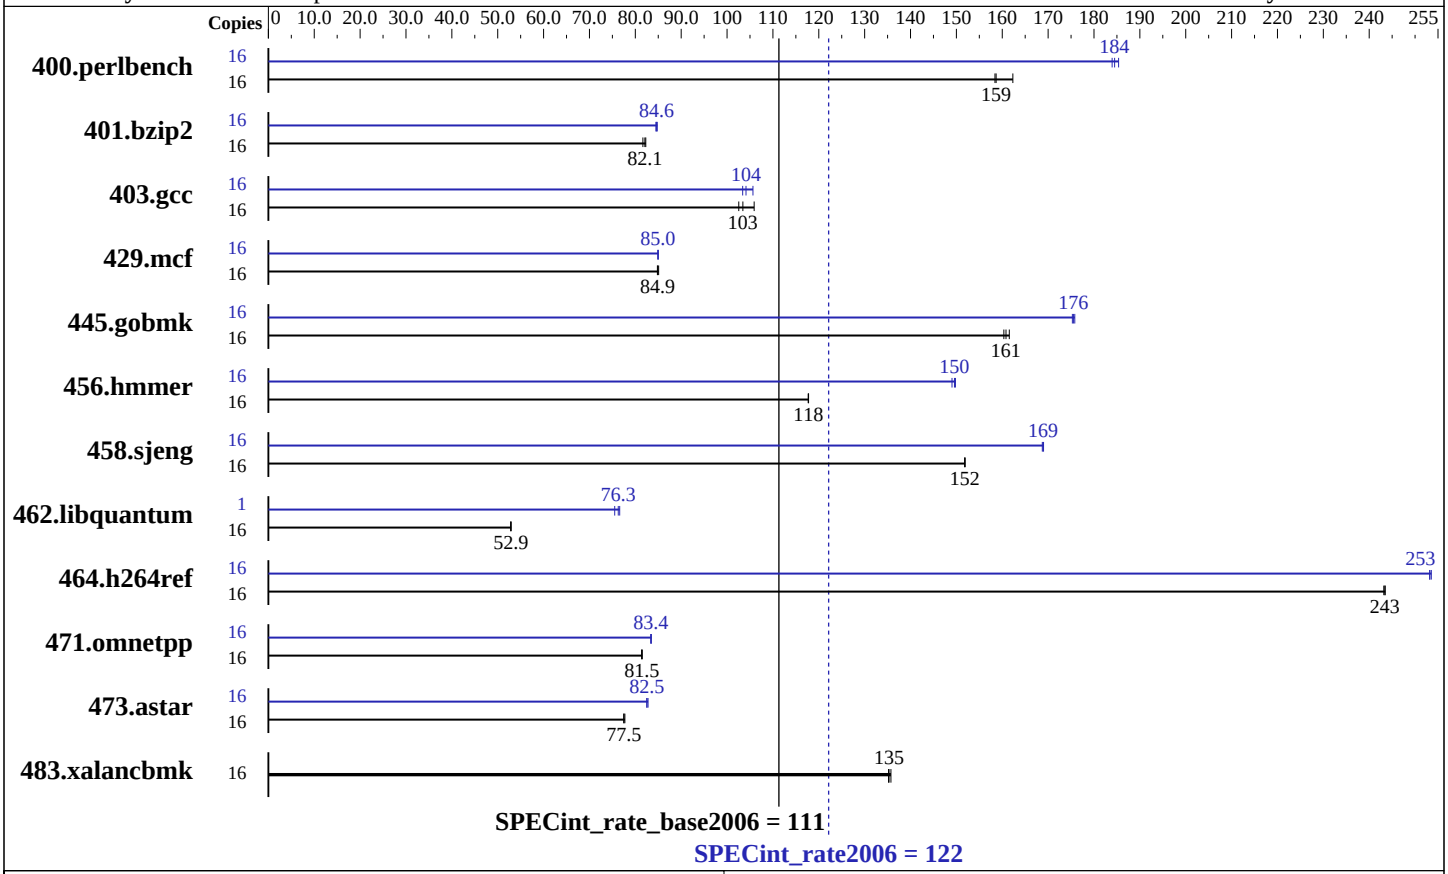

Hardware

CPU Name:	Intel Xeon E7310
CPU Characteristics:	Quad Core, 1.60 GHz
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (16 * 1GB Samsung DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	Seagate, SAS, 73GB, 10Krpm, 1 disk only
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 SP1, Kernel linux-cbgm 2.6.16.43-0.5-smp for x86_64
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7310, 1.60 GHz)

SPECint_rate2006 = 122

SPECint_rate_base2006 = 111

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Aug-2007
Hardware Availability: Oct-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	963	162	987	158	**985**	**159**	16	**847**	**184**	843	185	850	184
401.bzip2	16	1891	81.7	**1881**	**82.1**	1876	82.3	16	1821	84.8	**1824**	**84.6**	1828	84.5
403.gcc	16	1216	106	1256	103	**1245**	**103**	16	1219	106	**1237**	**104**	1246	103
429.mcf	16	1715	85.1	**1719**	**84.9**	1721	84.8	16	1719	84.9	1717	85.0	**1717**	**85.0**
445.gobmk	16	1039	162	1047	160	**1044**	**161**	16	958	175	955	176	**956**	**176**
456.hmmer	16	**1268**	**118**	1268	118	1268	118	16	997	150	**998**	**150**	1002	149
458.sjeng	16	**1275**	**152**	1275	152	1275	152	16	1146	169	1147	169	**1146**	**169**
462.libquantum	16	6264	52.9	**6272**	**52.9**	6275	52.8	1	274	75.5	271	76.6	**272**	**76.3**
464.h264ref	16	1454	243	1456	243	**1455**	**243**	16	**1398**	**253**	1397	254	1398	253
471.omnetpp	16	1227	81.5	1229	81.4	**1227**	**81.5**	16	1200	83.4	1198	83.5	**1198**	**83.4**
473.astar	16	1445	77.7	1450	77.5	**1449**	**77.5**	16	1362	82.5	**1361**	**82.5**	1357	82.8
483.xalancbmk	16	**816**	**135**	813	136	817	135	16	**816**	**135**	813	136	817	135

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios settings:
Hardware Prefetcher:      Disabled
Adjacent Sector Prefetch: Disabled
High Bandwidth Option:    Disabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include`

456.hmmer: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.46.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.46.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:04:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.