



SPEC® CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 12.4

PowerEdge 2950 (Intel Xeon 5110, 1.60 GHz)

SPECint_base2006 = 11.2

CPU2006 license: 55


Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Jul-2006

Tested by: Dell Inc.

Software Availability: Nov-2006

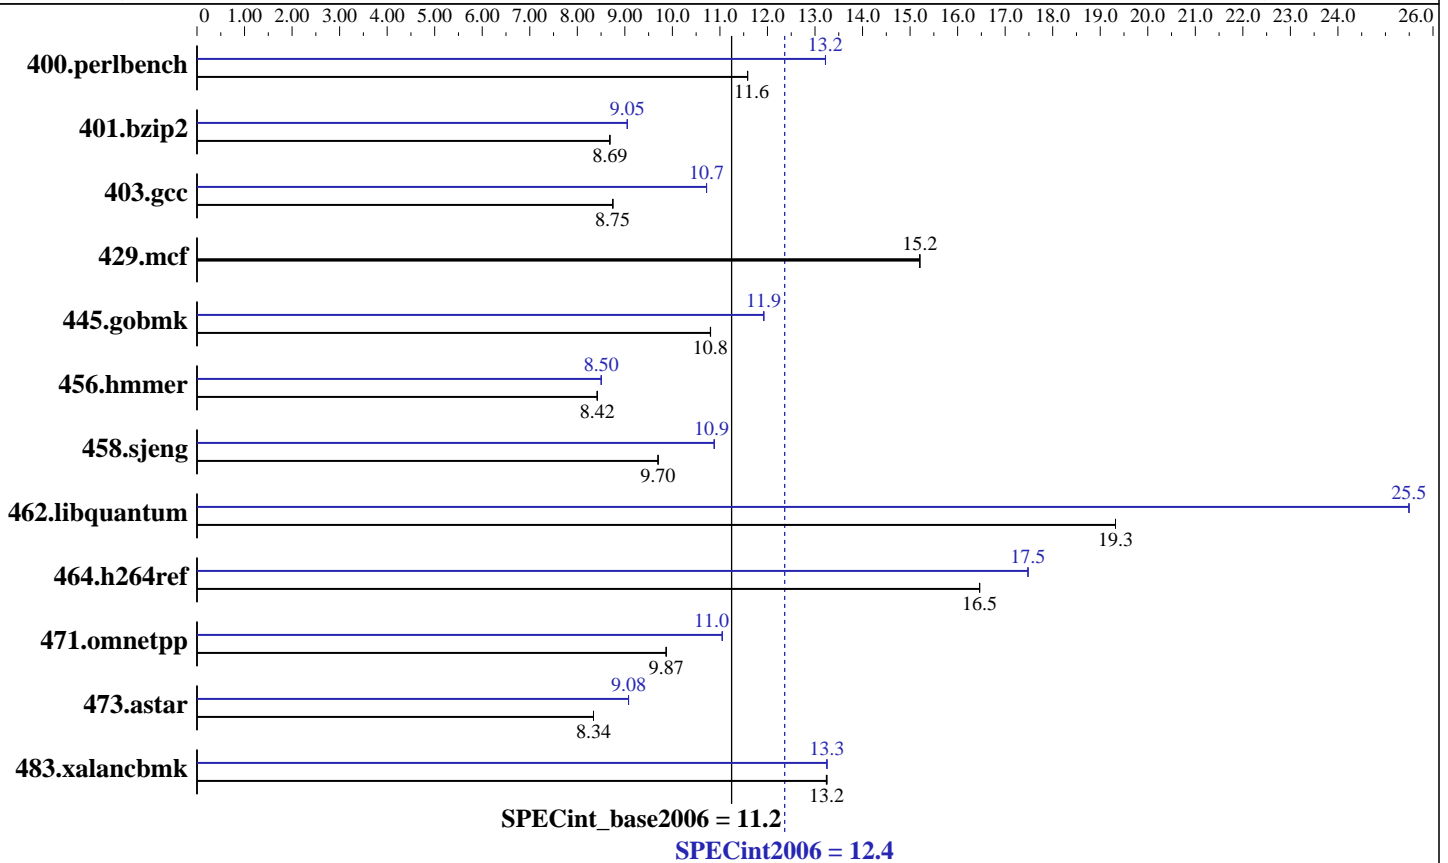

Hardware

CPU Name: Intel Xeon 5110
 CPU Characteristics: 1066 MHz Bus Speed
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8 x 1 GB 667MHz CL5 DDR2 FB-DIMM SDRAM)
 Disk Subsystem: 1 x 73 GB SAS 10K RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows Server 2003 Enterprise x64 Edition
 Compiler: Intel C++ Compiler for IA32 version 10.0
 Build 20070426 Package ID: W_CC_P_10.0.025
 Microsoft Visual Studio .Net 2003 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library Version 8.0



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 12.4

PowerEdge 2950 (Intel Xeon 5110, 1.60 GHz)

SPECint_base2006 = 11.2

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Jul-2006
Software Availability: Nov-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	844	11.6	844	11.6	844	11.6	739	13.2	739	13.2	739	13.2
401.bzip2	1111	8.69	1111	8.69	1111	8.68	1066	9.05	1066	9.05	1066	9.05
403.gcc	920	8.75	920	8.75	920	8.75	751	10.7	751	10.7	751	10.7
429.mcf	600	15.2	600	15.2	600	15.2	600	15.2	600	15.2	600	15.2
445.gobmk	971	10.8	971	10.8	971	10.8	880	11.9	880	11.9	880	11.9
456.hmmmer	1108	8.42	1108	8.42	1108	8.42	1097	8.50	1097	8.50	1097	8.50
458.sjeng	1248	9.70	1248	9.70	1248	9.70	1112	10.9	1112	10.9	1112	10.9
462.libquantum	1072	19.3	1072	19.3	1072	19.3	813	25.5	813	25.5	813	25.5
464.h264ref	1344	16.5	1344	16.5	1344	16.5	1266	17.5	1266	17.5	1266	17.5
471.omnetpp	633	9.87	633	9.87	633	9.87	566	11.0	566	11.0	566	11.0
473.astar	842	8.34	842	8.34	842	8.34	773	9.08	773	9.08	773	9.08
483.xalancbmk	521	13.2	521	13.3	521	13.2	521	13.3	521	13.2	521	13.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 12.4

PowerEdge 2950 (Intel Xeon 5110, 1.60 GHz)

SPECint_base2006 = 11.2

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Jul-2006
Software Availability: Nov-2006

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qprefetch /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
shlw32m.lib -link /FORCE:MULTIPLE

403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
-link /FORCE:MULTIPLE

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
-Qprec_div- -Qansi-alias /F512000000
-link /FORCE:MULTIPLE

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

462.libquantum: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
-Ob0 -Qprefetch -Qopt-streaming-stores:always /F512000000
shlw32m.lib -link /FORCE:MULTIPLE

464.h264ref: Same as 456.hmmer

C++ benchmarks:

-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Dell-Intel-ic10-ia32.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Dell-Intel-ic10-ia32.20090714.00.xml>



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 12.4

PowerEdge 2950 (Intel Xeon 5110, 1.60 GHz)

SPECint_base2006 = 11.2

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Jul-2006

Tested by: Dell Inc.

Software Availability: Nov-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 14 19:00:31 2009 by SPEC CPU2006 PS/PDF formatter v6323.