SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 M2 (Intel Xeon X7350)

SPECint®_rate2006 = 211

SPECint_rate_base2006 = 184

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

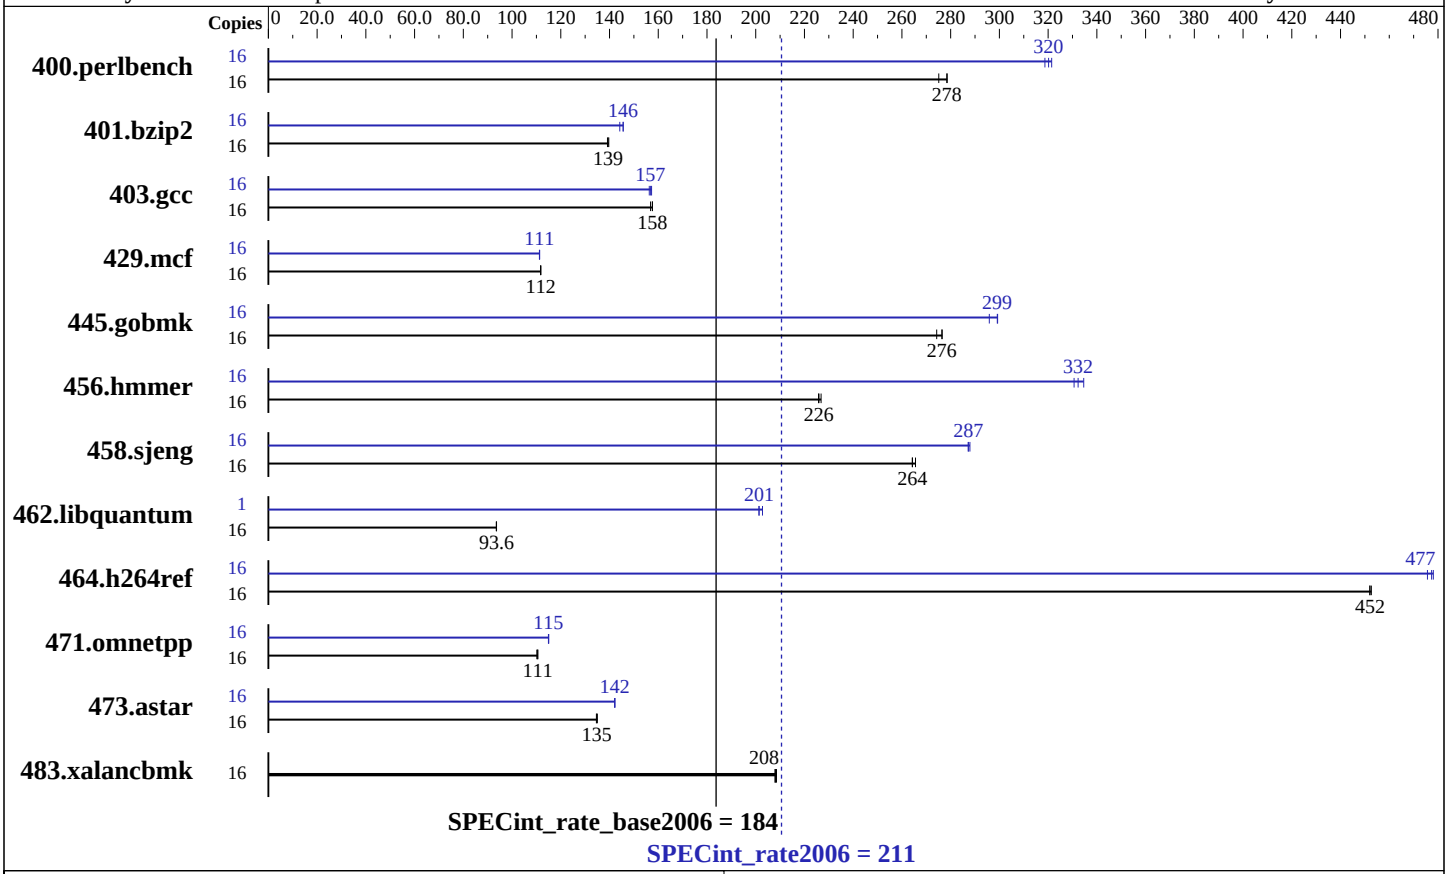

Hardware

CPU Name:	Intel Xeon X7350
CPU Characteristics:	Quad Core, 2.93 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	64 GB (16 * 4GB DDR2-5300 ECC)
Disk Subsystem:	73 GB SATA, 10k RPM
Other Hardware:	None

Software

Operating System:	SLES 10 SP1 (x86_64), 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 M2 (Intel Xeon X7350)

SPECint_rate2006 = 211

SPECint_rate_base2006 = 184

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	561	279	568	275	**561**	**278**	16	486	321	**488**	**320**	491	319
401.bzip2	16	**1107**	**139**	1105	140	1109	139	16	1060	146	1071	144	**1060**	**146**
403.gcc	16	**817**	**158**	817	158	821	157	16	819	157	824	156	**821**	**157**
429.mcf	16	1306	112	**1306**	**112**	1305	112	16	1312	111	**1311**	**111**	1311	111
445.gobmk	16	612	274	607	277	**607**	**276**	16	**561**	**299**	567	296	561	299
456.hmmer	16	658	227	**661**	**226**	661	226	16	**449**	**332**	451	331	446	335
458.sjeng	16	733	264	729	266	**732**	**264**	16	672	288	**674**	**287**	674	287
462.libquantum	16	3541	93.6	3545	93.5	**3541**	**93.6**	1	102	203	103	201	**103**	**201**
464.h264ref	16	783	452	**783**	**452**	782	453	16	**742**	**477**	741	478	744	476
471.omnetpp	16	905	111	**905**	**111**	908	110	16	869	115	**870**	**115**	870	115
473.astar	16	832	135	**833**	**135**	834	135	16	**790**	**142**	790	142	790	142
483.xalancbmk	16	529	209	531	208	**531**	**208**	16	529	209	531	208	**531**	**208**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios settings:
Hardware Prefetcher:      Disabled
Adjacent Sector Prefetch: Disabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
OMP_NUM_THREADS set to number of core
KMP_AFFINITY set to physical,0
KMP_STACK_SIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
```

456.hmmer:
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.15.html`

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.15.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 14:01:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 October 2007.