SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7330, 2.40 GHz)

SPECint®2006 = 20.1

SPECint_base2006 = 17.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Aug-2007
Hardware Availability: Oct-2007
Software Availability: Nov-2007

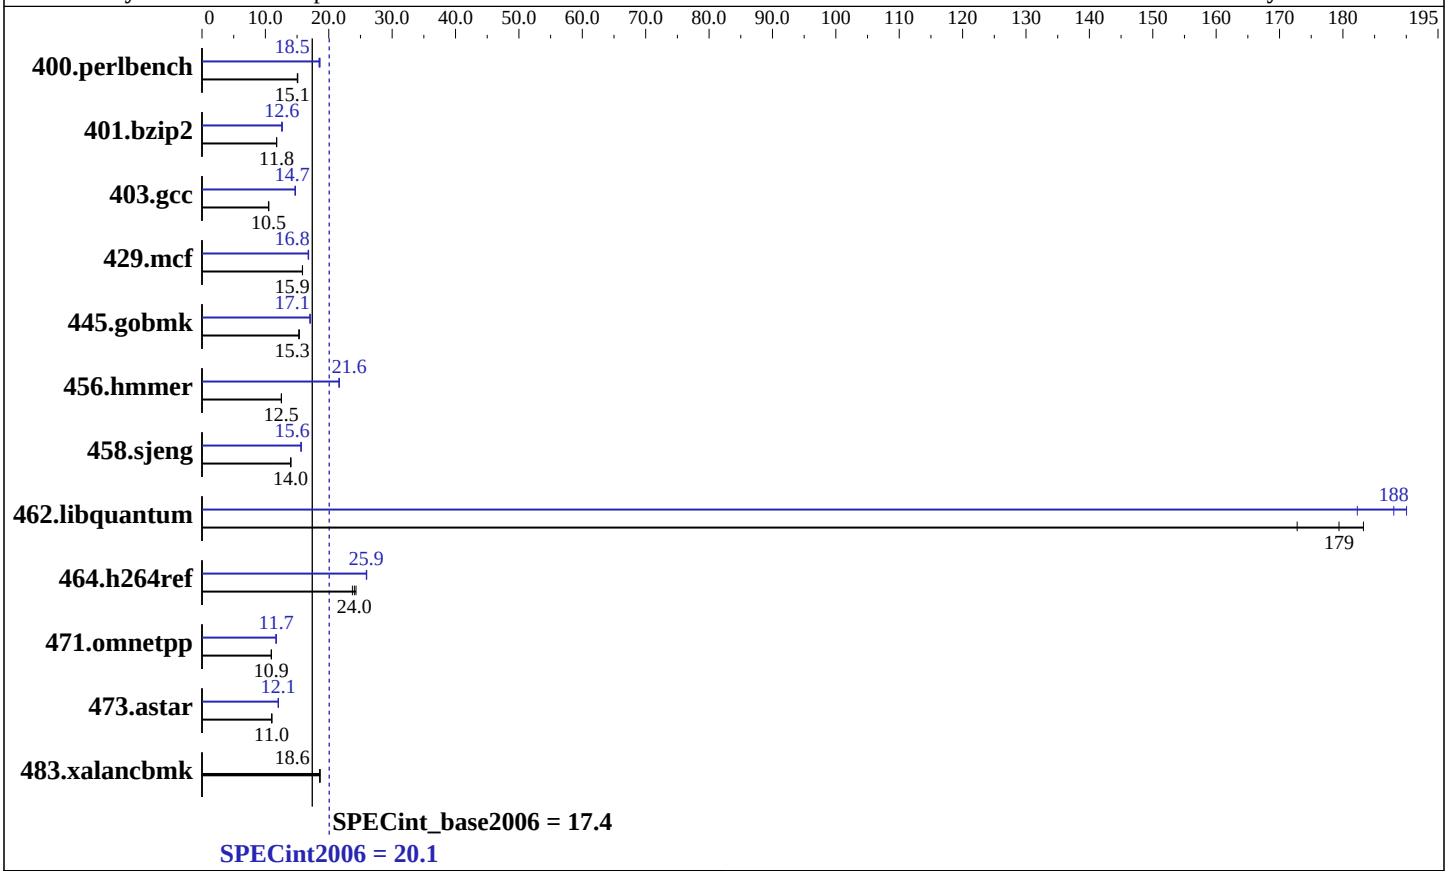

Hardware

CPU Name:	Intel Xeon E7330
CPU Characteristics:	Quad Core, 2.40 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip, 3 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (16 * 1GB Samsung DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	Seagate, SAS, 73GB, 10Krpm, 1 disk only
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 SP1 RC1, Kernel linux-cbgm 2.6.16.43-0.5-smp for x86_64
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7330, 2.40 GHz)

SPECint2006 = 20.1

SPECint_base2006 = 17.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Aug-2007
Hardware Availability: Oct-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	650	15.0	**648**	**15.1**	647	15.1	525	18.6	529	18.5	**527**	**18.5**
401.bzip2	819	11.8	820	11.8	**820**	**11.8**	762	12.7	767	12.6	**765**	**12.6**
403.gcc	**765**	**10.5**	768	10.5	765	10.5	**546**	**14.7**	549	14.7	546	14.8
429.mcf	575	15.9	**575**	**15.9**	576	15.8	**543**	**16.8**	542	16.8	545	16.7
445.gobmk	685	15.3	**685**	**15.3**	685	15.3	615	17.1	615	17.1	**615**	**17.1**
456.hmmer	745	12.5	**745**	**12.5**	745	12.5	431	21.7	432	21.6	**431**	**21.6**
458.sjeng	866	14.0	862	14.0	**865**	**14.0**	775	15.6	**774**	**15.6**	773	15.7
462.libquantum	113	183	**116**	**179**	120	173	**110**	**188**	114	182	109	190
464.h264ref	**921**	**24.0**	933	23.7	911	24.3	851	26.0	853	25.9	**853**	**25.9**
471.omnetpp	571	10.9	571	10.9	**571**	**10.9**	534	11.7	535	11.7	**534**	**11.7**
473.astar	639	11.0	**638**	**11.0**	637	11.0	**582**	**12.1**	582	12.1	584	12.0
483.xalancbmk	370	18.6	371	18.6	**371**	**18.6**	370	18.6	371	18.6	**371**	**18.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios settings:
Hardware Prefetcher:      Disabled
Adjacent Sector Prefetch: Disabled
High Bandwidth Option:    Disabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -vec-guard-write -parallel -par-runtime-control`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include`

456.hmmer: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.28.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.28.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:48:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2007.