SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon E5205)

SPECint®2006 = 16.7

SPECint_base2006 = 14.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

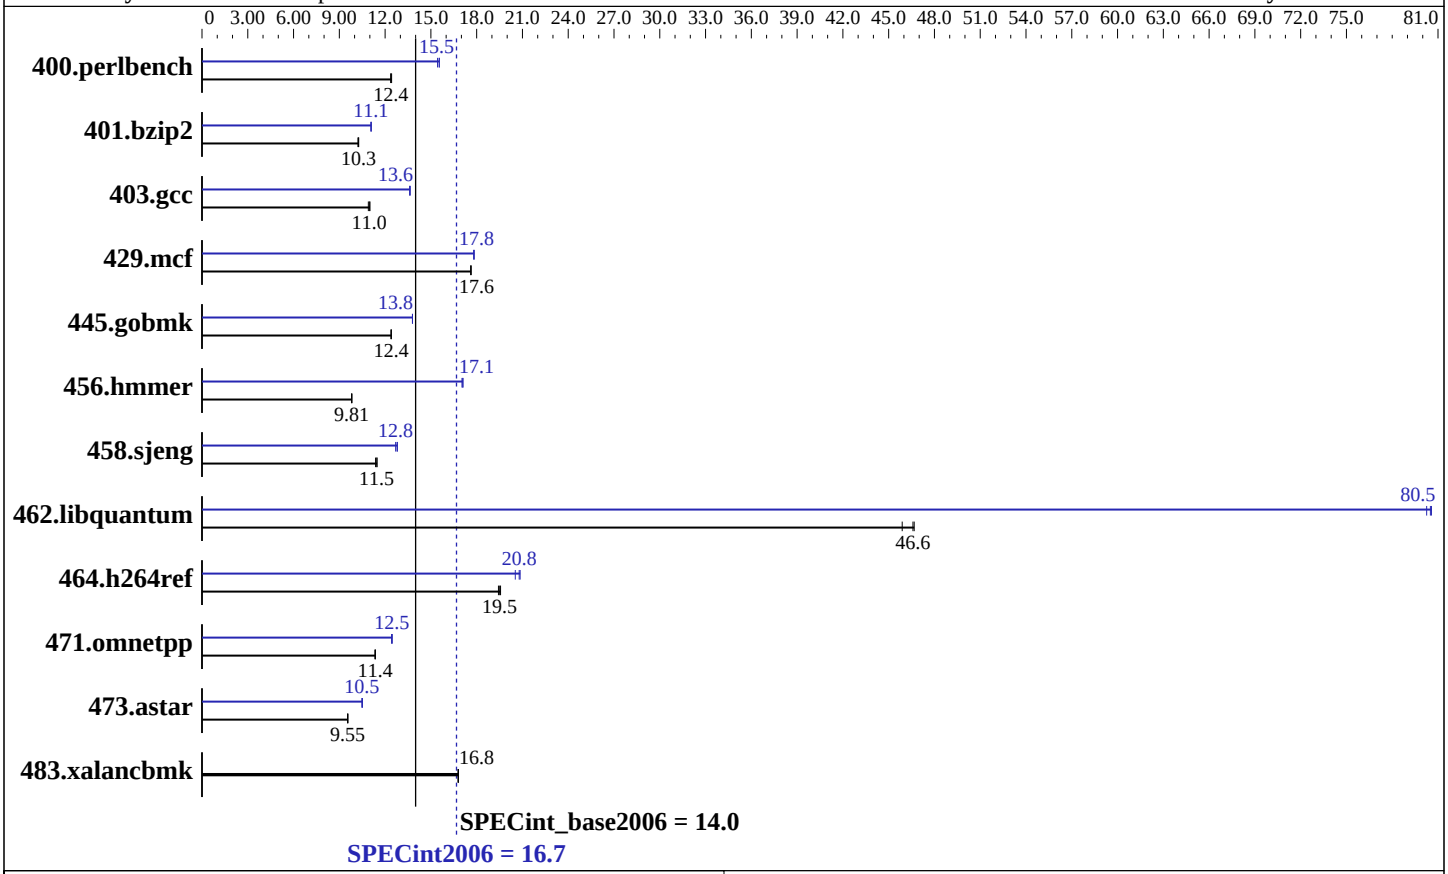

Hardware

CPU Name:	Intel Xeon E5205
CPU Characteristics:	1.86 GHz, 6 MB L2, 1066 MHz bus
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73.2 GB SAS, 10000RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-6
(Intel Xeon E5205)

SPECint2006 = 16.7

SPECint_base2006 = 14.0

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2008
Hardware Availability: Feb-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**789**	**12.4**	790	12.4	786	12.4	633	15.4	**628**	**15.5**	628	15.6
401.bzip2	944	10.2	940	10.3	**941**	**10.3**	**871**	**11.1**	871	11.1	871	11.1
403.gcc	**734**	**11.0**	738	10.9	731	11.0	**591**	**13.6**	591	13.6	590	13.6
429.mcf	517	17.6	518	17.6	**517**	**17.6**	**512**	**17.8**	512	17.8	511	17.8
445.gobmk	846	12.4	**846**	**12.4**	846	12.4	760	13.8	761	13.8	**760**	**13.8**
456.hmmer	**951**	**9.81**	950	9.82	951	9.81	545	17.1	548	17.0	**546**	**17.1**
458.sjeng	1064	11.4	**1056**	**11.5**	1055	11.5	945	12.8	**946**	**12.8**	954	12.7
462.libquantum	444	46.7	**445**	**46.6**	452	45.9	**257**	**80.5**	257	80.6	258	80.3
464.h264ref	**1134**	**19.5**	1139	19.4	1131	19.6	1078	20.5	**1065**	**20.8**	1061	20.8
471.omnetpp	550	11.4	**550**	**11.4**	551	11.3	503	12.4	**502**	**12.5**	502	12.5
473.astar	736	9.54	**735**	**9.55**	734	9.56	668	10.5	670	10.5	**669**	**10.5**
483.xalancbmk	**411**	**16.8**	411	16.8	411	16.8	**411**	**16.8**	411	16.8	411	16.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-fast -vec-guard-write -parallel -par-runtime-control
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090714.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.20090714.00.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:40:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2008.