SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3455 (AMD Opteron 2360 SE)

SPECint®2006 = 15.2

SPECint_base2006 = 13.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: Advanced Micro Devices

Test date: Apr-2008
Hardware Availability: Jul-2008
Software Availability: May-2008

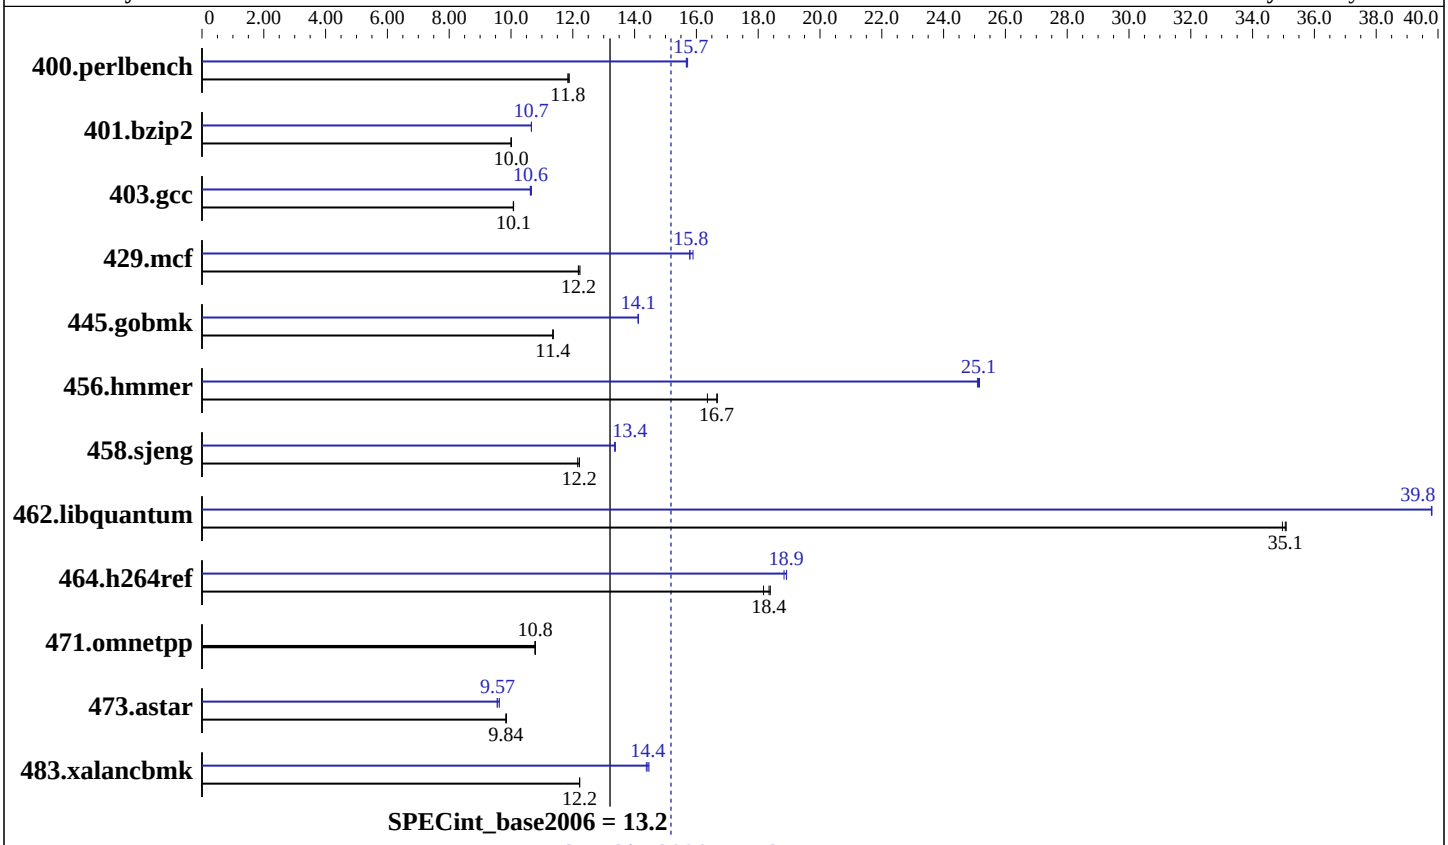

Hardware

CPU Name:	AMD Opteron 2360 SE
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (8 x 2 GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 160 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Runlevel 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3455 (AMD Opteron 2360 SE)

SPECint2006 = 15.2

SPECint_base2006 = 13.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: Advanced Micro Devices

Test date: Apr-2008
Hardware Availability: Jul-2008
Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	822	11.9	825	11.8	**825**	**11.8**	**623**	**15.7**	622	15.7	623	15.7
401.bzip2	**964**	**10.0**	964	10.0	965	10.0	905	10.7	905	10.7	**905**	**10.7**
403.gcc	799	10.1	798	10.1	**798**	**10.1**	755	10.7	758	10.6	**757**	**10.6**
429.mcf	749	12.2	746	12.2	**748**	**12.2**	578	15.8	574	15.9	**578**	**15.8**
445.gobmk	**924**	**11.4**	923	11.4	924	11.4	743	14.1	**743**	**14.1**	743	14.1
456.hmmer	570	16.4	**560**	**16.7**	559	16.7	371	25.2	**371**	**25.1**	372	25.1
458.sjeng	**991**	**12.2**	995	12.2	991	12.2	**905**	**13.4**	906	13.4	905	13.4
462.libquantum	593	35.0	**591**	**35.1**	591	35.1	521	39.8	**521**	**39.8**	521	39.8
464.h264ref	1203	18.4	1218	18.2	**1206**	**18.4**	**1170**	**18.9**	1170	18.9	1175	18.8
471.omnetpp	579	10.8	**579**	**10.8**	580	10.8	579	10.8	**579**	**10.8**	580	10.8
473.astar	**713**	**9.84**	713	9.85	714	9.84	729	9.62	735	9.55	**734**	**9.57**
483.xalancbmk	565	12.2	**565**	**12.2**	565	12.2	**478**	**14.4**	477	14.5	480	14.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
powersave -f was used to set the CPU frequency to its maximum.
```

Base Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks:
`pgcpp`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:
-w

C++ benchmarks:
-w

Peak Compiler Invocation

C benchmarks (except as noted below):
pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):
pathCC

471.omnetpp: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
-Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
-Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
-fastsse -Msmartalloc=huge:150 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w`

400.perlbench: `No flags used`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.03.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.03.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:27:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.