



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5410, 2.33 GHz)

SPECint<sup>®</sup>2006 = 21.6

SPECint\_base2006 = 18.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jun-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

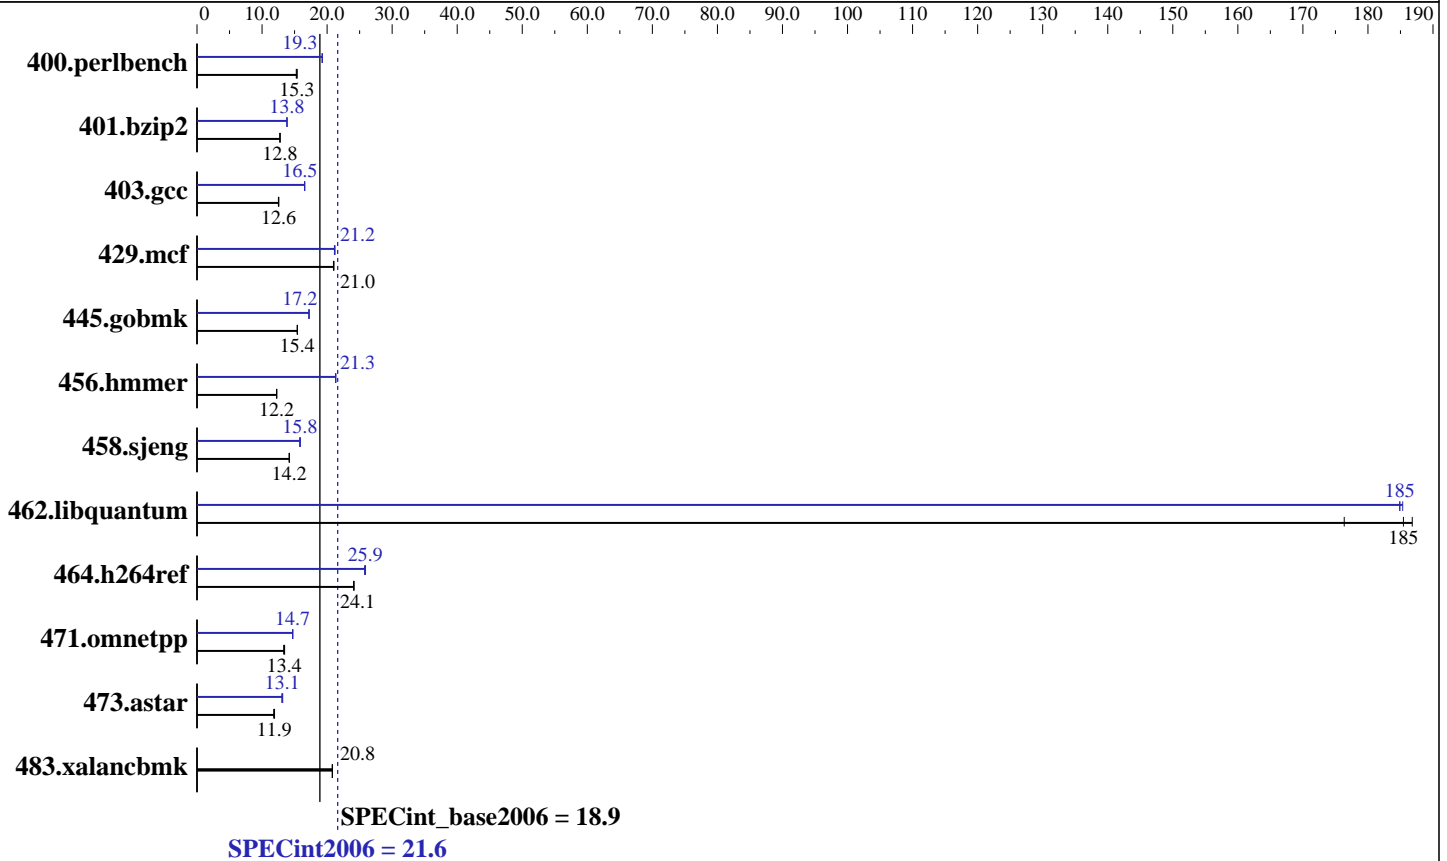

### Hardware

CPU Name: Intel Xeon E5410  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB) FB-DIMM PC2-5300F ECC CL5  
 Disk Subsystem: 1x73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE LINUX Enterprise Server 10 SP1  
 Kernel 2.6.16.46-0.12-smp for x86\_64  
 Compiler: Intel C++ Compiler 10.1 for Linux  
 Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.50.0.15  
 SmartHeap library V8.1



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5410, 2.33 GHz)

SPECint2006 = 21.6

SPECint\_base2006 = 18.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jun-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	635	15.4	640	15.3	<u>637</u>	<u>15.3</u>	507	19.3	507	19.3	<u>507</u>	<u>19.3</u>
401.bzip2	756	12.8	757	12.7	<u>756</u>	<u>12.8</u>	697	13.8	<u>698</u>	<u>13.8</u>	698	13.8
403.gcc	641	12.6	<u>641</u>	<u>12.6</u>	643	12.5	<u>487</u>	<u>16.5</u>	487	16.5	486	16.6
429.mcf	<u>434</u>	<u>21.0</u>	434	21.0	435	21.0	<u>431</u>	<u>21.2</u>	430	21.2	432	21.1
445.gobmk	680	15.4	680	15.4	<u>680</u>	<u>15.4</u>	<u>609</u>	<u>17.2</u>	610	17.2	609	17.2
456.hmmer	<u>762</u>	<u>12.2</u>	761	12.3	763	12.2	437	21.3	<u>438</u>	<u>21.3</u>	438	21.3
458.sjeng	852	14.2	854	14.2	<u>852</u>	<u>14.2</u>	<u>764</u>	<u>15.8</u>	762	15.9	767	15.8
462.libquantum	111	187	117	176	<u>112</u>	<u>185</u>	<u>112</u>	<u>185</u>	112	185	112	185
464.h264ref	917	24.1	<u>917</u>	<u>24.1</u>	919	24.1	854	25.9	859	25.8	<u>855</u>	<u>25.9</u>
471.omnetpp	469	13.3	464	13.5	<u>465</u>	<u>13.4</u>	<u>425</u>	<u>14.7</u>	425	14.7	425	14.7
473.astar	595	11.8	<u>590</u>	<u>11.9</u>	589	11.9	533	13.2	<u>536</u>	<u>13.1</u>	538	13.0
483.xalancbmk	332	20.8	<u>331</u>	<u>20.8</u>	331	20.8	332	20.8	<u>331</u>	<u>20.8</u>	331	20.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to null
```

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode  
The Bull NovaScale R440 E1 (Intel Xeon E5410, 2.33 GHz) and the Bull NovaScale R460 E1 (Intel Xeon E5410, 2.33 GHz) models are electronically equivalent.  
The results have been measured on a Bull NovaScale R460 E1 (Intel Xeon E5410, 2.33 GHz) model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5410, 2.33 GHz)

SPECint2006 = 21.6

SPECint\_base2006 = 18.9

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Jun-2008  
**Hardware Availability:** Jan-2008  
**Software Availability:** Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5410, 2.33 GHz)

SPECint2006 = 21.6

SPECint\_base2006 = 18.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jun-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

### C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmarheap

483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E1  
(Intel Xeon E5410, 2.33 GHz)

SPECint2006 = 21.6

SPECint\_base2006 = 18.9

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Jun-2008  
**Hardware Availability:** Jan-2008  
**Software Availability:** Nov-2007

## Peak Other Flags

Same as Base Other Flags

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_int\\_flags.20090713.00.html](http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090713.00.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_int\\_flags.20090713.00.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090713.00.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Mon Jul 13 18:54:54 2009 by SPEC CPU2006 PS/PDF formatter v6323.