SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS42 (AMD Opteron 8347 HE)

SPECint®_rate2006 = 156

SPECint_rate_base2006 = 134

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2008
Hardware Availability: Sep-2008
Software Availability: May-2008

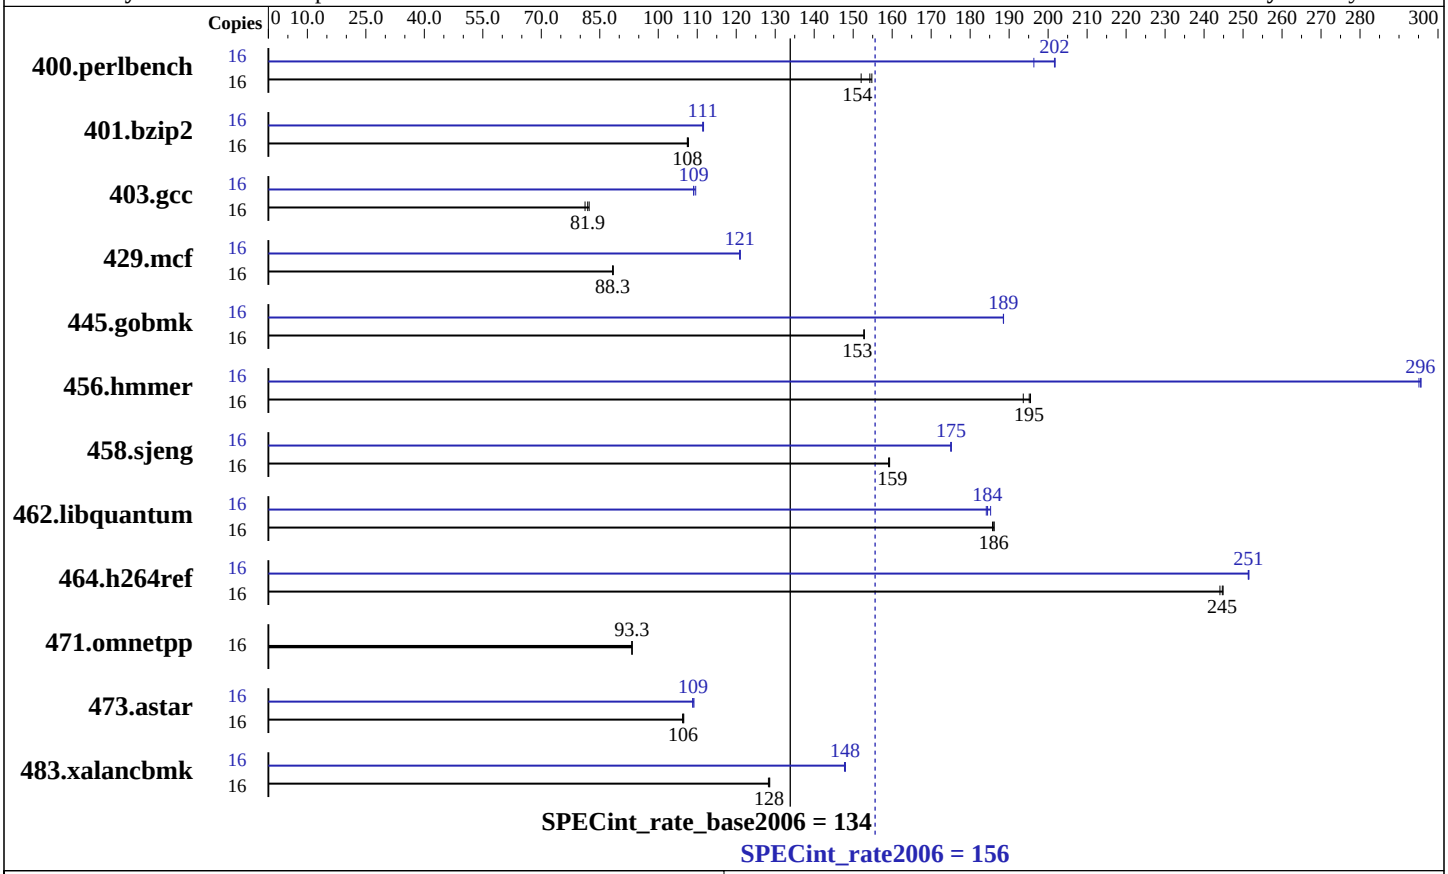

Hardware

CPU Name:	AMD Opteron 8347 HE
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16 x 4 GB DDR2-6400 ECC)
Disk Subsystem:	1 x 73 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ext2
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS42 (AMD Opteron 8347 HE)

SPECint_rate2006 = 156

SPECint_rate_base2006 = 134

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2008
Hardware Availability: Sep-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	1028	152	**1013**	**154**	1010	155	16	**775**	**202**	796	196	775	202
401.bzip2	16	1433	108	**1436**	**108**	1437	107	16	1386	111	**1385**	**111**	1383	112
403.gcc	16	1586	81.2	**1573**	**81.9**	1565	82.3	16	**1181**	**109**	1181	109	1175	110
429.mcf	16	**1652**	**88.3**	1649	88.5	1652	88.3	16	1205	121	**1206**	**121**	1207	121
445.gobmk	16	**1099**	**153**	1098	153	1099	153	16	890	189	**890**	**189**	890	189
456.hmmer	16	**765**	**195**	764	195	771	194	16	**505**	**296**	505	296	506	295
458.sjeng	16	1217	159	**1216**	**159**	1215	159	16	1105	175	1106	175	**1106**	**175**
462.libquantum	16	1781	186	1785	186	**1782**	**186**	16	1790	185	1800	184	**1797**	**184**
464.h264ref	16	**1447**	**245**	1446	245	1451	244	16	1408	252	**1409**	**251**	1409	251
471.omnetpp	16	**1072**	**93.3**	1072	93.3	1072	93.3	16	**1072**	**93.3**	1072	93.3	1072	93.3
473.astar	16	1057	106	1054	107	**1055**	**106**	16	1029	109	**1031**	**109**	1032	109
483.xalancbmk	16	859	129	861	128	**859**	**128**	16	**746**	**148**	746	148	747	148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 4915200'  was used to set environment locked pages in memory limit
Environment variable PGI_HUGE_PAGES set to 896
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
Processor Performance States Disabled in BIOS
Memory ChipKill Disabled in BIOS
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:
-w -Mipa=jobs:4

C++ benchmarks:
-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):
pathCC

471.omnetpp: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w -Mipa=jobs:4`(pass 2)

400.perlbench: `No flags used`

401.bzip2: `-w`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w -Mipa=jobs:4`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:08:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.