



SPEC[®] CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]2006 = 17.6

PowerEdge 2900 III (Intel Xeon E5205, 1.86 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55


Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

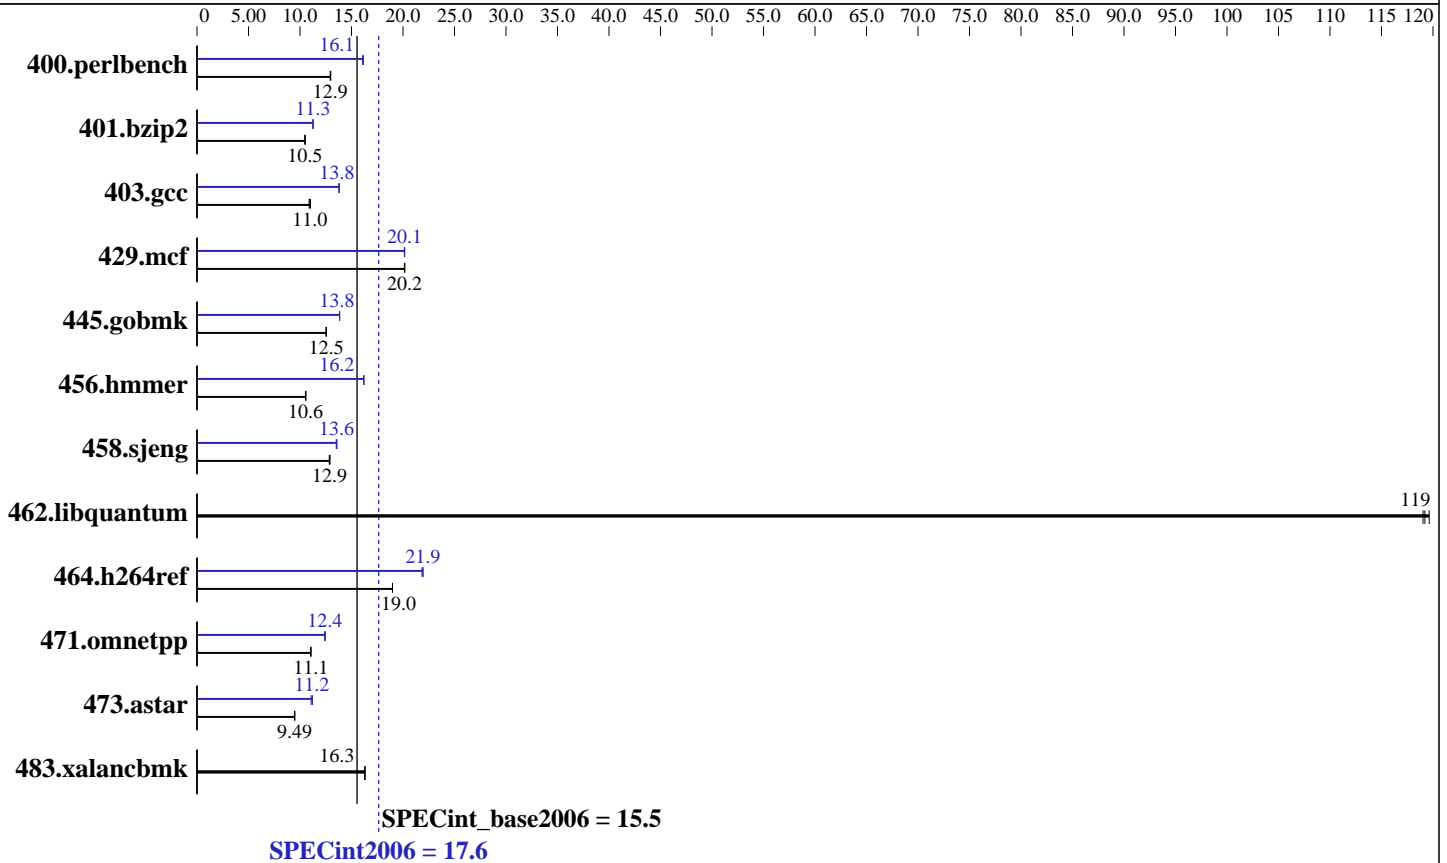

Hardware

CPU Name: Intel Xeon E5205
 CPU Characteristics:
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB, DDR2-667 MHz, CL5, Reg, Dual Rank)
 Disk Subsystem: 2 x 73 GB GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 17.6

PowerEdge 2900 III (Intel Xeon E5205, 1.86 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	754	12.9	752	13.0	755	12.9	608	16.1	606	16.1	605	16.1
401.bzip2	919	10.5	922	10.5	921	10.5	856	11.3	857	11.3	857	11.3
403.gcc	734	11.0	740	10.9	731	11.0	584	13.8	583	13.8	584	13.8
429.mcf	453	20.1	452	20.2	452	20.2	453	20.1	453	20.1	452	20.2
445.gobmk	836	12.5	836	12.5	836	12.5	758	13.8	758	13.8	758	13.8
456.hmmmer	884	10.6	884	10.6	884	10.6	576	16.2	577	16.2	576	16.2
458.sjeng	938	12.9	938	12.9	942	12.8	891	13.6	893	13.6	895	13.5
462.libquantum	174	119	174	119	173	120	174	119	174	119	173	120
464.h264ref	1166	19.0	1166	19.0	1166	19.0	1009	21.9	1008	21.9	1013	21.8
471.omnetpp	565	11.1	567	11.0	565	11.1	502	12.4	504	12.4	503	12.4
473.astar	739	9.49	740	9.49	742	9.46	634	11.1	626	11.2	629	11.2
483.xalanbmk	423	16.3	424	16.3	423	16.3	423	16.3	424	16.3	423	16.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalanbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 17.6

PowerEdge 2900 III (Intel Xeon E5205, 1.86 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 17.6

PowerEdge 2900 III (Intel Xeon E5205, 1.86 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmr: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

Same as Base Other Flags

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.06.html>



SPEC CINT2006 Result

Copyright 2006-2009 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 17.6

PowerEdge 2900 III (Intel Xeon E5205, 1.86 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55

Test date: Sep-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.06.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Mon Jul 13 13:11:44 2009 by SPEC CPU2006 PS/PDF formatter v6323.