SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2372 HE, 2.10 GHz)

SPECint®2006 = 16.8

SPECint_base2006 = 13.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2009
Hardware Availability: Feb-2009
Software Availability: Oct-2008

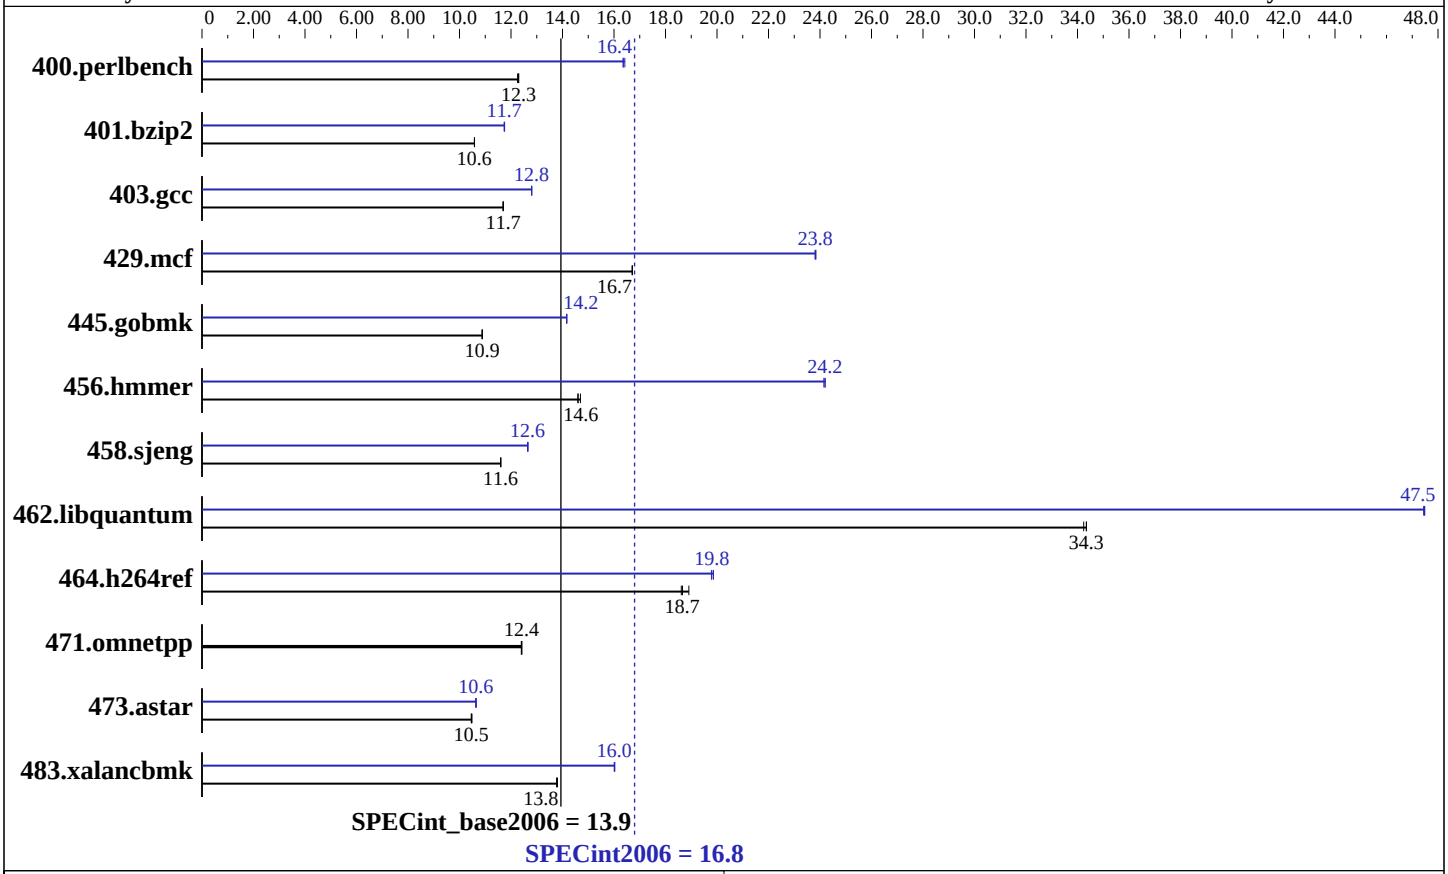

Hardware

CPU Name:	AMD Opteron 2372 HE
CPU Characteristics:	
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB DDR2-800)
Disk Subsystem:	1 x 73 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2372 HE, 2.10 GHz)

SPECint2006 = 16.8

SPECint_base2006 = 13.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2009
Hardware Availability: Feb-2009
Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	797	12.3	794	12.3	**795**	**12.3**	**597**	**16.4**	598	16.3	595	16.4
401.bzip2	912	10.6	912	10.6	**912**	**10.6**	822	11.7	**821**	**11.7**	821	11.8
403.gcc	688	11.7	**688**	**11.7**	689	11.7	**629**	**12.8**	628	12.8	629	12.8
429.mcf	546	16.7	546	16.7	**546**	**16.7**	382	23.8	383	23.8	**383**	**23.8**
445.gobmk	964	10.9	**964**	**10.9**	963	10.9	740	14.2	741	14.2	**741**	**14.2**
456.hmmer	635	14.7	639	14.6	**639**	**14.6**	**386**	**24.2**	386	24.1	385	24.2
458.sjeng	1044	11.6	1043	11.6	**1043**	**11.6**	**957**	**12.6**	955	12.7	957	12.6
462.libquantum	603	34.3	605	34.2	**603**	**34.3**	437	47.4	**436**	**47.5**	436	47.5
464.h264ref	**1186**	**18.7**	1170	18.9	1189	18.6	1114	19.9	**1118**	**19.8**	1119	19.8
471.omnetpp	503	12.4	**504**	**12.4**	504	12.4	503	12.4	**504**	**12.4**	504	12.4
473.astar	671	10.5	**671**	**10.5**	670	10.5	**660**	**10.6**	659	10.6	661	10.6
483.xalancbmk	**501**	**13.8**	500	13.8	501	13.8	**431**	**16.0**	431	16.0	430	16.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores
```

Operating System Notes

```
The libhugetlbfs libraries were installed using the
installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7146 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006_1.1/amd909gh-libs/64:/root/cpu2006_1.1/amd909gh-libs/32"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:4

C++ benchmarks:
-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):
pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
-IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
-CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
-OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
-m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
-LNO:trip_count=256 -LNO:prefetch_ahead=10
-CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-L/usr/lib -lhugetlbfs

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
--zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/root/work/libraries/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

456.hmmer: `-Mipa=jobs:4`

462.libquantum: `-Mipa=jobs:4`

C++ benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

483.xalancbmk: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:06:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2009.